

Project Name:	Type:
Notes:	Order Matrix Number:


DOCKSIDE 1

Available in five sizes of radial wave style shades, up to 24" diameter, with a clear, frosted, or opal globe diffuser, the *Dockside 1* is an excellent performing outdoor pendant mounted fixture with a nostalgic style. Suitable for cross arm, ceiling (chain or stem), or wall mounting conditions, the *Dockside 1* is often specified for restaurants, shopping malls, court houses, museums, historical sites, government buildings, schools and universities, parking lots, site and walkway lighting, lighting for "Old Town" sections of cities, and much more.



Constructed of high grade aluminum and finished with a powder-coated finish, with the inside finished in white to maximize optics, the *Dockside 1* is built to endure all outdoor conditions. The *Dockside 1* is available in up to a maximum 150 watt Metal Halide or High Pressure Sodium and can also accommodate today's Low-Energy requirements with an assortment of CFL lamps up to 57 watts.


The *Dockside 1* has everything you need: Style, durability, and excellent performance to meet many of today's lighting specifications.

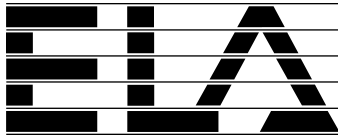

1	2	3	4	5	6	7	8	9
Fixture	Size	Mounting	Optics	Ballast	Voltage	Lens	Color	Option
DK1	20	CA	V5	100PSMH	120	FA	CY	--

1. Fixture: DK1


2. Size

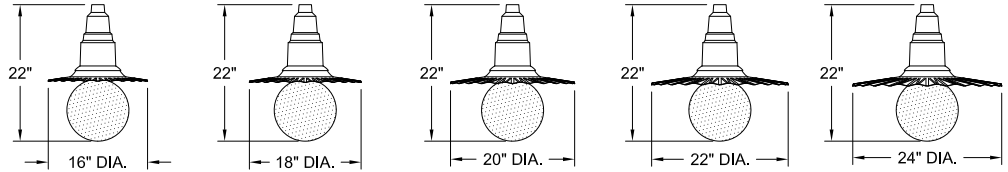

Matrix #:	16	18	20	22	24
Description:					
Notes:	Max Wattage 150W	Max Wattage 150W	Max Wattage 150W	Max Wattage 150W	Max Wattage 150W
EPA:	1.3	1.4	1.5	1.6	1.7
Weight:	21 lbs.	22 lbs.	23 lbs.	24 lbs.	24 lbs.

Notes:
 1. Standard size for all globes is 10" diameter.

3. Mounting

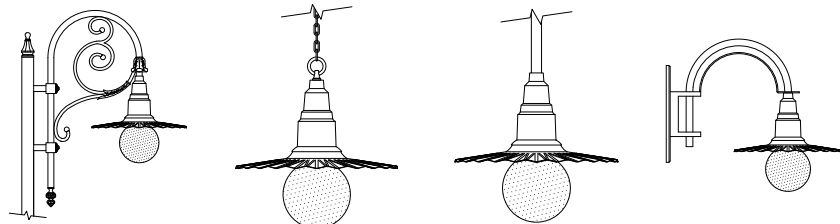


Matrix #:	CA	CP	SP	WB
Description:	Cross Arm	Chain Pendant	Stem Pendant	Wall Bracket

Notes:
 1. Please consult factory for other mounting options.

4. Optics

Vertical



Matrix #:
Description:




V5
TYPE 5




5. Ballast

Description:	Incandescent	Pulse Start Metal Halide	Metal Halide	High Pressure Sodium	Compact Fluorescent
	(Watts / Type)	(Watts / Type)	(Watts / Type)	(Watts / Type)	(Watts / Type)
Matrix #:	INC	50PSMH 70PSMH 100PSMH 150PSMH	50MH 70MH T6 70MH 100MH T6 150MH 150MH	50HPS 70HPS 100HPS 150HPS	13CFL 18CFL 26CFL 32CFL 42CFL 57CFL





Notes:
 1. Electronic ballast available for 50, 70, and 100 watt MH lamps.
 2. Other wattages available. Consult factory.

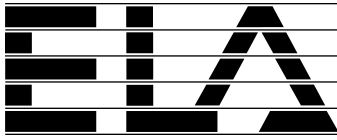


6. Voltage	Matrix #:	120	208	240	277	347	480
	Description:	120V	208V	240V	277V	347V	480V

7. Lens							
	Matrix #:	CA	CP	FA	FP	OA	OP
Notes:	Consult factory for custom lens options.						
	Description: Clear Acrylic			Description: Frosted Acrylic		Description: Opal Acrylic	
	Description: Clear Polycarbonate			Description: Frosted Polycarbonate		Description: Opal Polyethylene	

8. Color	Powder Coat Finish				Hand-Applied Finish			
	Matrix #	Description	Matrix #	Description	Matrix #	Description	Matrix #	Description
Notes:	Consult factory for custom colors.							
	AG	Augustine Green	MG	Malaga Green	CH	Cracked Hide	LV	Light Verde
	GY	Architectural Grey	MN	Midnight	OR	Old Iron	R	Rust
	CC	Charcoal	PW	Pewter	V	Verde		
	CY	Clay	SS	Sand Storm				
	DB	Dark Bronze	SB	Statuary Bronze				
	HR	Harbor Blue	VL	Village Green				
	HP	Hammered Pewter	W	White				

9. Options								
	BBU Battery Backup		TB Terminal Block		PCB Photocell Button		HSS House Side Shield	
Notes:	1. BBU option is available for fluorescent lamp only. 2. Test button location shall have visibility for testing on site. Consult factory for placement location.							
Photocell Options:	Photocell is available in 120 thru 480 volts. Consult factory. Specify when ordering.							

Fixture Ordering Example:




DK1/20/CA/V5/100PSMH/120/FA/CY

1	2	3	4	5	6	7	8	9
Fixture	Size	Mounting	Optics	Ballast	Voltage	Lens	Color	Option
DK1	20	CA	V5	100PSMH	120	FA	CY	-
Dockside 1 Fixture	20	Cross Arm	Vertical Type 5	100 Watt Pulse Start Metal Halide	120 Volts	Frosted Acrylic	Clay	-

Fixture Ordering Form:

1	2	3	4	5	6	7	8	9	9	9
Fixture	Size	Mounting	Optics	Lamp	Voltage	Lens	Color	Option	Option	Option

1. DK1 / / / / / / / / / / /

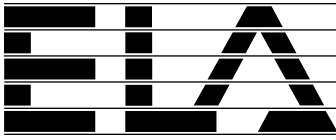

Specifications

Fixture Housing: One-piece sand-cast ballast housing with a spun aluminum shade. Housing shall be corrosion resistant cast aluminum alloy #A356. The housing shall be free of any foreign materials or cosmetic fillers.

Optics: The lamp shall be an open, type 5 output. Also available with house side shield option that is fully rotatable on site.

Electrical Module: All electrical components are UL and CSA recognized, mounted on a single plate, and factory prewired. An optional quick-disconnect plug for the ballast module is standard. *Reference pages 2 and 3 for lamp characteristics, ballast types, and voltage technical data.*

Lens: Globe shall be a 10" diameter sphere. Available in clear, frosted, and opal finishes. Globe is made of either acrylic, polycarbonate, or polyethylene (opal only). Globe is removable for easy re-lamping.

Finish/Color: Finish is super TGIC thermoset polyester powder coat paint. ELA offers RAL color matches along with our standard color selection. Custom and hand applied colors are available upon special request.


Certification: Fixtures shall be listed for outdoor, wet location. UL1598. IP rating 44.

CAUTION: Fixtures must be grounded in accordance with national, state, and/or local codes. Failure to do so may result in serious personal injury.

ELA RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Elevated Scale

Suggested Poles and Arms
for the Dockside 1 Fixture

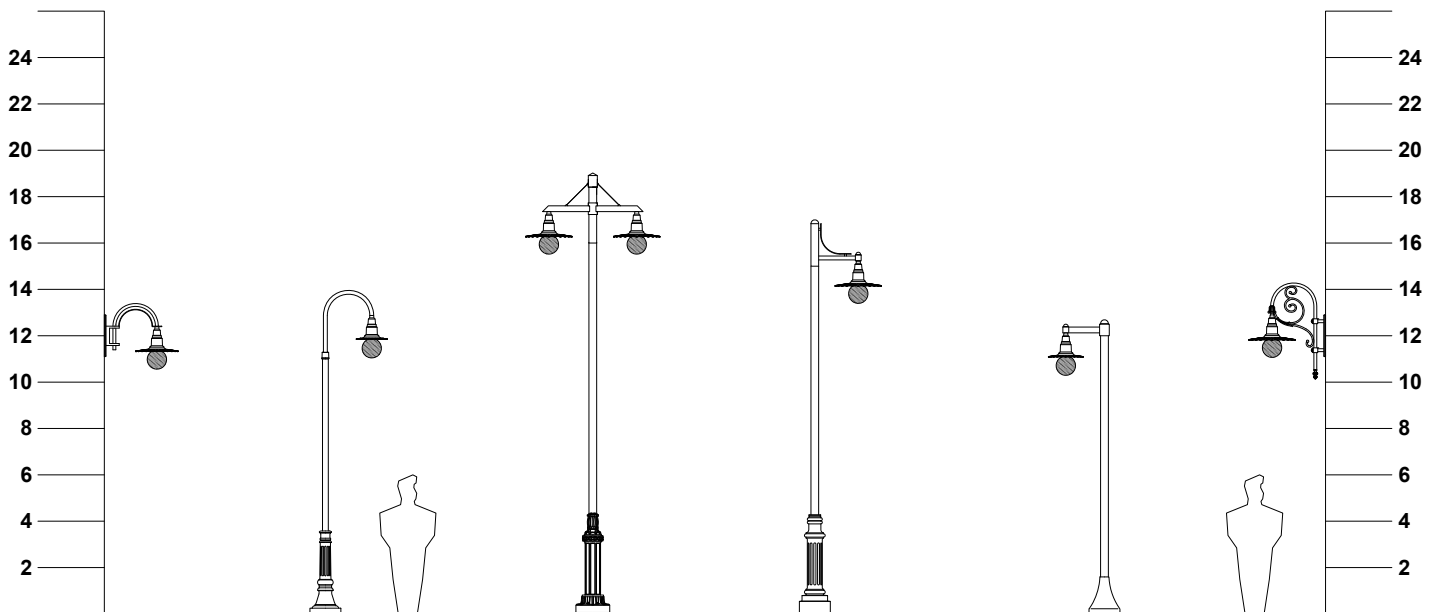

Fixture :	DK1/22/WB	DK1/16/CA	DK1/24/CA	DK1/24/CA	DK1/18/CA	DK1/24/WB
Arm :	BR14	CR17A	CR21B	CR111A	CR112A	BR16
Pole:		P3016A-12'	P3025D-16'	P3042B-14'	P4014B-12'	
Options :						

Note: Modifications to the fixture and additional pole heights are available.