

Project Name:	Type:
Notes:	Order Matrix Number:


TAZZA




The *Tazza* is a traditional fixture specifically designed for both residential and light commercial use. Inspired by the classic lighting designs from the Mediterranean region of the world, the *Tazza* achieves a timeless look with the advantage of high quality construction and a variety of placement options.

The *Tazza* is constructed with a combination of high quality aluminum castings that ensure strength and longevity, while the precise spun aluminum components help to create a lightweight and manageable fixture. The design of the *Tazza* allows designers the flexibility of the placement as a post top, cross arm, wall bracket, pendant, or pier mount piece.

The *Tazza* has been designed to allow for tool-less re-lamping and maintenance as well as quick and easy installation. These features allow direct access to both the lamp compartment and ballast housing. The addition of quick-disconnect wiring and a removable hood assembly makes for fast on-site maintenance without the need to remove the *Tazza* from its mounting location.

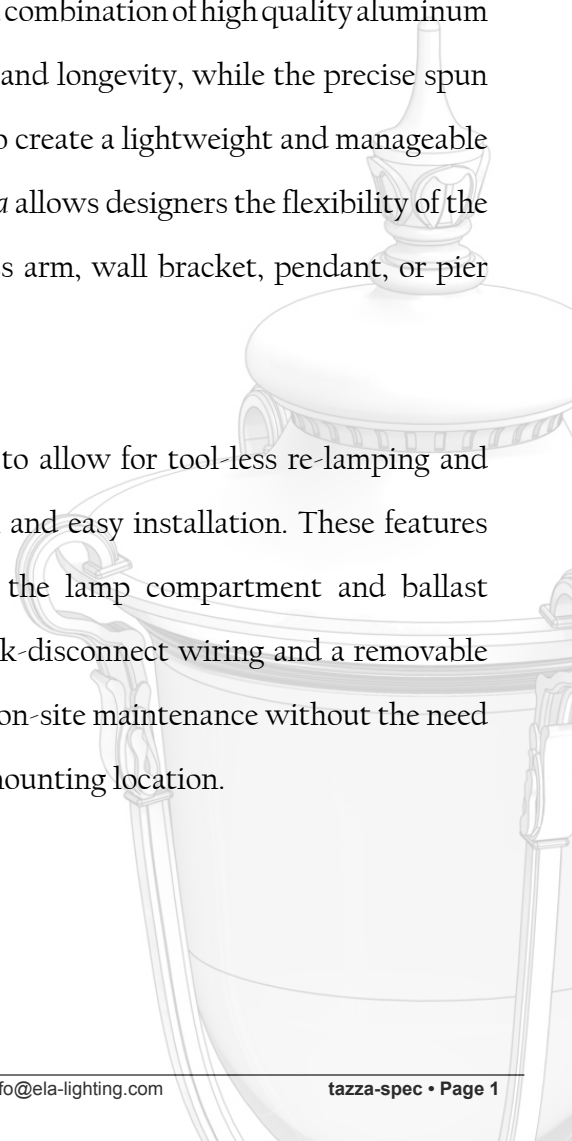


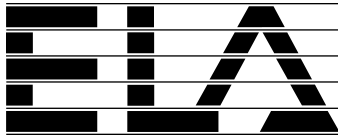

1	2	3	4	5	6	7	8	9
Fixture /	Size /	Mounting /	Optics /	Ballast /	Voltage /	Lens /	Color /	Option
TZA /	14 /	CP /	V5 /	70MH /	120 /	FG /	CY /	--

1. Fixture: TZA

2. Size



Matrix #:
Description:
Notes:
EPA:
Weight:

14
 Max Wattage 70W
 2.6
 42 lbs.

3. Mounting



Notes:
 1. Please consult factory for Poles, Wall Brackets, and other mounting options.

Matrix #:	CA	CP	PT	SP	WB
Description:	Cross Arm	Chain Pendant	Post Top	Stem Pendant	Wall Bracket

4. Optics

Vertical



Matrix #:
Description:

V3 *
 TYPE 3

V5
 TYPE 5


Notes:
 * Glass refractor required.

5. Ballast

Description:	Incandescent (Watts / Type) INC	LED (Watts / Type) 40LED * 75LED *	Pulse Start Metal Halide (Watts / Type) 50PSMH 70PSMH	Metal Halide (Watts / Type) T6 22MH T6 39MH 50MH 70MH T6 70MH	High Pressure Sodium (Watts / Type) 35HPS 50HPS 70HPS	Compact Fluorescent (Watts / Type) 13CFL 18CFL 26CFL 32CFL 42CFL
Matrix #:						

Notes:
 1. Electronic ballast available for 22, 39, 50, and 70 watt MH lamps.
 2. Other wattages and ballasts available. Consult factory.





* Requires a remote driver.

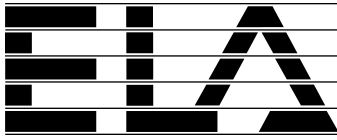


6. Voltage * Only these voltages are available with CFL and LED.	Matrix #:	120 *	208	240	277 *	347	480
	Description:	120V	208V	240V	277V	347V	480V

7. Lens				
	Matrix #:	CG Clear Glass	FG Frosted Glass	
Notes: 1. Glass is not tempered glass.				

8. Color	Powder Coat Finish				Hand-Applied Finish			
	Matrix #	Description	Matrix #	Description	Matrix #	Description	Matrix #	Description
Notes: Consult factory for custom colors.	AG	Augustine Green	MG	Malaga Green	CH	Cracked Hide	LV	Light Verde
	GY	Architectural Grey	MN	Midnight	OR	Old Iron	R	Rust
	CC	Charcoal	PW	Pewter	V	Verde		
	CY	Clay	SS	Sand Storm				
	DB	Dark Bronze	SB	Statuary Bronze				
	HR	Harbor Blue	VL	Village Green				
	HP	Hammered Pewter	W	White				

9. Options								
	TB	Terminal Block	PCB	Photocell Button	VR	Vertical Glass Refractor	HSS	House Side Shield
Notes: Photocell Options: Photocell is available in 120 thru 480 volts. Photocell receptacle only fits some cross arms. Consult factory. Specify when ordering.								

Fixture Ordering Example:




TZA/14/CP/V5/70MH/120/FG/CY

1	2	3	4	5	6	7	8	9
Fixture	Size	Mounting	Optics	Ballast	Voltage	Lens	Color	Option
TZA	14	CP	V5	70MH	120	FG	CY	-
Tazza Fixture	14	Chain Pendant	Vertical Type 5	70 Watt Metal Halide	120 Volts	Frosted Glass	Clay	-

Fixture Ordering Form:

1	2	3	4	5	6	7	8	9	9	9
Fixture	Size	Mounting	Optics	Lamp	Voltage	Lens	Color	Option	Option	Option

1. TZA / / / / / / / / / /

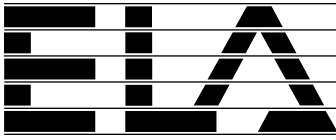

Specifications

Fixture Housing: One-piece sand-casting housing with a spun aluminum shade. The housing shall be free of any foreign materials or cosmetic fillers. For wall and arm mounts, consult factory for installation.

Optics: For vertical lamping, units shall utilize borosilicate glass refractors with open ends. Fully rotatable on site.

Electrical Module: All electrical components are UL and CSA recognized, mounted on a single plate and factory prewired. An optional quick-disconnect plug for the ballast module is available when specified. *Reference pages 2 and 3 for lamp characteristics, ballast types and voltage technical data.*

Lens: The lens will be clear or frosted glass, factory installed with gaskets.

Finish/Color: Finish is super TGIC thermoset polyester powder coat paint. ELA offers RAL color matches along with our standard color selection. Custom and hand applied colors are available upon special request.

Certification: Fixtures shall be listed for outdoor, wet location. UL1598. IP rating 65.

CAUTION: Fixtures must be grounded in accordance with national, state, and/or local codes. Failure to do so may result in serious personal injury.

ELA RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Elevated Scale

Suggested Poles and Arms
for the Tazza Fixture



Fixture :	TZA/14/WB	TZA/14/PT	TZA/14/CP	TZA/14/CA	TZA/14/CA	TZA/14/PT	TZA/14/WB
Arm :	BR118			CR130B	CR2A		BR116
Pole:		P3026A-8'		P3032D-12'	P3035B-11'	PM650	
Options :							

Note: Modifications to the fixture and additional pole heights are available.