

Project Name:	Type:
Notes:	Order Matrix Number:


## WASHINGTON 2



The *Washington 2* wall sconce is a half round shaped design, available in two sizes, which combines a clean look with excellent performance. Available with either a clear or frosted glass lens, the *Washington 2* is the perfect solution for lighting walls, walkways, stairways, and much more. Suitable for both indoor and outdoor applications, the *Washington 2* is UL Listed for wet locations.

Constructed of high grade die cast aluminum and finished with a durable powder-coated finish, the *Washington 2* has a full cut-off for Dark Skies requirements. Available in up to a maximum 400 watt Metal Halide or High Pressure Sodium, the *Washington 2* can also accommodate today's Low-Energy requirements with a 48 watt LED system or up to 42 watt CFL lamping, while still maintaining excellent light output.


The *Washington 2* offers clean contemporary styling, extraordinary durability, and excellent performance for any architectural structure.

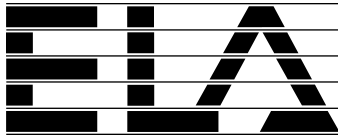

1	2	3	4	5	6	7	8	9
Fixture /	Size /	Mounting /	Optics /	Ballast /	Voltage /	Lens /	Color /	Option
<b>WA2 /</b>	<b>18 /</b>	<b>WB /</b>	<b>H5 /</b>	<b>48LED /</b>	<b>120 /</b>	<b>FG /</b>	<b>DB /</b>	<b>-</b>


**1. Fixture: WA2**

**2. Size**



<b>Matrix #:</b>	<b>18</b>	<b>27</b>
<b>Description:</b>		
<b>Notes:</b>	Max Wattage 150W	Max Wattage 400W
<b>EPA:</b>	--	--
<b>Weight:</b>	12 lbs.	18 lbs.

**3. Mounting**



<b>Matrix #:</b>	<b>WB</b>
<b>Description:</b>	Wall Bracket

**4. Optics**

**Horizontal**



**Matrix #:**  
**Description:**



**H3**  
**TYPE 3**




**H5**  
**TYPE 5**







**5. Ballast**

<b>Description:</b>	Pulse Start Metal Halide (Watts / Type)	Metal Halide (Watts / Type)	High Pressure Sodium (Watts / Type)	Compact Fluorescent (Watts / Type)	LED (Watts / Type)
<b>Matrix #:</b>	<b>50PSMH</b> <b>70PSMH</b> <b>100PSMH</b> <b>150PSMH</b> <b>200PSMH *</b> <b>250PSMH *</b> <b>320PSMH *</b> <b>350PSMH *</b> <b>400PSMH *</b>	<b>T6 39MH</b> <b>50MH</b> <b>70MH</b> <b>T6 70MH</b> <b>100MH</b> <b>T6 150MH</b> <b>150MH</b>	<b>50HPS</b> <b>70HPS</b> <b>100HPS</b> <b>150HPS</b> <b>200HPS *</b> <b>250HPS *</b> <b>400HPS *</b>	<b>13CFL</b> <b>18CFL</b> <b>26CFL</b> <b>32CFL</b> <b>42CFL</b>	<b>48LED **</b>


**Notes:**  
1. Electronic ballast available for 50, 70, 100 watt MH lamps.  
2. Other wattages and ballasts available. Consult factory.

\* Fits size 27 only.  
\*\* Fits size 18 and type 5 only.

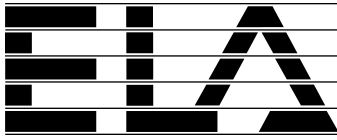
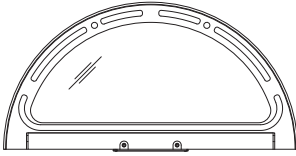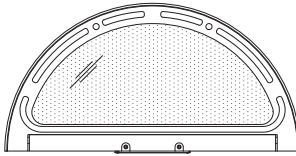
<p><b>6. Voltage</b> * Only these voltages are available for LED. Consult factory for other voltages.</p>	<table> <tr> <td><b>Matrix #:</b></td> <td><b>120 *</b></td> <td><b>208</b></td> <td><b>240</b></td> <td><b>277 *</b></td> <td><b>347</b></td> <td><b>480</b></td> </tr> <tr> <td><b>Description:</b></td> <td>120V</td> <td>208V</td> <td>240V</td> <td>277V</td> <td>347V</td> <td>480V</td> </tr> </table>	<b>Matrix #:</b>	<b>120 *</b>	<b>208</b>	<b>240</b>	<b>277 *</b>	<b>347</b>	<b>480</b>	<b>Description:</b>	120V	208V	240V	277V	347V	480V
<b>Matrix #:</b>	<b>120 *</b>	<b>208</b>	<b>240</b>	<b>277 *</b>	<b>347</b>	<b>480</b>									
<b>Description:</b>	120V	208V	240V	277V	347V	480V									
<p><b>7. Lens</b></p> <p><b>Notes:</b> Consult factory for custom lens options.</p>	<div style="display: flex; justify-content: space-around; align-items: center;">   </div> <p><b>Matrix #:</b>                      <b>CG</b> Clear Glass                      <b>FG</b> Frosted Glass <b>Description:</b></p>														
<p><b>8. Color</b></p> <p><b>Notes:</b> Consult factory for custom colors.</p>	<p><b>Powder Coat Finish</b></p> <table> <tr> <td><b>Matrix #</b></td> <td><b>Description</b></td> </tr> <tr> <td><b>DB</b></td> <td>Dark Bronze</td> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> </table>	<b>Matrix #</b>	<b>Description</b>	<b>DB</b>	Dark Bronze										
<b>Matrix #</b>	<b>Description</b>														
<b>DB</b>	Dark Bronze														
<p><b>9. Options</b></p> <p><b>Notes:</b> 1. BBU option is available for fluorescent lamp only. 2. Test button location shall have visibility for testing on site. Consult factory for placement location.</p> <p>* LED is not available in this option.</p>	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p><b>BBU</b> Battery Backup</p> </div> <div style="text-align: center;">  <p><b>TB</b> Terminal Block</p> </div> <div style="text-align: center;">  <p><b>PCB</b> Photocell Button</p> </div> <div style="text-align: center;">  <p><b>UDL *</b> Up &amp; Down Light Unit</p> </div> </div>														

**Fixture Ordering Example:**




WA2/18/WB/H5/48LED/120/FG/DB

1	2	3	4	5	6	7	8	9
Fixture /	Size /	Mounting /	Optics /	Ballast /	Voltage /	Lens /	Color /	Option
<b>WA2</b>	<b>18</b>	<b>WB</b>	<b>H5</b>	<b>48LED</b>	<b>120</b>	<b>FG</b>	<b>DB</b>	<b>-</b>
Washington 2 Fixture	18	Wall Bracket	Horizontal Type 5	48 Watt LED	120 Volts	Frosted Glass	Dark Bronze	-

**Fixture Ordering Form:**

1	2	3	4	5	6	7	8	9	9	9
Fixture /	Size /	Mounting /	Optics /	Lamp /	Voltage /	Lens /	Color /	Option /	Option /	Option
<b>1. WA2</b> /	/	/	/	/	/	/	/	/	/	/

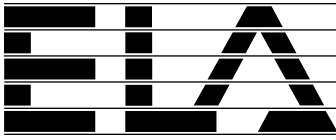

# Specifications

**Fixture Housing:** Two-piece die-cast. Housing shall be corrosion resistant die cast aluminum alloy #A380. The housing shall be free of any foreign materials or cosmetic fillers. For other mounting options, consult factory for installation.

**Optics:** Units have a sheet metal fabricated reflector and are rigidly mounted within a die-cast, low copper (<0.6% Cu) aluminum alloy enclosure.

**Electrical Module:** All electrical components are UL and CSA recognized, and factory prewired. LED diodes have a color temperature of 5100K and are rated at 90 lumens per diode. An optional quick-disconnect plug for the ballast module is available when specified.

*Reference pages 2 and 3 for lamp characteristics, ballast types, and voltage technical data.*

**Lens:** Glass lens shall be a heat treated and impact resistant tempered glass lens. All lenses to be factory installed with continuous sealant.

**Finish/Color:** Finish is super TGIC thermoset polyester powder coat paint. ELA offers RAL color matches along with our standard color selection. Custom and hand applied colors are available upon special request.


**Certification:** Fixtures shall be listed for outdoor, wet location. UL1598. IP rating 65.

**CAUTION:** Fixtures must be grounded in accordance with national, state, and/or local codes. Failure to do so may result in serious personal injury.

**ELA RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.**

# Elevated Scale

Suggested Mounting Height for the Washington 2 Fixture

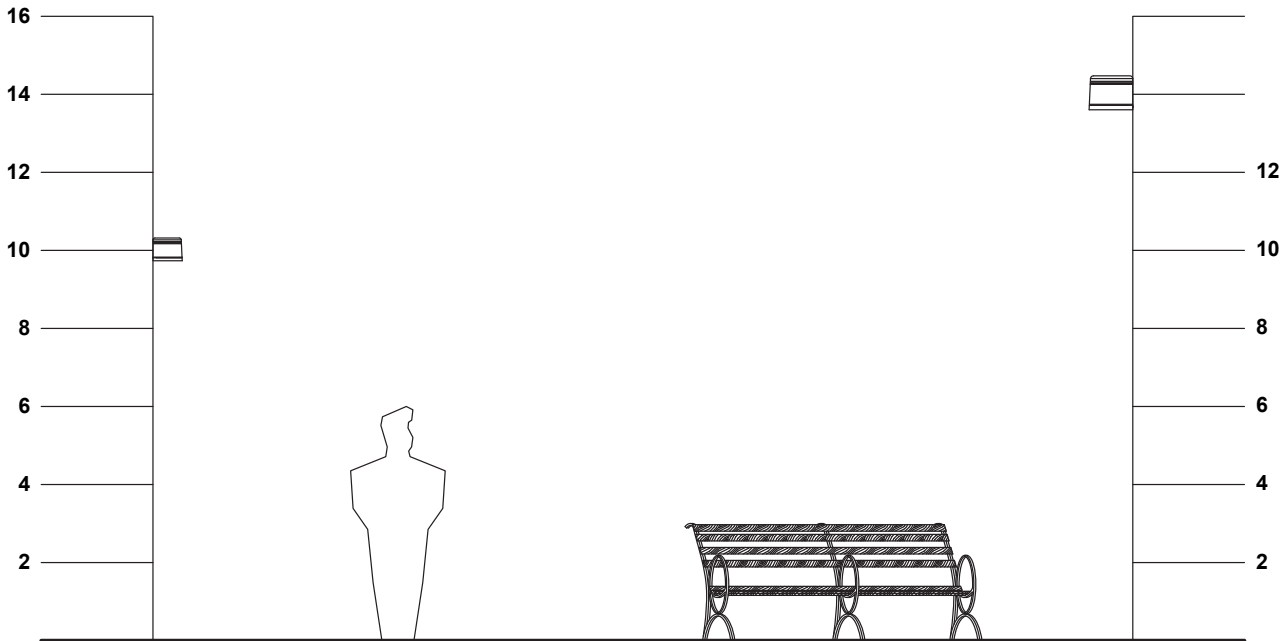

Fixture : WA2/18/WB

WA2/27/WB

Arm :

Pole:

Options :