

| | |
|---------------|----------------------|
| Project Name: | Type: |
| Notes: | Order Matrix Number: |


WASHINGTON 2



The *Washington 2* wall sconce is a half round shaped design, available in two sizes, which combines a clean look with excellent performance. Available with either a clear or frosted glass lens, the *Washington 2* is the perfect solution for lighting walls, walkways, stairways, and much more. Suitable for both indoor and outdoor applications, the *Washington 2* is UL Listed for wet locations.

Constructed of high grade die cast aluminum and finished with a durable powder-coated finish, the *Washington 2* has a full cut-off for Dark Skies requirements. Available in up to a maximum 400 watt Metal Halide or High Pressure Sodium, the *Washington 2* can also accommodate today's Low-Energy requirements with a 48 watt LED system or up to 42 watt CFL lamping, while still maintaining excellent light output.


The *Washington 2* offers clean contemporary styling, extraordinary durability, and excellent performance for any architectural structure.



| | | | | | | | | |
|--------------|-------------|-------------|-------------|----------------|--------------|-------------|-------------|----------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| Fixture / | Size / | Mounting / | Optics / | Ballast / | Voltage / | Lens / | Color / | Option |
| WA2 / | 18 / | WB / | H5 / | 48LED / | 120 / | FG / | DB / | - |


1. Fixture: WA2

2. Size



| | | |
|---------------------|------------------|------------------|
| Matrix #: | 18 | 27 |
| Description: | | |
| Notes: | Max Wattage 150W | Max Wattage 400W |
| EPA: | -- | -- |
| Weight: | 12 lbs. | 18 lbs. |

3. Mounting



| | |
|---------------------|--------------|
| Matrix #: | WB |
| Description: | Wall Bracket |

4. Optics

Horizontal



Matrix #:
Description:



H3
TYPE 3




H5
TYPE 5

5. Ballast

| | | | | | |
|---------------------|---|-----------------------------|-------------------------------------|------------------------------------|--------------------|
| Description: | Pulse Start Metal Halide (Watts / Type) | Metal Halide (Watts / Type) | High Pressure Sodium (Watts / Type) | Compact Fluorescent (Watts / Type) | LED (Watts / Type) |
| Matrix #: | 50PSMH | T6 39MH | 50HPS | 13CFL | 48LED ** |
| | 70PSMH | 50MH | 70HPS | 18CFL | |
| | 100PSMH | 70MH | 100HPS | 26CFL | |
| | 150PSMH | T6 70MH | 150HPS | 32CFL | |
| | 200PSMH * | 100MH | 200HPS * | 42CFL | |
| | 250PSMH * | T6 150MH | 250HPS * | | |
| | 320PSMH * | 150MH | 400HPS * | | |
| | 350PSMH * | | | | |
| | 400PSMH * | | | | |

Notes:
1. Electronic ballast available for 50, 70, 100 watt MH lamps.
2. Other wattages and ballasts available. Consult factory.

* Fits size 27 only.
** Fits size 18 and type 5 only.

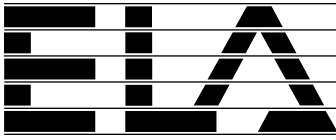

Specifications

Fixture Housing: Two-piece die-cast. Housing shall be corrosion resistant die cast aluminum alloy #A380. The housing shall be free of any foreign materials or cosmetic fillers. For other mounting options, consult factory for installation.

Optics: Units have a sheet metal fabricated reflector and are rigidly mounted within a die-cast, low copper (<0.6% Cu) aluminum alloy enclosure.

Electrical Module: All electrical components are UL and CSA recognized, and factory prewired. LED diodes have a color temperature of 5100K and are rated at 90 lumens per diode. An optional quick-disconnect plug for the ballast module is available when specified.

Reference pages 2 and 3 for lamp characteristics, ballast types, and voltage technical data.

Lens: Glass lens shall be a heat treated and impact resistant tempered glass lens. All lenses to be factory installed with continuous sealant.

Finish/Color: Finish is super TGIC thermoset polyester powder coat paint. ELA offers RAL color matches along with our standard color selection. Custom and hand applied colors are available upon special request.


Certification: Fixtures shall be listed for outdoor, wet location. UL1598. IP rating 65.

CAUTION: Fixtures must be grounded in accordance with national, state, and/or local codes. Failure to do so may result in serious personal injury.

ELA RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Elevated Scale

Suggested Mounting Height for the Washington 2 Fixture

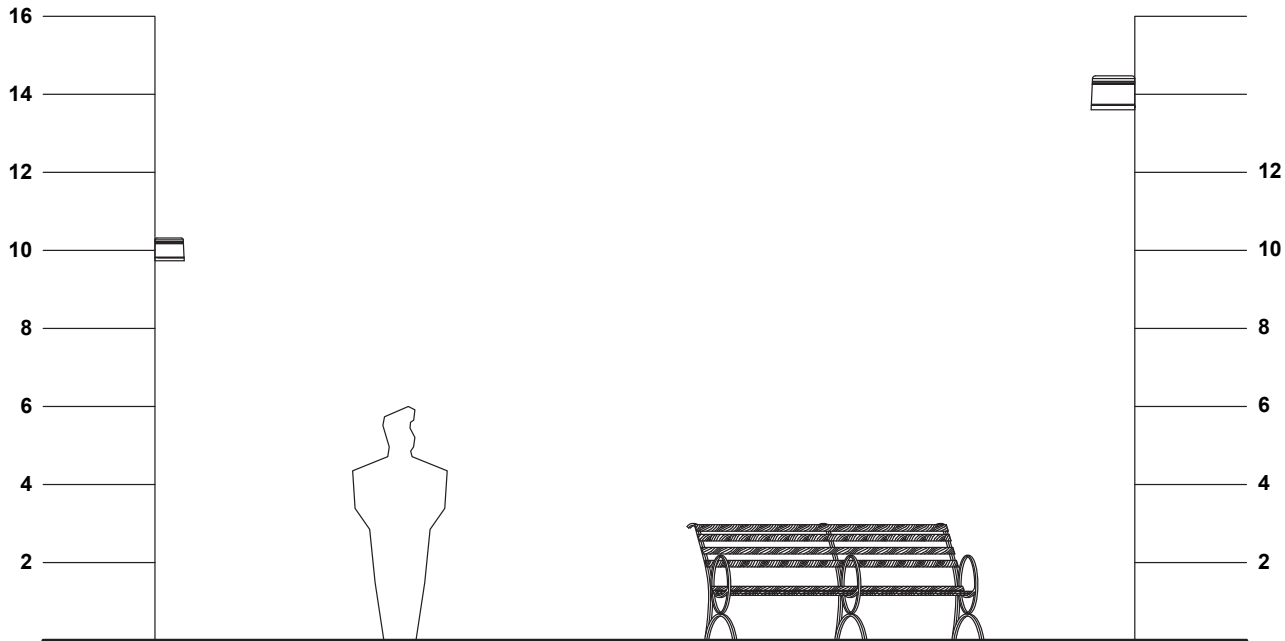

Fixture : WA2/18/WB

WA2/27/WB

Arm :

Pole:

Options :