Bay

The Bay is a classic, traditional downlight; while being fully operational with today's high performance and low energy lighting standards. Available in three sizes, the Bay produces maximum downlight with full cut-off optics and can be provided with up to 150 watts in HID. Suitable to be cross arm, pole, pendant or wall mounted; the Bay is the perfect solution to replicate barn lights; or light streets, historical sites, government buildings, schools and universities, shopping malls, parking lots, site and walkway lighting, and much more.

Fixture is "Buy America Act" Compliant Proudly Made in the U.S.A.

Project Name:

Type:

Bay - BAY

HID Ordering Matrix

Environmental Lighting for Architecture, Inc.

1	2	3	4	5	6	7	8	9
BAY								

1. Fixture:

Matrix #:	Description:
BAY	Bay Fixture

2. Size:

Matrix #:	Weight:	EPA:
18	23 lbs.	0.8
20	24 lbs.	0.9
22	25 lbs.	1.0

3. Mounting:

Matrix #:	Description:
CA*	Cross Arm
WB*	Wall Bracket
SP	Stem Pendant
CP	Chain Pendant

*Specify which pole is to be used. See ELA website for choices.

4. Distributions:

Matrix #:	Description:
H2	Type 2 - Horizontal
H3	Type 3 - Horizontal
H4	Type 4 - Horizontal
H5	Type 5 - Horizontal

BAY / 18
Horizontal. Max: 150W



BAY / 20
Horizontal. Max: 150W



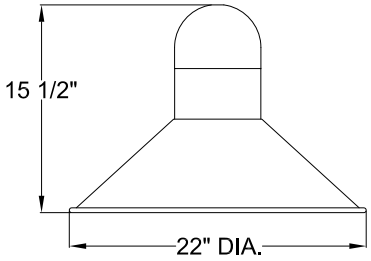

BAY / 22
Horizontal. Max: 150W

5. Lamping:

1. Electronic ballast available for 50, 70 watt MH lamps.
2. Other wattages and ballasts available. Consult factory.

Description:	Matrix #:
Pulse Start Metal Halide (Watts/Type)	**50PSMH** **70PSMH** **100PSMH** **150PSMH**
Metal Halide (Watts/Type)	**50MH** **70MH** **T6 70MH** **100MH** **T6 150MH**
High Pressure Sodium (Watts/Type)	**50HPS** **70HPS** **100HPS** **150HPS**
Incandescent	**INC***

*Note: Incandescent socket supplied will be E26 Medium-Base (suitable for lamping by others), unless otherwise specified.

6. Voltage:

Matrix #:	Description:
120	120VAC
208	208VAC
240	240VAC
277	277VAC
347	347VAC
480	480VAC

7. Lens:

Matrix #:	Description:
CG	Clear Glass Lens (Tempered)
FG	Frosted Glass Lens (Tempered)
OG	Opal Glass

*50W max wattage

8. Finish:

(Standard Powder Coat)

Matrix #:	Description:
AG	Augustine Green
CC	Charcoal
DB	Dark Bronze
GY	Architectural Grey
MG	Malaga Green
MN	Black - Midnight
PW	Pewter
SB	Statuary Bronze
VL	Village Green
WH	White

Note: Custom colors available upon request.

9. Options:

Matrix #:	Description:
PCB	Photocell Button
TB	Terminal Block
PCR3*	3 Pin Photo Control Receptacle
PCR5*	5 Pin Photo Control Receptacle
PCF7*	7 Pin Photo Control Receptacle
HSS	House Side Shield

* See ELA for mounting options.

ELA Warranty Info: Environmental Lighting for Architecture, Inc. (ELA) offers a Five (5) Year Warranty on all products exclusively manufactured by ELA. Furthermore, ELA offers a Five (5) Year Warranty on all LED and LED components; and guarantees that no fewer than 90% of the diodes in each fixture will still be operating during this time. Please contact ELA for the details of each warranty.