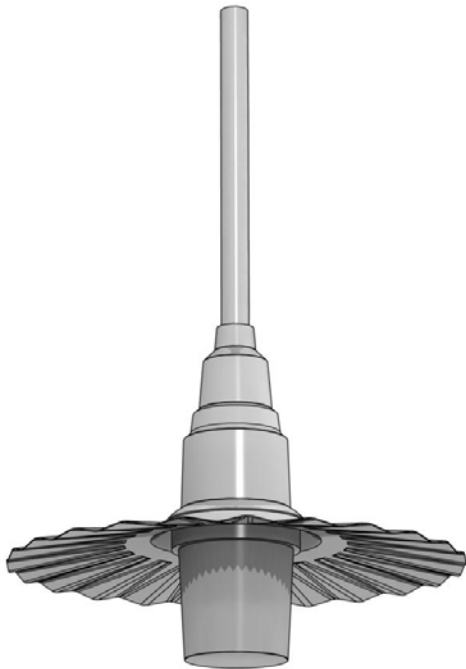


Project Name:	Type:
Notes:	Order Matrix Number:

Environmental Lighting for Architecture, Inc.


## DOCKSIDE 3




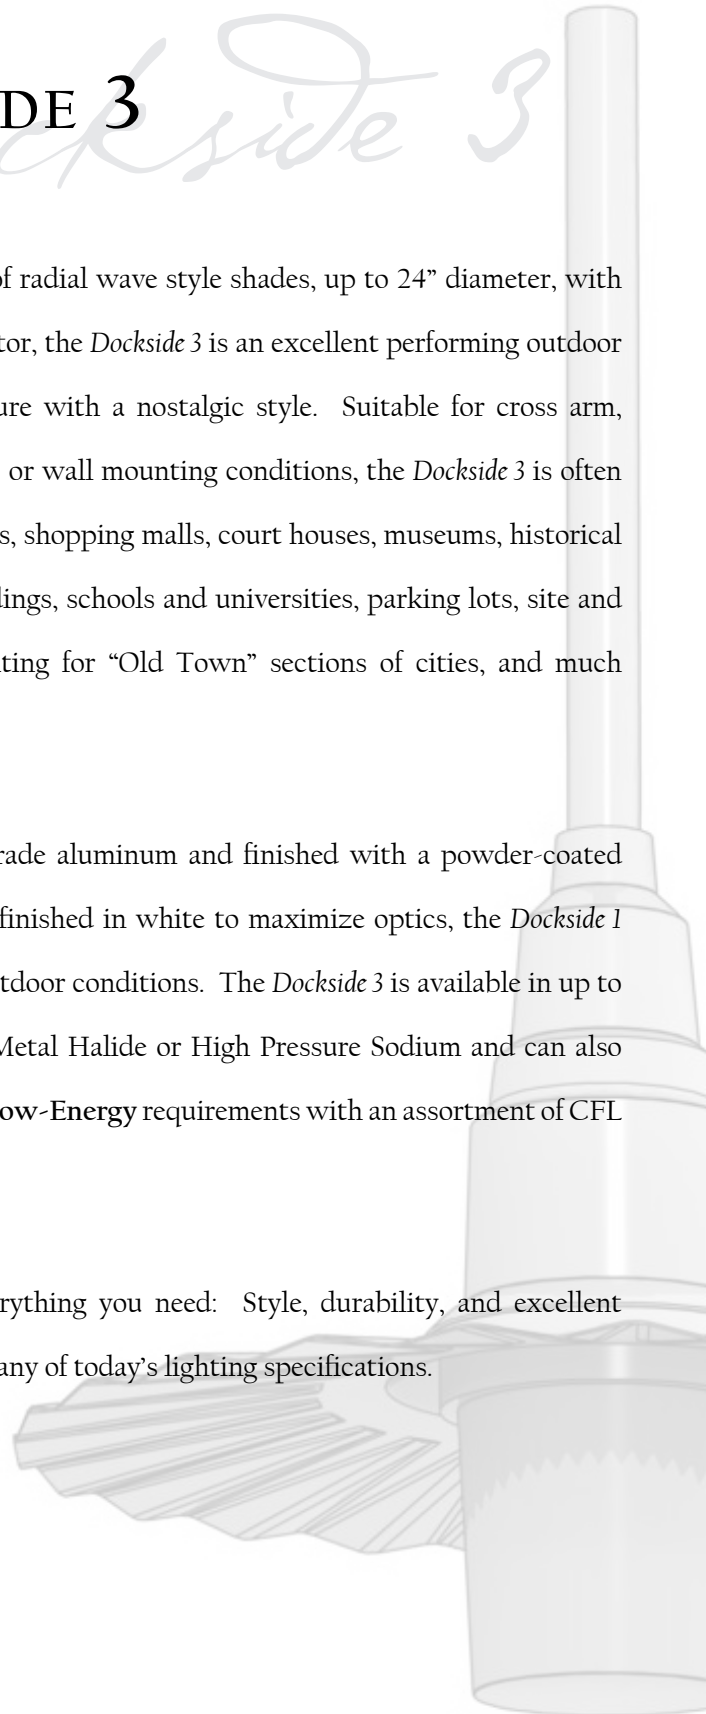Available in five sizes of radial wave style shades, up to 24" diameter, with a prismatic glass refractor, the *Dockside 3* is an excellent performing outdoor pendant mounted fixture with a nostalgic style. Suitable for cross arm, ceiling (chain or stem), or wall mounting conditions, the *Dockside 3* is often specified for restaurants, shopping malls, court houses, museums, historical sites, government buildings, schools and universities, parking lots, site and walkway lighting, lighting for "Old Town" sections of cities, and much more.

Constructed of high grade aluminum and finished with a powder-coated finish, with the inside finished in white to maximize optics, the *Dockside 3* is built to endure all outdoor conditions. The *Dockside 3* is available in up to a maximum 150 watt Metal Halide or High Pressure Sodium and can also accommodate today's Low-Energy requirements with an assortment of CFL lamps up to 57 watts.

The *Dockside 3* has everything you need: Style, durability, and excellent performance to meet many of today's lighting specifications.






Environmental Lighting for Architecture, Inc.

## Ordering Matrix Dockside 3 - DK3

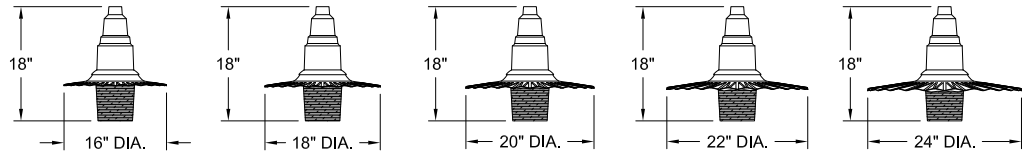1 Fixture	/	2 Size	/	3 Mounting	/	4 Optics	/	5 Ballast	/	6 Voltage	/	7 Lens	/	8 Color	/	9 Option
DK3	/	20	/	CA	/	V5	/	100PSMH	/	120	/	CG	/	CY	/	--

### 1. Fixture: DK3


#### 2. Size



Matrix #:	16	18	20	22	24
Description:					
Notes:	Max Wattage 150W	Max Wattage 150W	Max Wattage 150W	Max Wattage 150W	Max Wattage 150W
EPA:	1.3	1.4	1.5	1.6	1.7
Weight:	21 lbs.	22 lbs.	23 lbs.	24 lbs.	24 lbs.

**Notes:**  
1. Standard size for all globes is 10" diameter.

#### 3. Mounting

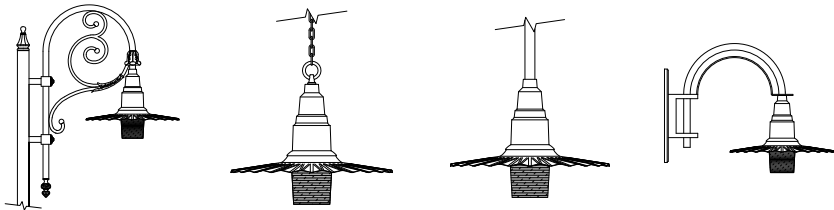


Matrix #:	CA	CP	SP	WB
Description:	Cross Arm	Chain Pendant	Stem Pendant	Wall Bracket

**Notes:**  
1. Please consult factory for other mounting options.

#### 4. Optics

##### Vertical



**Matrix #:**  
Description:



**V3**  
TYPE 3
















**V5**  
TYPE 5


#### 5. Ballast

Description:	Incandescent	Pulse Start Metal Halide	Metal Halide	High Pressure Sodium	Compact Fluorescent
(Watts / Type)	(Watts / Type)	(Watts / Type)	(Watts / Type)	(Watts / Type)	(Watts / Type)
Matrix #:	INC	50PSMH	50MH	50HPS	13CFL
		70PSMH	70MH	70HPS	18CFL
		100PSMH	T6 70MH	100HPS	26CFL
		150PSMH	100MH	150HPS	32CFL
			T6 150MH		42CFL
			150MH		57CFL

**Notes:**  
1. Electronic ballast available for 50, 70, and 100 watt MH lamps.  
2. Other wattages available. Consult factory.

<div>6. Voltage</div>	<table><tr><td>Matrix #:</td><td>120</td><td>208</td><td>240</td><td>277</td><td>347</td><td>480</td></tr><tr><td>Description:</td><td>120V</td><td>208V</td><td>240V</td><td>277V</td><td>347V</td><td>480V</td></tr></table>	Matrix #:	120	208	240	277	347	480	Description:	120V	208V	240V	277V	347V	480V																						
Matrix #:	120	208	240	277	347	480																															
Description:	120V	208V	240V	277V	347V	480V																															
<div>7. Lens</div> <div>Notes: Consult factory for custom lens options.</div>	<div></div> <div>Matrix #: Description:</div> <div>CG Clear Glass Refractor</div>																																				
<div>8. Color</div> <div>Notes: Consult factory for custom colors.</div>	<table><tr><th colspan="2">Powder Coat Finish</th><th colspan="2">Hand-Applied Finish</th></tr><tr><th>Matrix #</th><th>Description</th><th>Matrix #</th><th>Description</th></tr><tr><td>AG</td><td>Augustine Green</td><td>MG</td><td>Malaga Green</td></tr><tr><td>GY</td><td>Architectural Grey</td><td>MN</td><td>Midnight</td></tr><tr><td>CC</td><td>Charcoal</td><td>PW</td><td>Pewter</td></tr><tr><td>CY</td><td>Clay</td><td>SS</td><td>Sand Storm</td></tr><tr><td>DB</td><td>Dark Bronze</td><td>SB</td><td>Statuary Bronze</td></tr><tr><td>HR</td><td>Harbor Blue</td><td>VL</td><td>Village Green</td></tr><tr><td>HP</td><td>Hammered Pewter</td><td>W</td><td>White</td></tr></table>	Powder Coat Finish		Hand-Applied Finish		Matrix #	Description	Matrix #	Description	AG	Augustine Green	MG	Malaga Green	GY	Architectural Grey	MN	Midnight	CC	Charcoal	PW	Pewter	CY	Clay	SS	Sand Storm	DB	Dark Bronze	SB	Statuary Bronze	HR	Harbor Blue	VL	Village Green	HP	Hammered Pewter	W	White
Powder Coat Finish		Hand-Applied Finish																																			
Matrix #	Description	Matrix #	Description																																		
AG	Augustine Green	MG	Malaga Green																																		
GY	Architectural Grey	MN	Midnight																																		
CC	Charcoal	PW	Pewter																																		
CY	Clay	SS	Sand Storm																																		
DB	Dark Bronze	SB	Statuary Bronze																																		
HR	Harbor Blue	VL	Village Green																																		
HP	Hammered Pewter	W	White																																		
<div>9. Options</div> <div>Notes: 1. BBU option is available for fluorescent lamp only. 2. Test button location shall have visibility for testing on site. Consult factory for placement location.</div> <div>Photocell Options: Photocell is available in 120 thru 480 volts. Consult factory. Specify when ordering.</div>	<table><tr><td><div></div><div>BBU Battery Backup</div></td><td><div></div><div>TB Terminal Block</div></td><td><div></div><div>PCB Photocell Button</div></td><td><div></div><div>HSS House Side Shield</div></td></tr></table>	<div></div> <div>BBU Battery Backup</div>	<div></div> <div>TB Terminal Block</div>	<div></div> <div>PCB Photocell Button</div>	<div></div> <div>HSS House Side Shield</div>																																
<div></div> <div>BBU Battery Backup</div>	<div></div> <div>TB Terminal Block</div>	<div></div> <div>PCB Photocell Button</div>	<div></div> <div>HSS House Side Shield</div>																																		

### Fixture Ordering Example:




DK3/20/CA/V5/100PSMH/120/CG/CY

1	2	3	4	5	6	7	8	9								
Fixture	/	Size	/	Mounting	/	Optics	/	Ballast	/	Voltage	/	Lens	/	Color	/	Option
<b>DK3</b> Dockside 3 Fixture	/	<b>20</b> 20	/	<b>CA</b> Cross Arm	/	<b>V5</b> Vertical Type 5	/	<b>100PSMH</b> 100 Watt Pulse Start Metal Halide	/	<b>120</b> 120 Volts	/	<b>CG</b> Clear Glass	/	<b>CY</b> Clay	/	<b>-</b> -

### Fixture Ordering Form:

1	2	3	4	5	6	7	8	9	9	9
Fixture	Size	Mounting	Optics	Lamp	Voltage	Lens	Color	Option	Option	Option
1	2	3	4	5	6	7	8	9	9	9

1. DK3 / / / / / / / / / /



## Specifications

**Fixture Housing:** One-piece sand-cast ballast housing with a spun aluminum shade. Housing shall be corrosion resistant cast aluminum alloy #A356. The housing shall be free of any foreign materials or cosmetic fillers.

**Optics:** Unit shall utilize borosilicate prismatic glass refractor. Fully rotatable on site.

**Electrical Module:** All electrical components are UL and CSA recognized, mounted on a single plate, and factory prewired. An optional quick-disconnect plug for the ballast module is standard. *Reference pages 2 and 3 for lamp characteristics, ballast types, and voltage technical data.*

**Lens:** Lens shall be a clear borosilicate prismatic glass refractor. Removable for re-lamping.

**Finish/Color:** Finish is super TGIC thermoset polyester powder coat paint. ELA offers RAL color matches along with our standard color selection. Custom and hand applied colors are available upon special request.

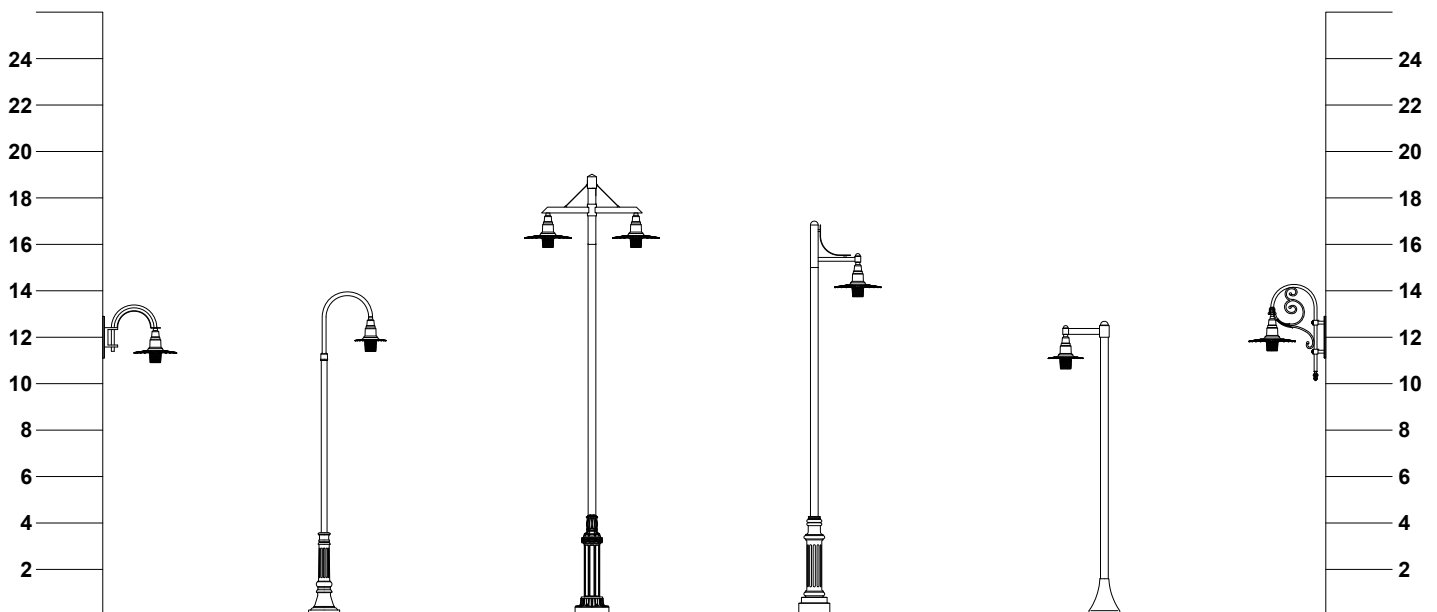
**Certification:** Fixtures shall be listed for outdoor, wet location. UL1598. IP rating 44.

**CAUTION:** Fixtures must be grounded in accordance with national, state, and/or local codes. Failure to do so may result in serious personal injury.

**ELA RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.**

## Elevated Scale

Suggested Poles and Arms  
for the Dockside 3 Fixture



Fixture :	DK3/22/WB	DK3/16/CA	DK3/24/CA	DK3/24/CA	DK3/18/CA	DK3/24/WB
Arm :	BR14	CR17A	CR21B	CR111A	CR112A	BR16
Pole:		P3016A-12'	P3025D-16'	P3042B-14'	P4014B-12'	
Options :						

Note: Modifications to the fixture and additional pole heights are available.