




Project Name:
Type:

Environmental Lighting for Architecture, Inc.

Pantheon - PAN LED Ordering Matrix

Pantheon

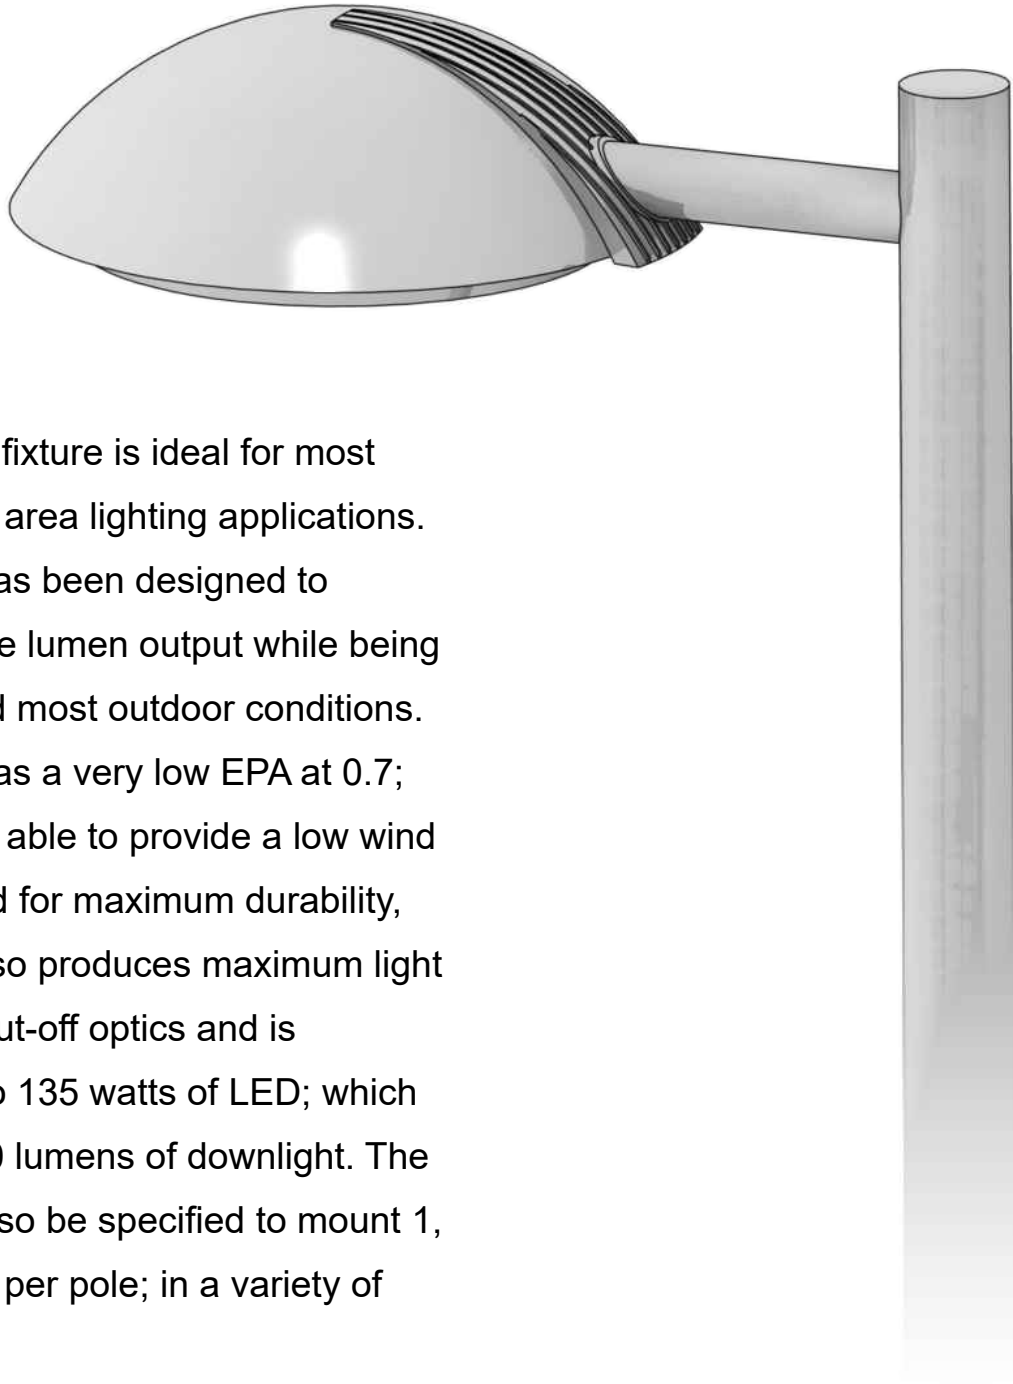

The Pantheon fixture is ideal for most outdoor site and area lighting applications. The Pantheon has been designed to provide maximize lumen output while being able to withstand most outdoor conditions. The Pantheon has a very low EPA at 0.7; and therefore, is able to provide a low wind rating. Designed for maximum durability, the Pantheon also produces maximum light output with full cut-off optics and is available in up to 135 watts of LED; which produces 12,960 lumens of downlight. The Pantheon can also be specified to mount 1, 2, 3 or 4 fixtures per pole; in a variety of patterns.



Fixture is "Buy America Act" Compliant Proudly Made in the U.S.A.



Project Name:
Type:

Pantheon - PAN

LED Ordering Matrix

Environmental Lighting for Architecture, Inc.



1	2	3	4	5	6	7	8	9	10
PAN									

1. Fixture: Matrix #: **PAN** Description: Pantheon Fixture

2. Size: Matrix #: **24** Weight: 45 lbs. EPA: 0.7

3. Mounting: Matrix #: **CR*** Description: Cross Arm
BR* Wall Bracket

Note: The Pantheon offers a mounting sleeve to receive a 2"IP (2 3/8" Dia.) standard roadway arm. Other mounting combinations with ELA products or products "By Others" may require a specialized mounting adapter. Please contact ELA factory for options.

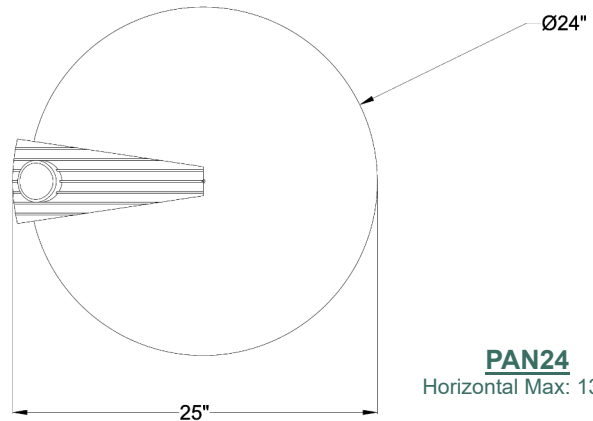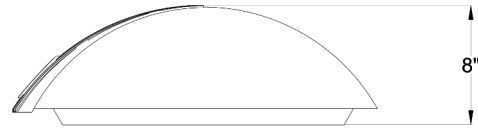

PAN24
Horizontal Max: 135W

5. Lamping:	Matrix #:	Description:	Diodes	Lumens*	Wattage*	Efficacy	LED Drive (mA)	Standard Dimming Type**
	35LED	LED Board	24	3360	35	96	292	1-10VDC, Triac, Forward Phase
	69LED	LED Board	56	6624	69	96	575	1-10VDC, Triac, Forward Phase
	101LED	LED Board	100	9696	101	96	842	1-10VDC, Triac, Forward Phase
	135LED	LED Board	100	12960	135	96	1125	1-10VDC, Triac, Forward Phase

*Other wattages & lumens available upon request.

**Other dimming types available upon request.

6. Color Temps (k):	Matrix #:	Description:
	AM*	Amber Color Temp
	27	2700k Color Temp
	30	3000k Color Temp
	40	4000k Color Temp
	50	5000k Color Temp

Note: Other color temperatures & RGB's available upon request.

7. Voltage:	Matrix #:	Description:
	120	120VAC
	208	208VAC
	240	240VAC
	277	277VAC
	347*	347VAC
	480*	480VAC

*Contact ELA for details.

8. Lens:	Matrix #:	Description:
	CG	Clear Tempered Glass
	FG	Frosted Tempered Glass

9. Finish:	Matrix #:	Description:
(Standard Powder Coat)	AG	Augustine Green
	CC	Charcoal
	DB	Dark Bronze
	GY	Architectural Grey
	MG	Malaga Green
	MN	Black - Midnight
	PW	Pewter
	SB	Statuary Bronze
	VL	Village Green
	WH	White

Note: Custom colors available upon request.

10. Options:	Matrix #:	Description:
	BBU	Battery Backup
	PCB	Photocell Button
	TB	Terminal Block
	PCR3*	3 Pin Photo Control Receptacle
	PCR5*	5 Pin Photo Control Receptacle
	PCF7*	7 Pin Photo Control Receptacle
	HSS	House Side Shield

1. BBU test button location shall have visibility for testing on site. Consult factory for placement location.

2. BBU LED lumen output reduced in BBU mode.

3. ELA Can integrate client specified WiFi /remote control components upon request.

* See ELA for mounting options.

ELA Warranty Info:

Environmental Lighting for Architecture, Inc. (ELA) offers a Five (5) Year Warranty on all products exclusively manufactured by ELA. Furthermore, ELA offers a Five (5) Year Warranty on all LED and LED components; and guarantees that no fewer than 90% of the diodes in each fixture will still be operating during this time. Please contact ELA for the details of each warranty.