



Project Name:

Type:

GARAGE LIGHT - **GR18**

Ordering Matrix

Environmental Lighting for Architecture, Inc.

1	2	3	4	5	6	7
GR18	/		/	HV3	/	

1. Fixture

Matrix #: **GR18**
Description: 18" Garage Light

Features:


Listing

UL and cUL listed for wet locations

Housing

Solid construction die-cast and stamped aluminum housing


Precisely engineered light guide for optimal light control and an internal sensor option to deliver exceptional visual comfort and outstanding energy efficiency.

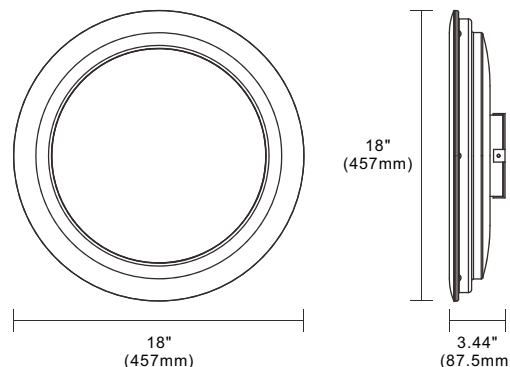

2. Mounting

Matrix #: **SF**
Description: Surface Mount
SP12 Stem pendant mount - 12" stem

Innovative quick-mount system. surface mounts to a square or octagonal 4" surface or recessed j-box. Optional pendant-mount installation available.

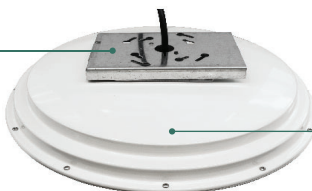

The five-stage chromate-conversion powder coating process ensures long-lasting durability and superior resistance to harsh environmental elements.



Stem Pendant Mount

3. WATTAGE

Matrix #: **30/50/68**
Description: 30watt, 50watt & 68watt
*30 watt default set at factory.

Matrix #: **65/85/108**
Description: 65watt, 85watt & 108watt
*65 watt default set at factory.



Smart controller for field adjustable wattage.

Field adjustable wattage

4. VOLTAGE

Matrix #: **HV3**
Description: 120-347VAC

5. COLOR TEMP.

Matrix #: **30K** 3000k
40K 4000k
50K 5000k

6. OPTIONS

Matrix #: **BBU**
Description: Emergency Battery Backup (8W)



OC Occupancy Sensor (multi-level dimming occupancy sensing provide maximum energy savings)
PC Photocell
SP Surge Protector (10k)

Multiple Options May Be Chosen

7. FINISH

Matrix #: **DB** Dark Bronze
WH White