


Project Name:
Type:

Environmental Lighting for Architecture, Inc.


Courtyard - CRT LED Ordering Matrix

Courtyard

The Courtyard has been a staple in ELA's line of decorative site lighting for many years. Available with an 18" globe in an assortment of materials and diffusers, this contemporary design will fulfill the design requirements for many of today's lighting applications. Suitable for pole, cross arm, or wall mounting conditions, the Courtyard is the perfect specification for many shopping malls, parking lots, walkway lighting, schools, libraries, theaters, high-end residential applications and, yes, Courtyards. Available with a maximum 45 watts of LED power, the Courtyard offers unique contemporary styling, extraordinary durability, and low-energy options for many types of projects.

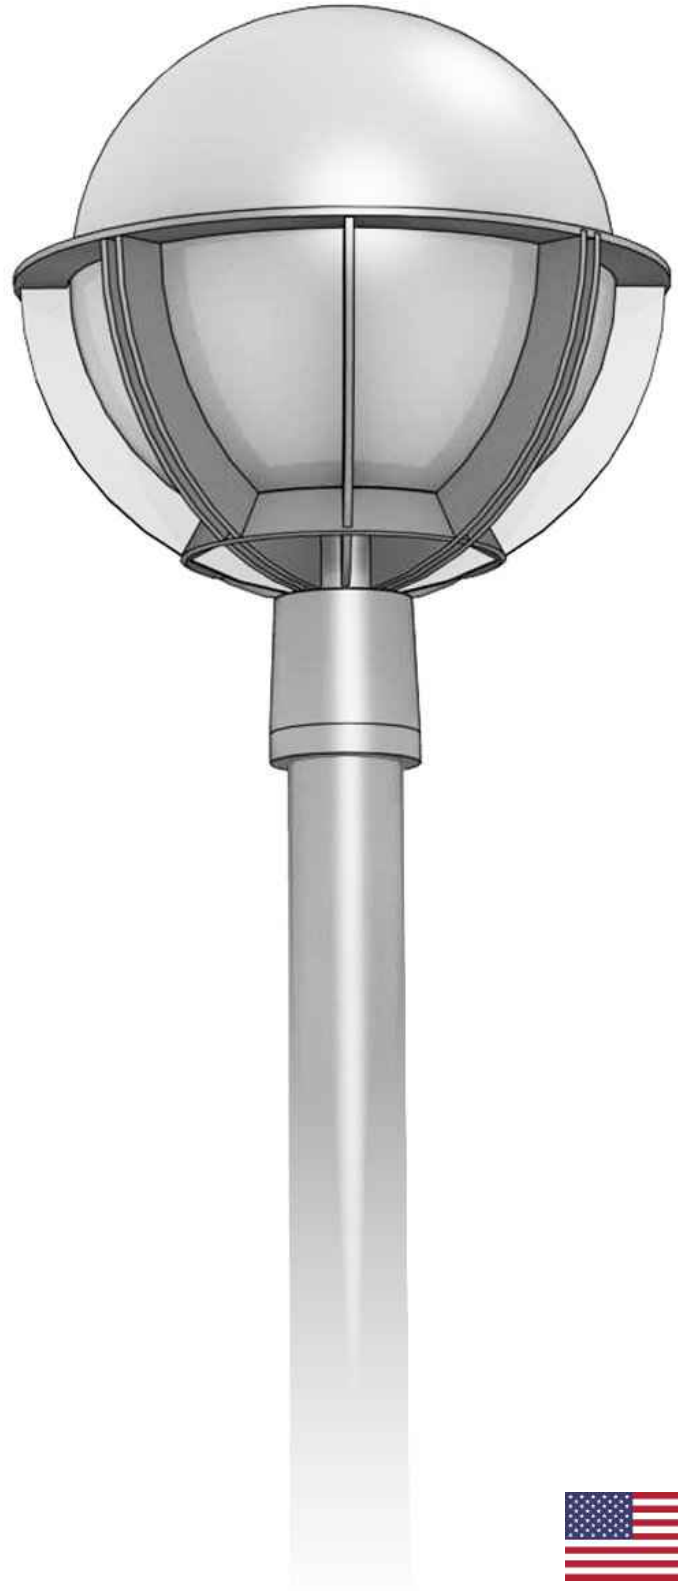

Fixture is "Buy America Act" Compliant Proudly Made in the U.S.A.



Project Name:
Type:

Courtyard - CRT

LED Ordering Matrix

Environmental Lighting for Architecture, Inc.

1	2	3	4	5	6	7	8	9
CRT								


1. Fixture: Matrix #: Description:
CRT Courtyard Fixture

2. Size: Matrix #: Weight: EPA:
14 20 1.5

3. Mounting: Matrix #: Description:
CR* Cross Arm
PT* Post Top
BR* Wall Bracket
CP Chain Pendant
SP Stem Pendant
PM* Pier Mount

*Specify which Cross Arm, Pole, or Wall Bracket is to be used. See ELA website for choices.

4. Distribution: Matrix #: Description:
V3 Type 3 - Vertical
V5 Type 5 - Vertical

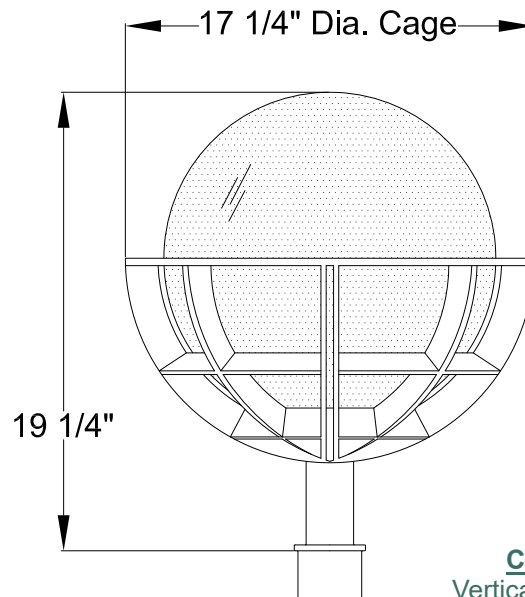

CRT / 14
Vertical Max: 45W

5. Lamping:	<u>Matrix #:</u>	<u>Description:</u>	<u>Diodes</u>	<u>Lumens*</u>	<u>Wattage*</u>	<u>Efficacy</u>	<u>LED Drive (mA)</u>	<u>Standard Dimming Type**</u>
	18LED	LED Corn Cob	56	1980	18	110	150	Line Voltage On-Board Transformer
	27LED	LED Corn Cob	81	2970	27	110	225	Line Voltage On-Board Transformer
	36LED	LED Corn Cob	108	3960	36	110	300	Line Voltage On-Board Transformer
	45LED	LED Corn Cob	135	4950	45	110	375	Line Voltage On-Board Transformer

*Other wattages & lumens available upon request.

**Other dimming types available upon request.

6. Color Temps (k): Matrix #: Description:
AM* Amber Color Temp
27 2700k Color Temp
30 3000k Color Temp
40 4000k Color Temp
50 5000k Color Temp

Note: Other color temperatures & RGB's available upon request.

*Amber not available in corn cobs.

7. Voltage: Matrix #: Description:
120 120VAC
208 208VAC
240 240VAC
277 277VAC
347* 347VAC
480* 480VAC

*Contact ELA for details.

8. Lens: Matrix #: Description:
CA Clear Acrylic Globe
FA Frosted Acrylic Globe
OA Opal Acrylic Globe

9. Finish: Matrix #: Description:
(Standard Powder Coat)
AG Augustine Green
CC Charcoal
DB Dark Bronze
GY Architectural Grey
MG Malaga Green
MN Black - Midnight
PW Pewter
SB Statuary Bronze
VL Village Green
WH White

Note: Custom colors available upon request.

10. Options: Matrix #: Description:
PCB Photocell Button
ST Solid Top
PCR3* 3 Pin Photo Control Receptacle
PCR5* 5 Pin Photo Control Receptacle
PCF7* 7 Pin Photo Control Receptacle
HSS House Side Shield

1. BBU LED lumen output reduced in BBU mode.

2. ELA Can integrate client specified wifi /remote control components upon request.

* See ELA for mounting options.

ELA Warranty Info: Environmental Lighting for Architecture, Inc. (ELA) offers a Five (5) Year Warranty on all products exclusively manufactured by ELA. Furthermore, ELA offers a Five (5) Year Warranty on all LED and LED components; and guarantees that no fewer than 90% of the diodes in each fixture will still be operating during this time. Please contact ELA for the details of each warranty.