



Project Name:
Type:

## Bollard - BOL5352


### Ordering Matrix

Environmental Lighting for Architecture, Inc.

1	2	3	4	5	6	7	8	9	10
BOL5352									

# BOL5352

The BOL5352 is a round concrete bollard with our Union fixture mounted on the top, and can be specified with or without a light source. Other fixtures ELA can be used instead of the Union. Consult factory for options. As a lighted bollard the BOL5352 is available with up to 15 watts of LED, which generates 1306 lumens, and is available in Type V or Type III distributions. Other light sources and heights are also available. The BOL5352 is available with a variety of lens options and is built to endure almost all weather conditions. The BOL5352 is ideal for sidewalks, walkways at various sites, outdoor shopping malls, parks, schools and universities, government buildings, and much more.

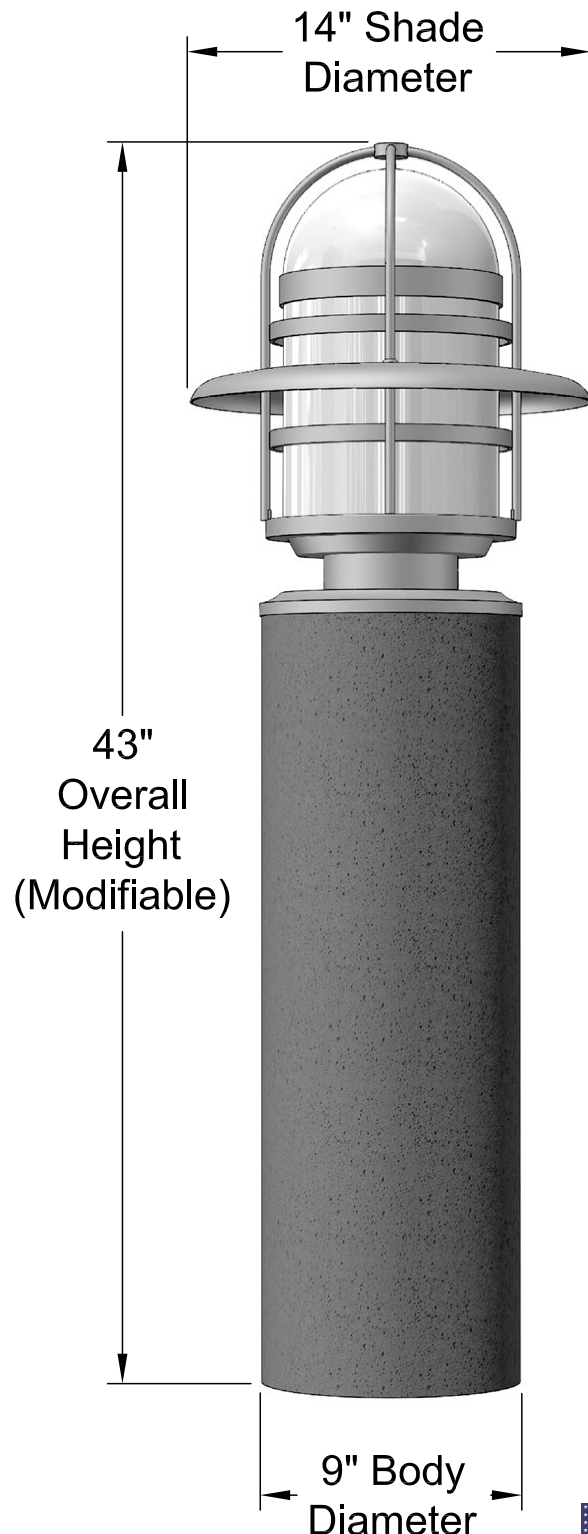

Bollard is "Buy America Act" Compliant Proudly Made in the U.S.A.



Project Name:
Type:

# Bollard - BOL5352

## Ordering Matrix

Environmental Lighting for Architecture, Inc.

1	2	3	4	5	6	7	8	9	10
BOL5352									

### 1. Fixture:

**Matrix #:** **BOL5352**  
**Description:** Concrete Body Bollard


### 2. Size:

**Matrix #:** **43**  
**Description:** 43" Overall Height  
**XX** Customer Determined (Inches)

### 3. Distribution:

**Matrix #:** **V3\***  
**Description:** Type 3 - Vertical  
**V5** Type 5 - Vertical

\* Distribution direction is field adjustable

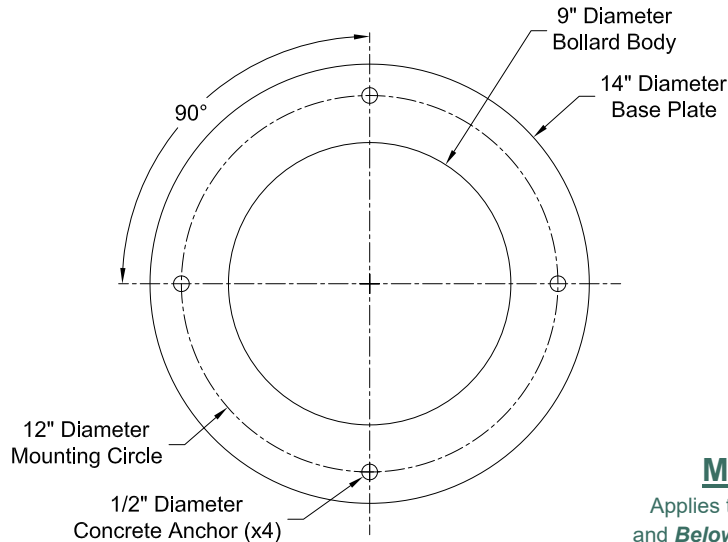

### Mounting

Applies to **Above Ground** and **Below Surface** mounting

### 4. Lamping:

Matrix #:	Wattage*	Description:	Lumens
<b>15LED</b>	15 Watts	LED Tape (4.4w/ft)	1306
<b>INC</b>	35W Max.	Medium Base Socket	
<b>HID*</b>	35W Max.	Contact Factory for Details	
<b>NL</b>	-----	Non-Lit: Solid Flutes	

1) Dimming options available upon request.

\*Other wattages & lumens available upon request.

### 5. Color Temps (k):

Matrix #:	Description:
<b>AM*</b>	Amber Color Temp
<b>27</b>	2700k Color Temp
<b>30</b>	3000k Color Temp
<b>40</b>	4000k Color Temp
<b>50</b>	5000k Color Temp

Note: Other color temperatures & RGB's available upon request.

\*Amber not available in corn cobs.

### 6. Voltage:

Matrix #:	Description:
<b>120</b>	120VAC
<b>208</b>	208VAC
<b>240</b>	240VAC
<b>277</b>	277VAC
<b>347*</b>	347VAC
<b>480*</b>	480VAC

\*Contact ELA for details.

### 7. Lens:

Matrix #:	Description:
<b>CA</b>	Clear Acrylic
<b>CP</b>	Clear Polycarbonate
<b>FA</b>	Frosted Acrylic
<b>FP</b>	Frosted Polycarbonate
<b>OA</b>	Opal Acrylic

### 8. Head Finish:

(Standard Powder Coat)

Matrix #:	Description:
<b>AG</b>	Augustine Green
<b>CC</b>	Charcoal
<b>DB</b>	Dark Bronze
<b>GY</b>	Architectural Grey
<b>MG</b>	Malaga Green
<b>MN</b>	Black - Midnight
<b>PW</b>	Pewter
<b>SB</b>	Statuary Bronze
<b>VL</b>	Village Green
<b>WH</b>	White

Note: Custom colors available upon request.

### 9. Body Finish:

(Standard Powder Coat)

Matrix #:	Description:
<b>AG</b>	Augustine Green
<b>CC</b>	Charcoal
<b>DB</b>	Dark Bronze
<b>GY</b>	Architectural Grey
<b>MG</b>	Malaga Green
<b>MN</b>	Black - Midnight
<b>PW</b>	Pewter
<b>SB</b>	Statuary Bronze
<b>VL</b>	Village Green
<b>WH</b>	White

Note: Custom colors available upon request.

### 10. Options:

1. BBU test button location shall have visibility for testing on site. Consult factory for placement location.

2. BBU LED lumen output reduced in BBU mode.

3. Consult factory for Security Bollard options.

Matrix #:	Description:
<b>BBU*</b>	Battery Backup
<b>PCB</b>	Photocell Button

Matrix #:	Description:
<b>HSS</b>	House Side Shield
<b>SB**</b>	Security Bollard

### ELA Warranty Info:

Environmental Lighting for Architecture, Inc. (ELA) offers a Five (5) Year Warranty on all products exclusively manufactured by ELA. Furthermore, ELA offers a Five (5) Year Warranty on all LED and LED components; and guarantees that no fewer than 90% of the diodes in each fixture will still be operating during this time. Please contact ELA for the details of each warranty.