



Project Name:
Type:


Environmental Lighting for Architecture, Inc.

## Parkside - PRK

### LED Ordering Matrix

# Parkside

The Parkside is ELA's "pumpkin fixture"; which is available in two sizes. Designed to be extremely vandal resistant, the Parkside can be mounted on a pole, cross arm; or be wall mounted. The Parkside is able to generate up to 135 watts of LED power. Designed to be very durable while supplying low energy consumption light output. The Parkside is often specified for parking lots, shopping malls, parks, site and walkway lighting, schools, libraries, and much more.

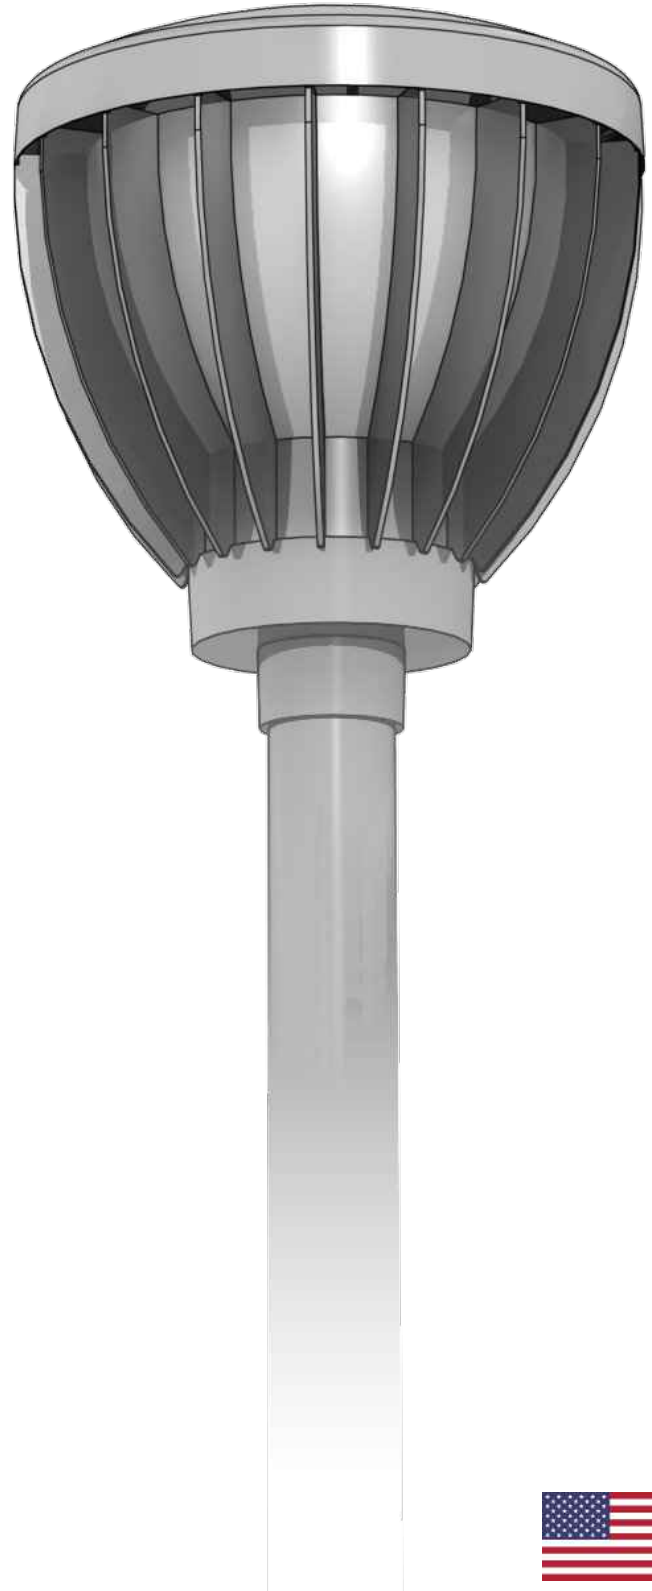

Fixture is "Buy America Act" Compliant Proudly Made in the U.S.A.



Project Name:
Type:

# Parkside - PRK

## LED Ordering Matrix

Environmental Lighting for Architecture, Inc.

1	2	3	4	5	6	7	8	9
PRK								


**1. Fixture:** Matrix #: Description:  
PRK Parkside Fixture

**2. Size:** Matrix #: Weight: EPA:  
13 40 lbs. 0.7  
21 55 lbs. 1.5

**3. Mounting:** Matrix #: Description:  
CR\* Cross arm  
PT\* Post Top  
BR\* Wall Bracket


\*Specify which Cross arm, Pole, or Wall Bracket is to be used. See ELA website for choices.

**4. Distribution:** Matrix #: Description:  
H2 Type 2 - Horizontal  
H3 Type 3 - Horizontal  
H4 Type 4 - Horizontal  
H5 Type 5 - Horizontal  
Horizontal V3 Type 3 - Vertical (Corn Cob)  
Vertical V5 Type 5 - Vertical (Corn Cob)

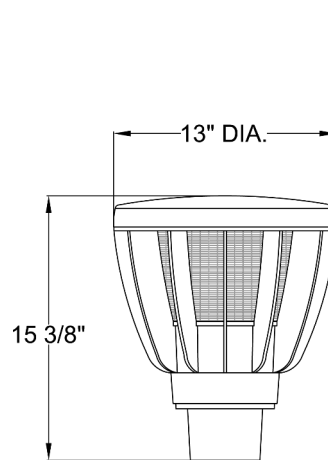

**PRK/13**

Horizontal Max: 50W  
Vertical Max: 18W

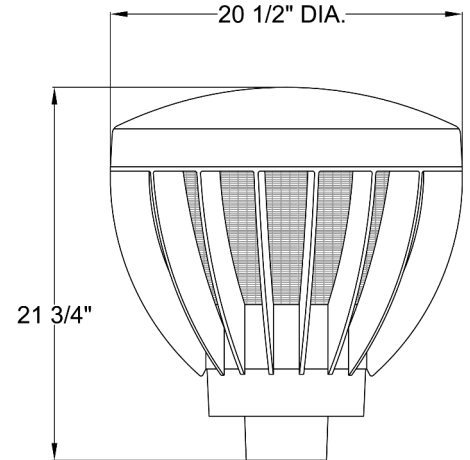

**PRK/21**

Horizontal Max: 135W  
Vertical Max: 120W

5. Lamping:	Matrix #:	Description:	Diodes	Lumens*	Wattage*	Efficacy	LED Drive (mA)	Standard Dimming Type**
	35LED	LED Board	24	3360	35	96	292	1-10VDC, Triac, Forward Phase
	50LED	LED Board	56	4800	50	96	417	1-10VDC, Triac, Forward Phase
	101LED*	LED Board	100	9696	101	96	842	1-10VDC, Triac, Forward Phase
	135LED*	LED Board	100	12960	135	96	1125	1-10VDC, Triac, Forward Phase
Horizontal	18LED	LED Corn Cob	56	1980	18	110	150	Line Voltage On-Board Transformer
Vertical	36LED*	LED Corn Cob	108	3960	36	110	300	Line Voltage On-Board Transformer
	80LED*	LED Corn Cob	234	8800	80	110	667	Line Voltage On-Board Transformer
	120LED*	LED Corn Cob	336	13200	120	110	1000	Line Voltage On-Board Transformer

\* Size 21 ONLY

**6. Color Temps (k):** Matrix #: Description:  
AM\* Amber Color Temp  
27 2700k Color Temp  
30 3000k Color Temp  
40 4000k Color Temp  
50 5000k Color Temp

Note: Other color temperatures & RGB's available upon request.

\*Amber not available in corn cobs.

**7. Voltage:** Matrix #: Description:  
120 120VAC  
208 208VAC  
240 240VAC  
277 277VAC  
347\* 347VAC  
480\* 480VAC

\*Contact ELA for details.

**8. Lens:** Matrix #: Description:  
CA Clear Prismatic Acrylic  
FA Frosted Prismatic Acrylic

**9. Finish:** Matrix #: Description:  
(Standard Powder Coat)  
AG Augustine Green  
CC Charcoal  
DB Dark Bronze  
GY Architectural Gray  
MG Malaga Green  
MN Black - Midnight  
PW Pewter  
SB Statuary Bronze  
VL Village Green  
WH White

Note: Custom colors available upon request.

**10. Options:** Matrix #: Description:  
BBU\*\* Battery Backup  
PCB Photocell Button  
TB Terminal Block  
PCR3\* 3 Pin Photo Control Receptacle  
PCR5\* 5 Pin Photo Control Receptacle  
PCF7\* 7 Pin Photo Control Receptacle  
HSS House Side Shield

1. BBU test button location shall have visibility for testing on site. Consult factory for placement location.

2. BBU LED lumen output reduced in BBU mode.

3. ELA Can integrate client specified wifi /remote control components upon request.

\* See ELA for mounting options.  
\*\* Horizontal LED option ONLY

**ELA Warranty Info:** Environmental Lighting for Architecture, Inc. (ELA) offers a Five (5) Year Warranty on all products exclusively manufactured by ELA. Furthermore, ELA offers a Five (5) Year Warranty on all LED and LED components; and guarantees that no fewer than 90% of the diodes in each fixture will still be operating during this time. Please contact ELA for the details of each warranty.