




Project Name:
Type:

Environmental Lighting for Architecture, Inc.

Futura - FUT LED Ordering Matrix

Futura

The Futura's name says it all: A uniquely designed fixture whose appearance is ahead of its time. However, its contemporary design with attention to every detail and its ability to perform makes the Futura a perfect choice for many of today's lighting applications. Suitable for pole, cross arm, and wall mounting conditions, the Futura is the perfect specification for shopping malls, parking lots, site and walkway lighting, museums, schools, libraries, theaters, high-end residential applications, and much more. Available with a maximum 54 watt of LED while still maintaining excellent light output. The Futura offers unique contemporary styling, extraordinary durability, and excellent lighting performance for many types of projects.

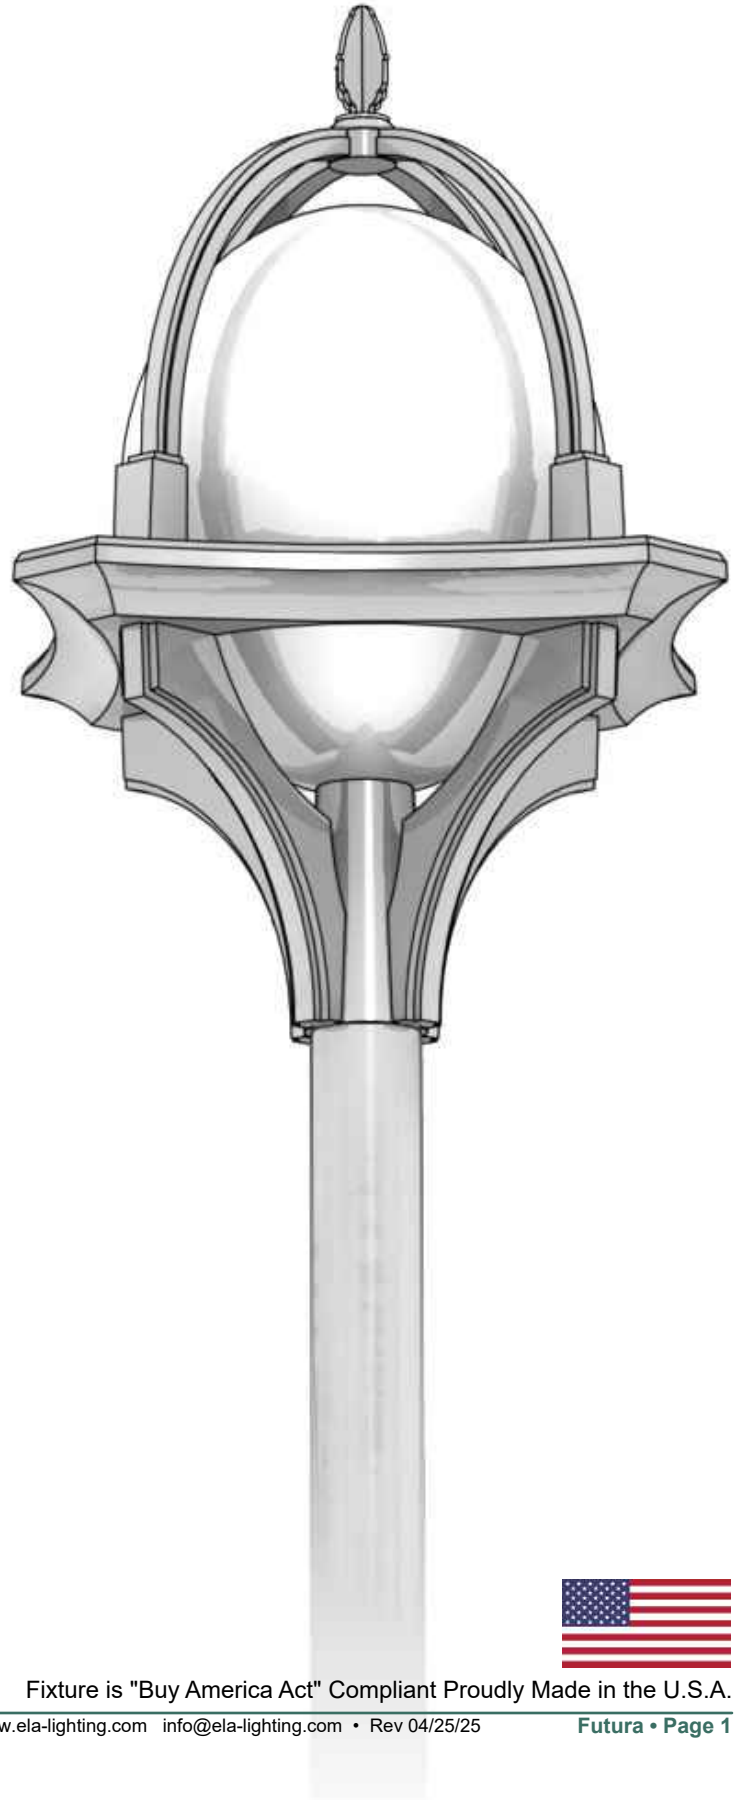

Fixture is "Buy America Act" Compliant Proudly Made in the U.S.A.



Project Name: _____

Type: _____

Futura - FUT

LED Ordering Matrix

Environmental Lighting for Architecture, Inc.

1 **FUT** / 2 / 3 / 4 / 5 / 6 / 7 / 8 / 9



1. Fixture: Matrix #: Description:
FUT Futura Fixture

2. Size: Matrix #: Weight: EPA:
24 38 lbs. 1.4

3. Mounting: Matrix #: Description:
PF* Post Fitter
PM* Pier Mount
WB* Wall Bracket
SP Stem Pendant
CP Chain Pendant

*Specify which pole is to be used.
See ELA website for choices.

4. Distribution: Matrix #: Description:
V3 Type 3 - Vertical
V5 Type 5 - Vertical

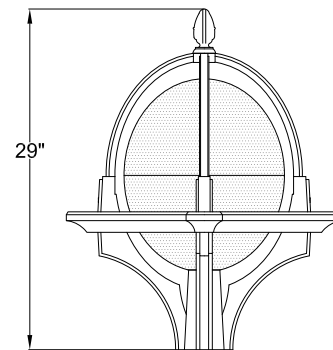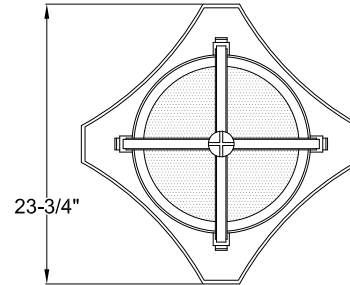

FUT/ 24
Vertical Max: 54W

5. Lamping:	Matrix #:	Description:	Diodes	Lumens*	Wattage*	Efficacy	LED Drive (mA)	Standard Dimming Type**
	18LED	LED Corn Cob	56	1980	18	110	150	Line Voltage On-Board Transformer
	27LED	LED Corn Cob	81	2970	27	110	225	Line Voltage On-Board Transformer
	36LED	LED Corn Cob	108	3960	36	110	300	Line Voltage On-Board Transformer
	45LED	LED Corn Cob	135	4950	45	110	375	Line Voltage On-Board Transformer
	54LED	LED Corn Cob	135	5940	54	110	450	Line Voltage On-Board Transformer

*Other wattages & lumens available upon request.

**Other dimming types available upon request.

6. Color Temps (k):	Matrix #:	Description:
	AM*	Amber Color Temp
	27	2700k Color Temp
	30	3000k Color Temp
	40	4000k Color Temp
	50	5000k Color Temp

Note:
Other color temperatures & RGB's available upon request.

*Amber not available in corn cobs.

7. Voltage:	Matrix #:	Description:
	120	120VAC
	208	208VAC
	240	240VAC
	277	277VAC
	347*	347VAC
	480*	480VAC

*Contact ELA for details.

8. Lens:	Matrix #:	Description:
	CA	Clear Acrylic
	CP	Clear Polycarbonate
	FA	Frosted Acrylic
	FP	Frosted Polycarbonate
	OA	Opal Acrylic

9. Finish:	Matrix #:	Description:
(Standard Powder Coat)	AG	Augustine Green
	CC	Charcoal
	DB	Dark Bronze
	GY	Architectural Grey
	MG	Malaga Green
	MN	Black - Midnight
	PW	Pewter
	SB	Statuary Bronze
	VL	Village Green
	WH	White

Note: Custom colors available upon request.

10. Options:	Matrix #:	Description:
1. BBU test button location shall have visibility for testing on site. Consult factory for placement location.	BBU**	Battery Backup
2. BBU LED lumen output reduced in BBU mode.	PCB	Photocell Button
3. ELA Can integrate client specified wifi /remote control components upon request.	PCR3*	3 Pin Photo Control Receptacle
	PCR5*	5 Pin Photo Control Receptacle
	PCF7*	7 Pin Photo Control Receptacle
	HSS	House Side Shield

* See ELA for mounting options.
** Size 18 and Horizontal LED Option ONLY.

ELA Warranty Info: Environmental Lighting for Architecture, Inc. (ELA) offers a Five (5) Year Warranty on all products exclusively manufactured by ELA. Furthermore, ELA offers a Five (5) Year Warranty on all LED and LED components; and guarantees that no fewer than 90% of the diodes in each fixture will still be operating during this time. Please contact ELA for the details of each warranty.