

Project Name:
Type:


Environmental Lighting for Architecture, Inc.

## Atlantis II - ATS


### LED Ordering Matrix

# Atlantis II

The Atlantis II is a traditional six-sided fixture, but with a decorative hub and post fitter, the Atlantis II offers a classic style. The standard Atlantis II fixture is available with a variety of side lenses from which to choose; and can also be specified with no side lenses to increase light output. The Atlantis II, with its classic traditional style and high performance standards, is a perfect specification for shopping malls, decorative street and site lighting, walkway lighting, parking lots, government buildings, schools, libraries, and much more.

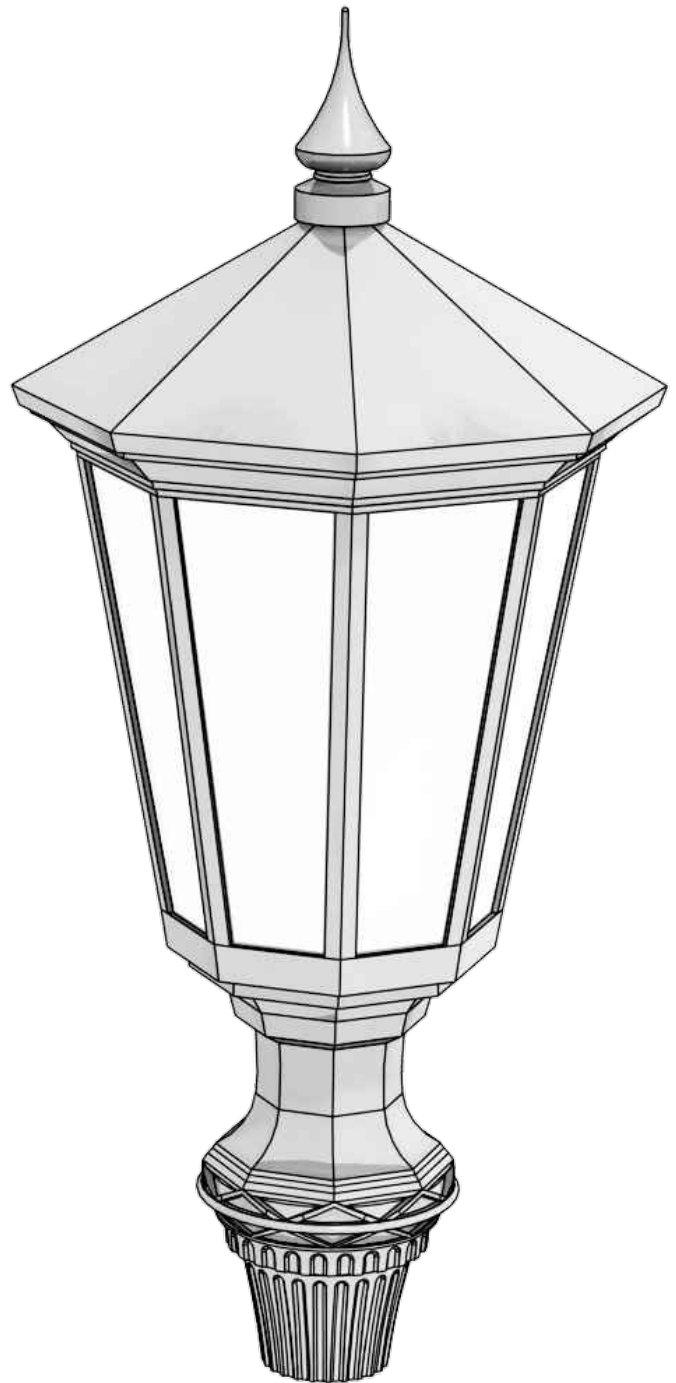

Fixture is "Buy America Act" Compliant Proudly Made in the U.S.A.

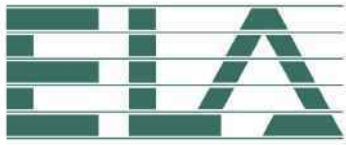

Project Name: \_\_\_\_\_

Type: \_\_\_\_\_

# Atlantis II - ATS

## LED Ordering Matrix

Environmental Lighting for Architecture, Inc.

1 / 2 / 3 / 4 / 5 / 6 / 7 / 8 / 9 / 10

**ATS** / / / / / / / / / /

### 1. Fixture:

Matrix #:  
**ATS**

Description:  
Atlantis II Fixture

### 2. Size:

Matrix #:  
**19**  
**22**

Weight:  
36 lbs.  
50 lbs.

EPA:  
0.8  
2.3

### 3. Mounting:

Matrix #:  
**CA\***  
**PT\***  
**BR\***  
**CP**  
**SP**  
**PM\***

Description:  
Cross Arm  
Post Top  
Wall Bracket  
Chain Pendant  
Stem Pendant  
Pier Mount


\*Specify which Cross Arm, Pole, or Wall Bracket is to be used. See ELA website for choices.

### 4. Distribution:

Matrix #:  
**H2**  
**H3**  
**H4**  
**H5**  
  
**V3**  
**V5**

Description:  
Type 2 - Horizontal  
Type 3 - Horizontal  
Type 4 - Horizontal  
Type 5 - Horizontal  
  
Type 3 - Vertical (Corn Cob)  
Type 5 - Vertical (Corn Cob)

Horizontal  
Vertical

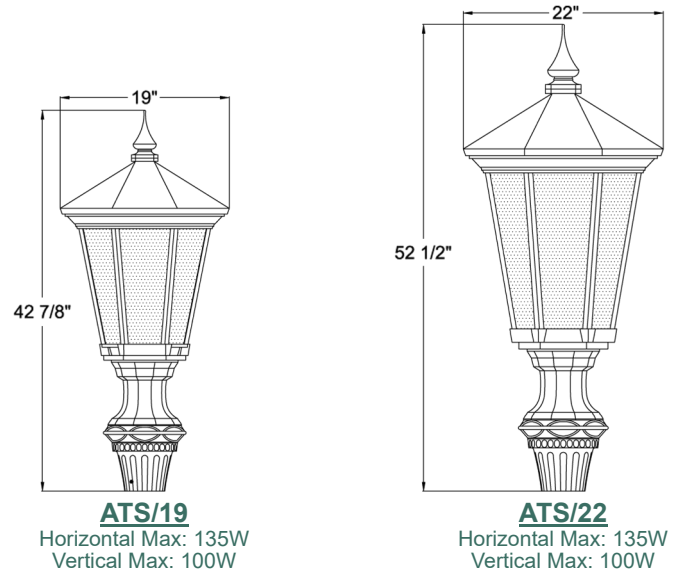

### 5. Lamping:

Matrix #:  
**35LED**  
**50LED**  
**69LED**  
**101LED**  
**135LED**  
  
**18LED**  
**27LED**  
**36LED**  
**45LED**  
**54LED**  
**80LED**  
**100LED**

Description:  
LED Board  
LED Board  
LED Board  
LED Board  
LED Board  
  
LED Corn Cob  
LED Corn Cob  
LED Corn Cob  
LED Corn Cob  
LED Corn Cob  
LED Corn Cob  
LED Corn Cob

Diodes  
24  
56  
56  
100  
100  
  
56  
56  
56  
135  
234  
234  
336

Lumens\*  
3360  
4800  
6624  
9696  
12960  
  
1980  
2970  
3456  
4320  
5940  
8800  
11000

Wattage\*  
35  
50  
69  
101  
135  
  
18  
27  
36  
45  
54  
80  
100

Efficacy  
96  
96  
96  
96  
96  
  
110  
110  
110  
110  
110  
110  
110

LED Drive (mA)  
292  
417  
575  
842  
1125  
  
150  
225  
300  
375  
450  
667  
833

Standard Dimming Type\*\*  
1-10VDC, Triac, Forward Phase  
1-10VDC, Triac, Forward Phase  
1-10VDC, Triac, Forward Phase  
1-10VDC, Triac, Forward Phase  
1-10VDC, Triac, Forward Phase  
  
Line Voltage On-Board Transformer  
Line Voltage On-Board Transformer  
Line Voltage On-Board Transformer  
Line Voltage On-Board Transformer  
Line Voltage On-Board Transformer  
Line Voltage On-Board Transformer  
Line Voltage On-Board Transformer

\*Other wattages & lumens available upon request.

\*\*Other dimming types available upon request.

### 6. Color Temps (k):

Matrix #:  
**AM\***  
**27**  
**30**  
**40**  
**50**

Description:  
Amber Color Temp  
2700k Color Temp  
3000k Color Temp  
4000k Color Temp  
5000k Color Temp

Note: Other color temperatures & RGB's available upon request.

\*Amber not available in corn cobs.

### 7. Voltage:

Matrix #:  
**120**  
**208**  
**240**  
**277**  
**347\***  
**480\***

Description:  
120VAC  
208VAC  
240VAC  
277VAC  
347VAC  
480VAC

\*Contact ELA for details.

### 8. Lens:

Matrix #:  
**CA**  
**FA**  
**SA**  
**OA**  
**CG**  
**FG**  
**CB**

Description:  
Clear Acrylic  
Frosted Acrylic  
Seedy Acrylic  
Opal Acrylic  
Clear Glass  
Frosted Glass  
Clear Beveled Glass

Matrix #:  
**FB**  
**SG**  
**OG**  
**CP**  
**FP**  
**HCG\***  
**HFG\***

Description:  
Frosted Beveled Glass  
Seedy Glass  
Opal Glass  
Clear Polycarbonate  
Frosted Polycarbonate  
Horizontal Clear Glass  
Horizontal Frosted Glass

\* Tempered Glass.

### 9. Finish:

(Standard Powder Coat)

Matrix #:  
**AG**  
**CC**  
**DB**  
**GY**  
**MG**  
**MN**  
**PW**  
**SB**  
**VL**  
**WH**

Description:  
Augustine Green  
Charcoal  
Dark Bronze  
Architectural Grey  
Malaga Green  
Black - Midnight  
Pewter  
Statuary Bronze  
Village Green  
White

Note: Custom colors available upon request.

### 10. Options:

Matrix #:  
**BBU**  
**PCB**  
**TB**  
**PCR3\***  
**PCR5\***  
**PCR7\***  
**HSS**

Description:  
Battery Backup  
Photocell Button  
Terminal Block  
3 Pin Photo Control Receptacle  
5 Pin Photo Control Receptacle  
7 Pin Photo Control Receptacle  
House Side Shield

1. BBU test button location shall have visibility for testing on site. Consult factory for placement location. Horizontal option ONLY.

2. BBU LED lumen output reduced in BBU mode.

3. ELA Can integrate client specified Wifi /remote control components upon request.

\* See ELA for mounting options.

### ELA Warranty Info:

Environmental Lighting for Architecture, Inc. (ELA) offers a Five (5) Year Warranty on all products exclusively manufactured by ELA. Furthermore, ELA offers a Five (5) Year Warranty on all LED and LED components; and guarantees that no fewer than 90% of the diodes in each fixture will still be operating during this time. Please contact ELA for the details of each warranty.