



ELA LIGHTING COMPANY, INC.
 17891 Arenth Avenue
 City of Industry, CA 91748
 Web: www.ela-lighting.com
 E-mail: info@ela-lighting.com

Project


Type

Virginia Post Top Lantern



EPA 1.3

WT. - 24 LBS.

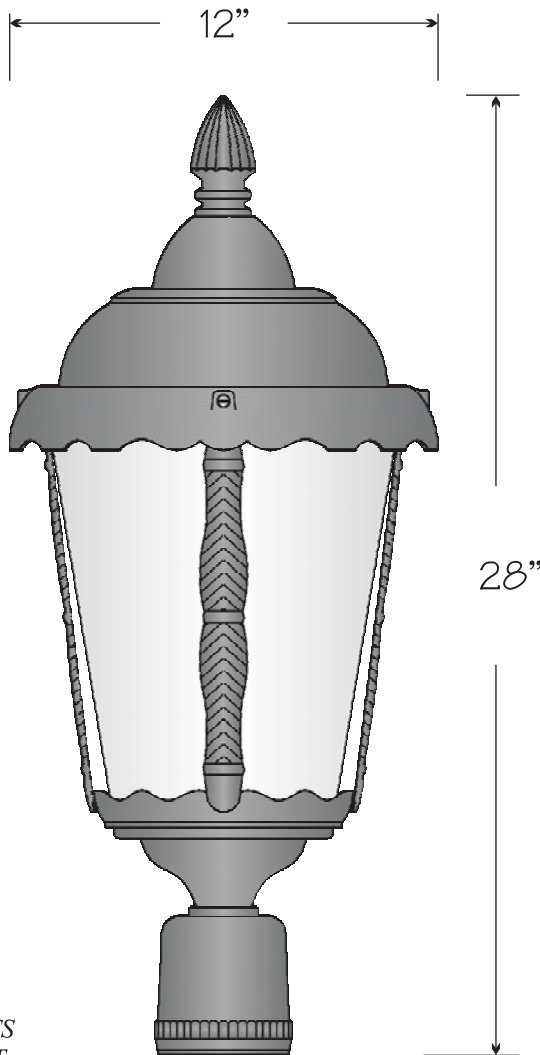

PHOTOMETRICS & LAYOUTS
 AVAILABLE UPON REQUEST.

L1134 Luminaire

WATTAGE:
 70, 100, or 150

POSTLINE BALLAST:
 MH (Metal Halide)-call factory
 HPS (High Pressure Sodium)
 PL (Compact Fluorescent)
 PLS (Pulse Start)
 INC (Incandescent)
 OTHER (Please Specify)

VOLTAGE:
 120, 208, 240, and 277
 (Multi-Tap)

SOCKET:
 MB - (Medium Base Porcelain)
 MG - (Mogul Base Porcelain)

OPTICS:
 PG = Prismatic Glass Refractor
 PG2 (Type II), PG3 (Type III),
 or PG5 (Type V).
 -or-
 SP & ST = Polished Alum. Reflector
 SP (Spun) or ST (Stacked)

DIFFUSER:
 SAC - (Seedy Acrylic)
 CAC - (Clear Acrylic)
 FAC - (Frosted Acrylic)
 CLX - (Clear Lexan)
 OTHER (Please Specify)

POWDER COAT FINISHES:
 MN (Midnight), DB (Dark Bronze),
 WH (White), VL (Village Green),
 NR (Natural Russet), GY (Gray),
 DG (Dark Green), or
 CUSTOM (Specify)

FIXTURE	WATTAGE	BALLAST	VOLTAGE	OPTICS	DIFFUSER	COLOR	OPTIONS
---------	---------	---------	---------	--------	----------	-------	---------

L1134

OPTIONS:
 SEE END OF CATALOG

SPECIFICATIONS:

The **L1134** lantern is a period style cast aluminum (#319 grade) fixture. The cage is a uniform one piece casting not less than .125" thick. Corrosion resistant.

TESTING:

This product and all its components shall be U.L. Listed.

ELECTRICAL:

Ballasts are High Power Factor (HPF). Sockets are Medium Base 4KV Rated.

OPTICS:

Refractors shall be precision molded of Borosilicate glass with Types 2, 3 or 5 distribution or of spun aluminum.

DARK SKIES:

Units will be hydroformed or segmented sharp cut-off optics.

WARRANTY:

3-Year Manufacturer's warranty.

ELA LIGHTING

- > An American Tradition Since 1929.
- > Custom Capabilities Second To None.
- > Other Materials Such As Copper, Brass, Stainless Steel And Iron Are Also Available.

Call Toll Free: 1-800-423-6561

Fax: 1-626-965-9494



ELA LIGHTING COMPANY, INC.

17891 Arenth Avenue

City of Industry, CA 91748

Web: www.ela-lighting.com E-mail: info@ela-lighting.com

Phone: 800/423-6561 Fax: 626/965-9494

*Photometry Testing Done By an
Independent Testing Laboratory.*


L1134 Lantern

CONVERSION FACTORS

MOUNTING HEIGHTS


LAMP TYPE	LUMENS	9'	10'	12'	14'	16'	18'	20'	22'	25'
35 CLR HPS	2250	.23	.20	.14	.10	.08	.06			
70 CLR HPS	5800	.60	.52	.36	.27	.20	.16			
100 CLR HPS	9500	1.00	.86	.59	.44	.33	.26			
150 CLR HPS	16000	1.50	1.40	1.00	.74	.56	.44	.32	.20	.08
50 CLR MH	3800	.37	.33	.24	.18	.13	.11			
70 CLR MH	5500	.54	.48	.34	.25	.19	.15			
100 CLR MH	8500	.87	.76	.53	.39	.30	.23			
175 CLR MH	16600	1.75	1.50	1.00	.77	.58	.46	.34	.22	.10
250 CLR MH	20500					.75	.57	.39	.21	
400 CLR MH	36000					1.20	.92	.64	.36	.08
100 DX MV	4200	.42	.37	.26	.19	.15	.12			
150 DX MV	8600	.85	.75	.54	.40	.30	.24			

SPECIFICATIONS

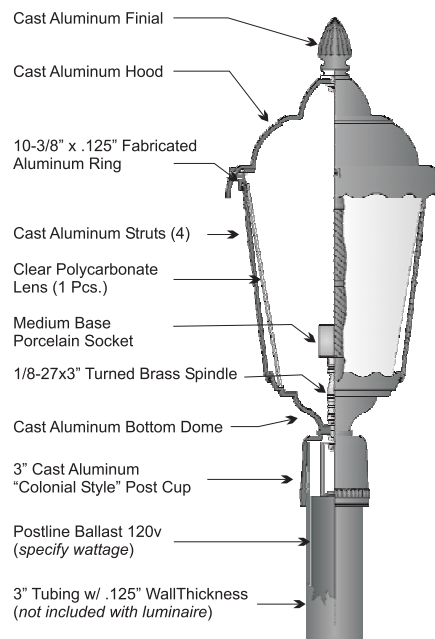

ISOLUX CHARTS

Type V Cut-off
150w CLR HPS, 16000 Lumens
12' Height

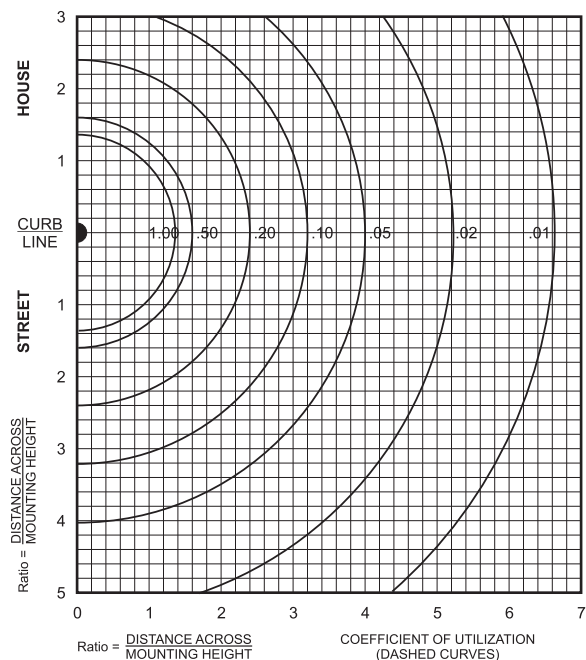

Type II Cut-off
150w CLR HPS, 16000 Lumens
12' Height

