


Project Name:
Type:

Environmental Lighting for Architecture, Inc.


## Americana - AME LED Ordering Matrix

# Americana

The Americana is a six-sided lantern with a “Transitional” style, mixing traditional characteristics with a few contemporary details. Suitable for pole, cross arm, or wall mounting conditions, the Americana is often specified for shopping malls, parking lots, government buildings, site and walkway lighting, schools, libraries, or high-end residential applications. Constructed of high grade A356 cast aluminum with a powder coat finish, the Americana is built for the toughest of outdoor conditions. The Americana can also meet the performance standards of today’s lighting demands. Available with a maximum 200 watts of LED power. Style, durability, and performance – the Americana has it all!

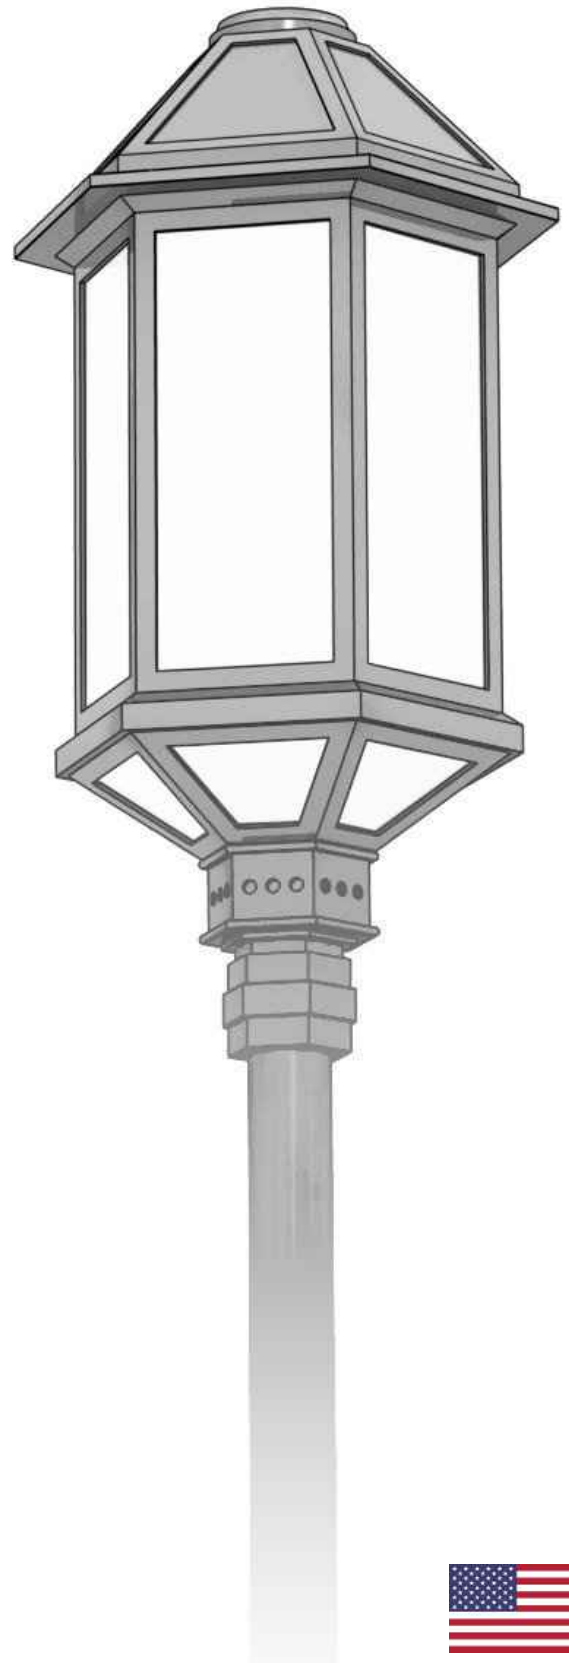

Fixture is "Buy America Act" Compliant Proudly Made in the U.S.A.

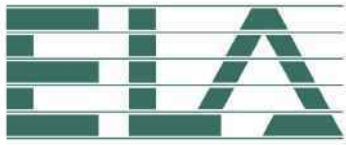

Project Name:
Type:

# Americana - AME

## LED Ordering Matrix

Environmental Lighting for Architecture, Inc.

1	2	3	4	5	6	7	8	9	10
AME									


**1. Fixture:** Matrix #: **AME** Description: Americana Fixture

**2. Size:** Matrix #: **20** Weight: 52 lbs. EPA: 2.1  
**28** 70 lbs. 4.0

**3. Mounting:** Matrix #: **CA\*** Description: Cross Arm  
**PT\*** Post Top  
**WB\*** Wall Bracket  
**PM\*** Pier Mount

\*Specify which Cross Arm, Pole, or Wall Bracket is to be used. See ELA website for choices.

**4. Distribution:** Matrix #: **H2** Description: Type 2 - Horizontal  
**H3** Type 3 - Horizontal  
**H4** Type 4 - Horizontal  
**H5** Type 5 - Horizontal  
Horizontal  
**V3** Type 3 - Vertical (Corn Cob)  
**V5** Type 5 - Vertical (Corn Cob)  
Vertical

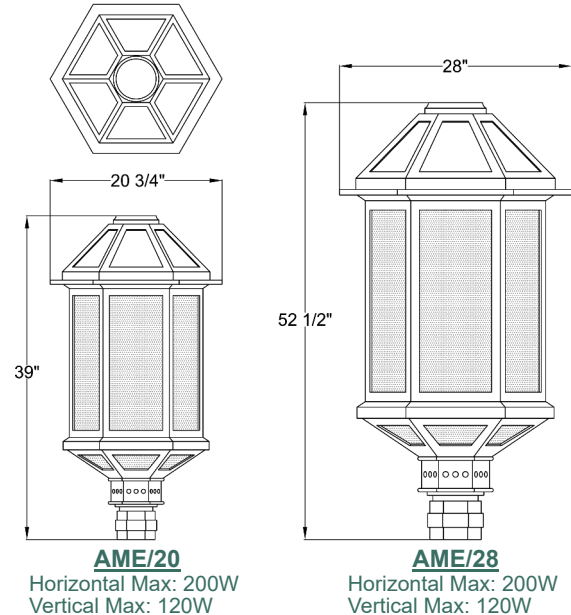

<b>5. Lamping:</b>	<u>Matrix #:</u>	<u>Description:</u>	<u>Diodes</u>	<u>Lumens*</u>	<u>Wattage*</u>	<u>Efficacy</u>	<u>LED Drive (mA)</u>	<u>Standard Dimming Type**</u>
	<b>35LED</b>	LED Board	24	3360	35	96	292	1-10VDC, Triac, Forward Phase
	<b>69LED</b>	LED Board	56	6624	69	96	575	1-10VDC, Triac, Forward Phase
	<b>101LED</b>	LED Board	100	9696	101	96	842	1-10VDC, Triac, Forward Phase
	<b>135LED</b>	LED Board	100	12960	135	96	1125	1-10VDC, Triac, Forward Phase
	<b>160LED</b>	LED Board	198	15360	160	96	1333	1-10VDC, Triac, Forward Phase
	<b>200LED</b>	LED Board	198	19200	200	96	1667	1-10VDC, Triac, Forward Phase
Horizontal	<b>18LED</b>	LED Corn Cob	56	1980	18	110	150	Line Voltage On-Board Transformer
Vertical	<b>27LED</b>	LED Corn Cob	56	2970	27	110	225	Line Voltage On-Board Transformer
	<b>45LED</b>	LED Corn Cob	81	4950	45	110	375	Line Voltage On-Board Transformer
	<b>54LED</b>	LED Corn Cob	135	5184	54	110	450	Line Voltage On-Board Transformer
	<b>80LED</b>	LED Corn Cob	234	8800	80	110	667	Line Voltage On-Board Transformer
	<b>100LED</b>	LED Corn Cob	336	9600	100	110	833	Line Voltage On-Board Transformer
	<b>120LED</b>	LED Corn Cob	336	13200	120	110	1000	Line Voltage On-Board Transformer

\*Other wattages & lumens available upon request.

\*\*Other dimming types available upon request.

**6. Color Temps (k):** Matrix #: **AM\*** Description: Amber Color Temp  
**27** 2700k Color Temp  
Matrix #: **30** Description: 3000k Color Temp  
**40** 4000k Color Temp  
**50** 5000k Color Temp

Note: Other color temperatures & RGB's available upon request.  
\*Amber not available in corn cobs.

### 8. Lens:

<u>Matrix #:</u>	<u>Description:</u>	<u>Matrix #:</u>	<u>Description:</u>
<b>CG*</b>	Clear Glass	<b>FA</b>	Frosted Acrylic
<b>FG*</b>	Frosted Glass	<b>SA</b>	Seedy Acrylic
<b>SG</b>	Seedy Glass	<b>OA</b>	Opal Acrylic
<b>CA</b>	Clear Acrylic	<b>HCG**</b>	Horizontal Clear Glass
		<b>HFG**</b>	Horizontal Frosted Glass

\* All flat glass panels are tempered.

\*\* Horizontal Distribution ONLY

### 10. Options:

<u>Matrix #:</u>	<u>Description:</u>
<b>BBU**</b>	Battery Backup
<b>PCB</b>	Photocell Button
<b>TB</b>	Terminal Block
<b>PCR3*</b>	3 Pin Photo Control Receptacle
<b>PCR5*</b>	5 Pin Photo Control Receptacle
<b>PCF7*</b>	7 Pin Photo Control Receptacle
<b>HSS</b>	House Side Shield

\* See ELA for mounting options.  
\*\* Horizontal LED option ONLY

**7. Voltage:** Matrix #: **120** Description: 120VAC  
**208** 208VAC  
**240** 240VAC  
Matrix #: **277** Description: 277VAC  
**347\*** 347VAC  
**480\*** 480VAC

\*Contact ELA for details.

### 9. Finish:

(Standard Powder Coat)

<u>Matrix #:</u>	<u>Description:</u>	<u>Matrix #:</u>	<u>Description:</u>
<b>AG</b>	Augustine Green	<b>MN</b>	Black - Midnight
<b>CC</b>	Charcoal	<b>PW</b>	Pewter
<b>DB</b>	Dark Bronze	<b>SB</b>	Statuary Bronze
<b>GY</b>	Architectural Grey	<b>VL</b>	Village Green
<b>MG</b>	Malaga Green	<b>WH</b>	White

Note: Custom colors available upon request.

### ELA Warranty Info:

Environmental Lighting for Architecture, Inc. (ELA) offers a Five (5) Year Warranty on all products exclusively manufactured by ELA. Furthermore, ELA offers a Five (5) Year Warranty on all LED and LED components; and guarantees that no fewer than 90% of the diodes in each fixture will still be operating during this time. Please contact ELA for the details of each warranty.