



Project Name:
Type:


Environmental Lighting for Architecture, Inc.

Chute - CHU

LED Ordering Matrix

Chute

The Chute fixture is ideal for most outdoor site and area lighting applications. The Chute has been designed to provide maximize lumen output while being able to withstand most outdoor conditions. Cast from high grade, 356 alloy, aluminum; finished with a thermoset polyester powder-coat; and designed with a low EPA of 2.0, the Chute is sure to have a long life. And full cut-off optics, a center cone above the fitter to disperse potential uplight, and able to hold up to 200 watts of LED; the chute fixture will generate maximum lumens on the ground. Having these features is why the Chute is one of ELA's best sellers.

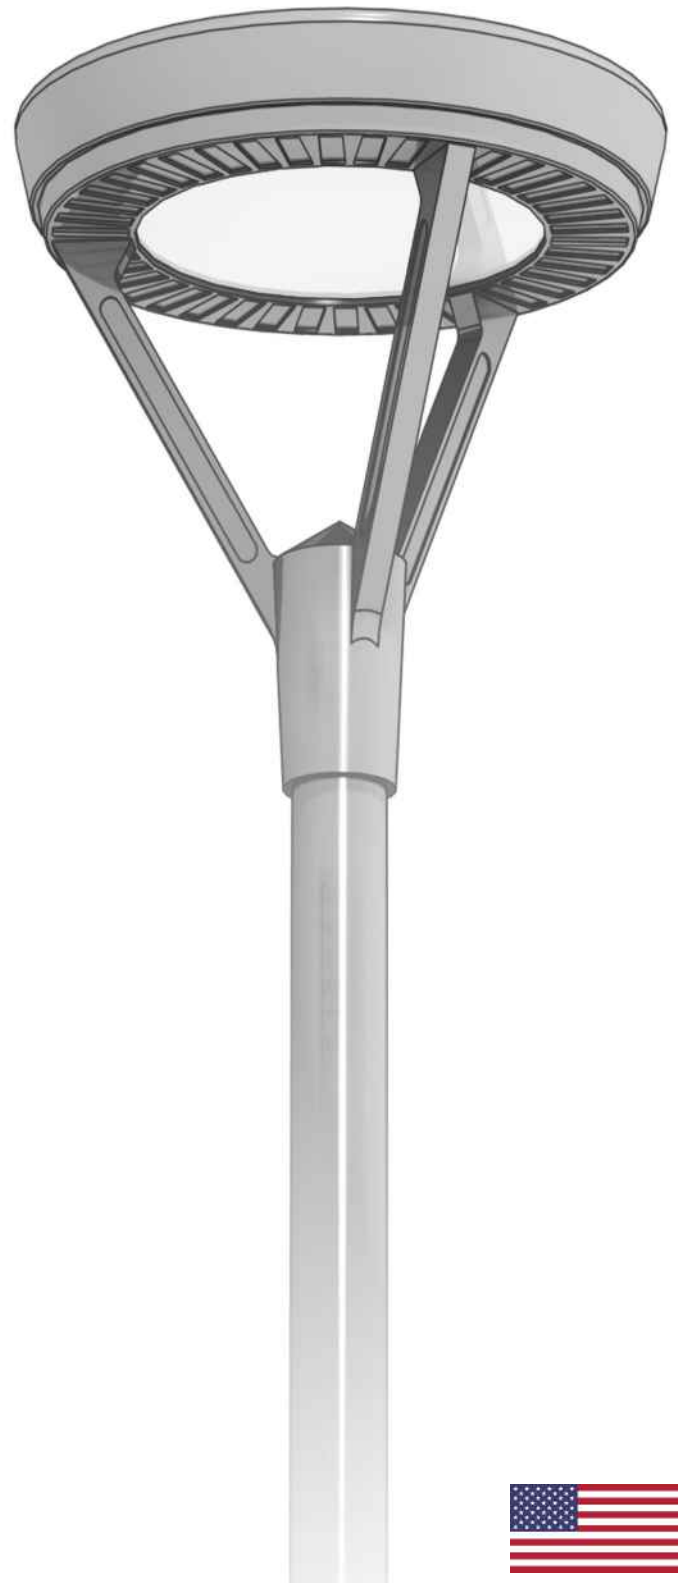

Fixture is "Buy America Act" Compliant Proudly Made in the U.S.A.



Project Name:
Type:

Chute - CHU

LED Ordering Matrix

Environmental Lighting for Architecture, Inc.

1	2	3	4	5	6	7	8	9	10
CHU									

1. Fixture: Matrix #: **CHU** Description: Chute Fixture


2. Size: Matrix #: **28** Weight: 52 lbs. EPA: 2.0

3. Mounting: Matrix #: **CR*** Description: Cross Arm
PT* Post Top
BR* Wall Bracket


*Specify which Cross Arm, Pole, or Wall Bracket is to be used. See ELA website for choices.

4. Distribution: Matrix #: **H2** Description: Type 2 - Horizontal
H3 Type 3 - Horizontal
H4 Type 4 - Horizontal
H5 Type 5 - Horizontal

Horizontal Only

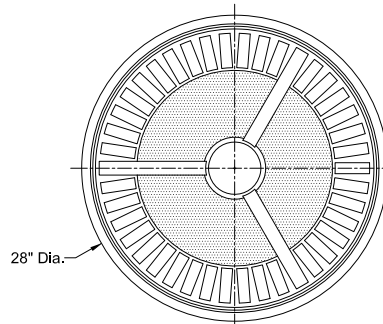

Bottom View
Horizontal Max: 200w

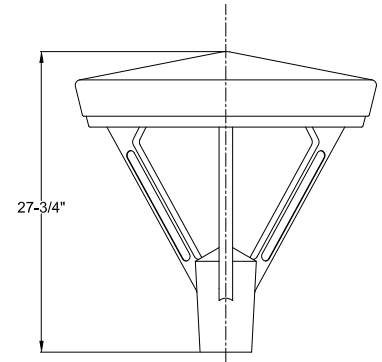

Plan View
Horizontal Max: 200w

5. Lamping:	Matrix #:	Description:	Diodes	Lumens*	Wattage*	Efficacy	LED Drive (mA)	Standard Dimming Type**
Horizontal Only	50LED	LED Board	56	4800	50	96	417	1-10VDC, Triac, Forward Phase
	101LED	LED Board	100	9696	101	96	842	1-10VDC, Triac, Forward Phase
	160LED	LED Board	198	15360	160	96	1333	1-10VDC, Triac, Forward Phase
	200LED	LED Board	198	19200	200	96	1667	1-10VDC, Triac, Forward Phase

*Other wattages & lumens available upon request.

**Other dimming types available upon request.

6. Color Temps (k): Matrix #: **AM** Description: Amber Color Temp
27 2700k Color Temp
30 3000k Color Temp
40 4000k Color Temp
50 5000k Color Temp

Note: Other color temperatures & RGB's available upon request.

7. Voltage: Matrix #: **120** Description: 120VAC
208 208VAC
240 240VAC
277 277VAC
347* 347VAC
480* 480VAC

*Contact ELA for details.

8. Lens: Matrix #: **CG*** Description: Clear Tempered Glass
FG* Frosted Tempered Glass
OG* Opal Glass

*Full Cut-Off Compliant.

9. Finish: Matrix #: **AG** Description: Augustine Green
CC Charcoal
DB Dark Bronze
GY Architectural Grey
MG Malaga Green
MN Black - Midnight
PW Pewter
SB Statuary Bronze
VL Village Green
WH White

Note: Custom colors available upon request.

10. Options: Matrix #: **BBU** Description: Battery Backup
PCB Photocell Button
TB Terminal Block
PCR3* 3 Pin Photo Control Receptacle
PCR5* 5 Pin Photo Control Receptacle
PCF7* 7 Pin Photo Control Receptacle
HSS House Side Shield

1. BBU test button location shall have visibility for testing on site. Consult factory for placement location.

2. BBU LED lumen output reduced in BBU mode.

3. ELA Can integrate client specified wifi /remote control components upon request.

* See ELA for mounting options.

ELA Warranty Info:

Environmental Lighting for Architecture, Inc. (ELA) offers a Five (5) Year Warranty on all products exclusively manufactured by ELA. Furthermore, ELA offers a Five (5) Year Warranty on all LED and LED components; and guarantees that no fewer than 90% of the diodes in each fixture will still be operating during this time. Please contact ELA for the details of each warranty.