


Project Name:	Type:
Notes:	Order Matrix Number:

Environmental Lighting for Architecture, Inc.


DOCKSIDE 2

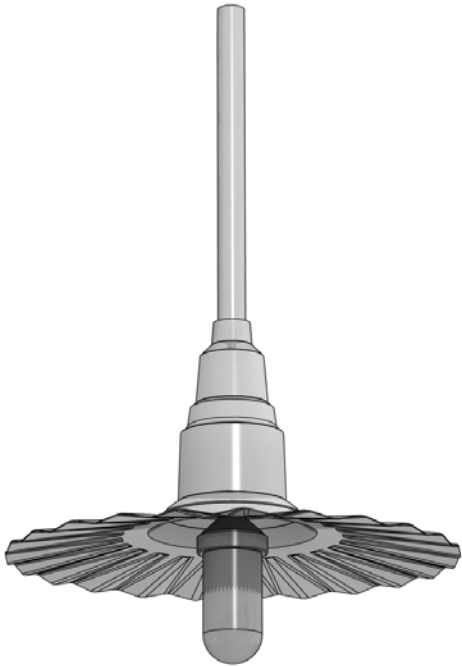


Available in five sizes of radial wave style shades, up to 24" diameter, with a clear or frosted glass jelly jar, the *Dockside 2* is an excellent performing outdoor pendant mounted fixture with a nostalgic style. Suitable for cross arm, ceiling (chain or stem), or wall mounting conditions, the *Dockside 2* is often specified for restaurants, shopping malls, court houses, museums, historical sites, government buildings, schools and universities, parking lots, site and walkway lighting, lighting for "Old Town" sections of cities, and much more.

Constructed of high grade aluminum and finished with a powder-coated finish, with the inside finished in white to maximize optics, the *Dockside 2* is built to endure all outdoor conditions. The *Dockside 2* is available in up to a maximum 150 watt Metal Halide or High Pressure Sodium and can also accommodate today's **Low-Energy** requirements with an assortment of CFL lamps up to 57 watts.

The *Dockside 2* has everything you need: Style, durability, and excellent performance to meet many of today's lighting specifications.

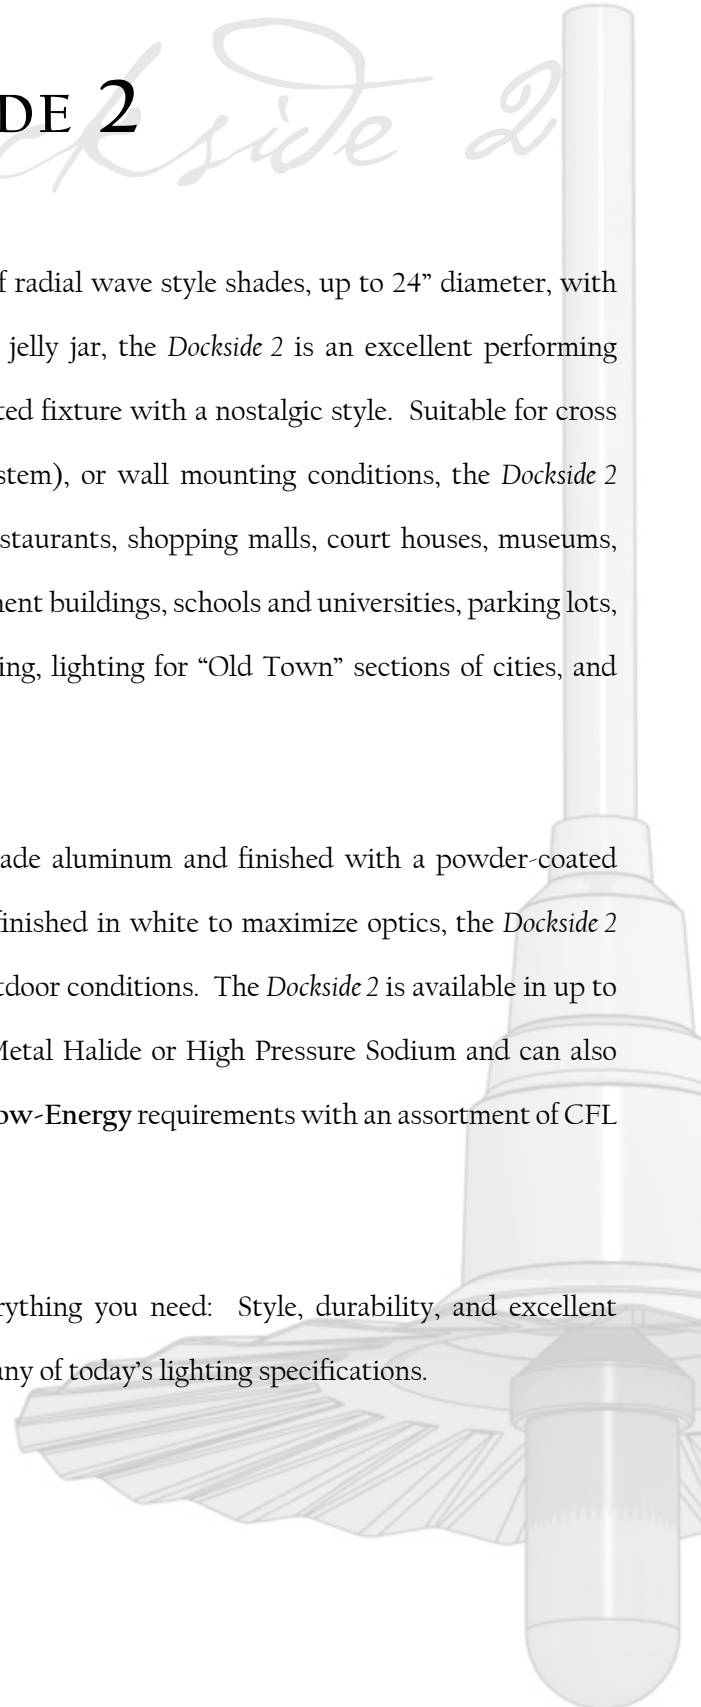




Environmental Lighting for Architecture, Inc.

Ordering Matrix Dockside 2 - DK2

1 Fixture	/	2 Size	/	3 Mounting	/	4 Optics	/	5 Ballast	/	6 Voltage	/	7 Lens	/	8 Color	/	9 Option
DK2	/	20	/	CA	/	V5	/	100PSMH	/	120	/	CG	/	CY	/	--

1. Fixture: DK2


2. Size

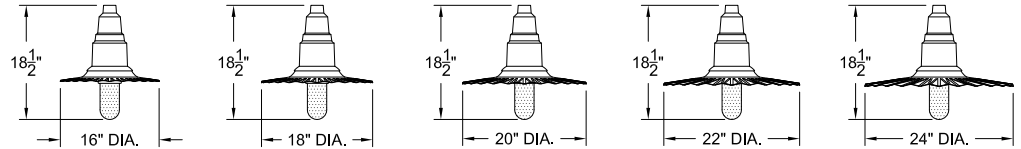

Matrix #:	16	18	20	22	24
Description:					
Notes:	Max Wattage 150W	Max Wattage 150W	Max Wattage 150W	Max Wattage 150W	Max Wattage 150W
EPA:	0.6	0.6	0.6	0.7	0.7
Weight:	21 lbs.	22 lbs.	23 lbs.	24 lbs.	24 lbs.

Notes:
1. Standard size for all globes is 10" diameter.

3. Mounting

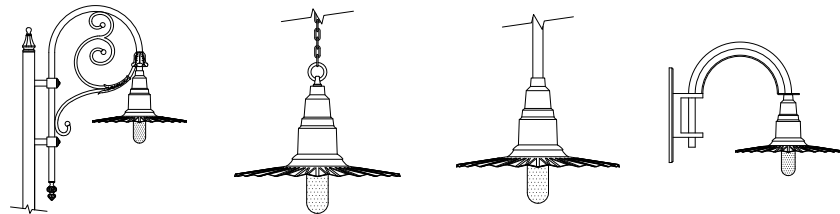


Matrix #:	CA	CP	SP	WB
Description:	Cross Arm	Chain Pendant	Stem Pendant	Wall Bracket

Notes:
1. Please consult factory for other mounting options.

4. Optics

Vertical



Matrix #:
Description:





V5
TYPE 5


5. Ballast

Description:	Incandescent	Pulse Start Metal Halide	Metal Halide	High Pressure Sodium	Compact Fluorescent
(Watts / Type)	(Watts / Type)	(Watts / Type)	(Watts / Type)	(Watts / Type)	(Watts / Type)
Matrix #:	INC	50PSMH 70PSMH 100PSMH 150PSMH	50MH 70MH T6 70MH 100MH T6 150MH 150MH	50HPS 70HPS 100HPS 150HPS	13CFL 18CFL 26CFL 32CFL 42CFL 57CFL

Notes:
1. Electronic ballast available for 50, 70, and 100 watt MH lamps.
2. Other wattages available. Consult factory.

6. Voltage	<table><tr><td>Matrix #:</td><td>120</td><td>208</td><td>240</td><td>277</td><td>347</td><td>480</td></tr><tr><td>Description:</td><td>120V</td><td>208V</td><td>240V</td><td>277V</td><td>347V</td><td>480V</td></tr></table>						Matrix #:	120	208	240	277	347	480	Description:	120V	208V	240V	277V	347V	480V																																						
Matrix #:	120	208	240	277	347	480																																																				
Description:	120V	208V	240V	277V	347V	480V																																																				
7. Lens	 CG Clear Glass Jelly Jar  FG Frosted Glass Jelly Jar																																																									
Notes: Consult factory for custom lens options.																																																										
8. Color	<table><tr><th colspan="2">Powder Coat Finish</th><th colspan="2">Hand-Applied Finish</th></tr><tr><td>Matrix #</td><td>Description</td><td>Matrix #</td><td>Description</td><td>Matrix #</td><td>Description</td></tr><tr><td>AG</td><td>Augustine Green</td><td>MG</td><td>Malaga Green</td><td>CH</td><td>Cracked Hide</td></tr><tr><td>GY</td><td>Architectural Grey</td><td>MN</td><td>Midnight</td><td>LV</td><td>Light Verde</td></tr><tr><td>CC</td><td>Charcoal</td><td>PW</td><td>Pewter</td><td>OR</td><td>Old Iron</td></tr><tr><td>CY</td><td>Clay</td><td>SS</td><td>Sand Storm</td><td>R</td><td>Rust</td></tr><tr><td>DB</td><td>Dark Bronze</td><td>SB</td><td>Statuary Bronze</td><td>V</td><td>Verde</td></tr><tr><td>HR</td><td>Harbor Blue</td><td>VL</td><td>Village Green</td><td></td><td></td></tr><tr><td>HP</td><td>Hammered Pewter</td><td>W</td><td>White</td><td></td><td></td></tr></table>						Powder Coat Finish		Hand-Applied Finish		Matrix #	Description	Matrix #	Description	Matrix #	Description	AG	Augustine Green	MG	Malaga Green	CH	Cracked Hide	GY	Architectural Grey	MN	Midnight	LV	Light Verde	CC	Charcoal	PW	Pewter	OR	Old Iron	CY	Clay	SS	Sand Storm	R	Rust	DB	Dark Bronze	SB	Statuary Bronze	V	Verde	HR	Harbor Blue	VL	Village Green			HP	Hammered Pewter	W	White		
Powder Coat Finish		Hand-Applied Finish																																																								
Matrix #	Description	Matrix #	Description	Matrix #	Description																																																					
AG	Augustine Green	MG	Malaga Green	CH	Cracked Hide																																																					
GY	Architectural Grey	MN	Midnight	LV	Light Verde																																																					
CC	Charcoal	PW	Pewter	OR	Old Iron																																																					
CY	Clay	SS	Sand Storm	R	Rust																																																					
DB	Dark Bronze	SB	Statuary Bronze	V	Verde																																																					
HR	Harbor Blue	VL	Village Green																																																							
HP	Hammered Pewter	W	White																																																							
Notes: Consult factory for custom colors.																																																										
9. Options	 BBU Battery Backup  TB Terminal Block  PCB Photocell Button  HSS House Side Shield																																																									
Notes: 1. BBU option is available for fluorescent lamp only. 2. Test button location shall have visibility for testing on site. Consult factory for placement location.																																																										
Photocell Options: Photocell is available in 120 thru 480 volts. Consult factory. Specify when ordering.																																																										

Fixture Ordering Example:




DK2/20/CA/V5/100PSMH/120/CG/CY

1	2	3	4	5	6	7	8	9								
Fixture	/	Size	/	Mounting	/	Optics	/	Ballast	/	Voltage	/	Lens	/	Color	/	Option
DK2	/	20	/	CA	/	V5	/	100PSMH	/	120	/	CG	/	CY	/	-
Dockside 2 Fixture		20		Cross Arm		Vertical Type 5		100 Watt Pulse Start Metal Halide		120 Volts		Clear Glass		Clay		-

Fixture Ordering Form:

1	2	3	4	5	6	7	8	9	9	9
Fixture	Size	Mounting	Optics	Lamp	Voltage	Lens	Color	Option	Option	Option
1	2	3	4	5	6	7	8	9	9	9

1. DK2 / / / / / / / / / /



Specifications

Fixture Housing: One-piece sand-cast ballast housing with a spun aluminum shade. Housing shall be corrosion resistant cast aluminum alloy #A356. The housing shall be free of any foreign materials or cosmetic fillers.

Optics: The lamp shall be an open, type 5 output. Also available with house side shield option that is fully rotatable on site.

Electrical Module: All electrical components are UL and CSA recognized, mounted on a single plate, and factory prewired. An optional quick-disconnect plug for the ballast module is standard. *Reference pages 2 and 3 for lamp characteristics, ballast types, and voltage technical data.*

Lens: Lens shall be a borosilicate glass jelly jar. Removable for re-lamping. Available in a clear or frosted finish.

Finish/Color: Finish is super TGIC thermoset polyester powder coat paint. ELA offers RAL color matches along with our standard color selection. Custom and hand applied colors are available upon special request.


Certification: Fixtures shall be listed for outdoor, wet location. UL1598. IP rating 44.

CAUTION: Fixtures must be grounded in accordance with national, state, and/or local codes. Failure to do so may result in serious personal injury.

ELA RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Elevated Scale

Suggested Poles and Arms
for the Dockside 2 Fixture

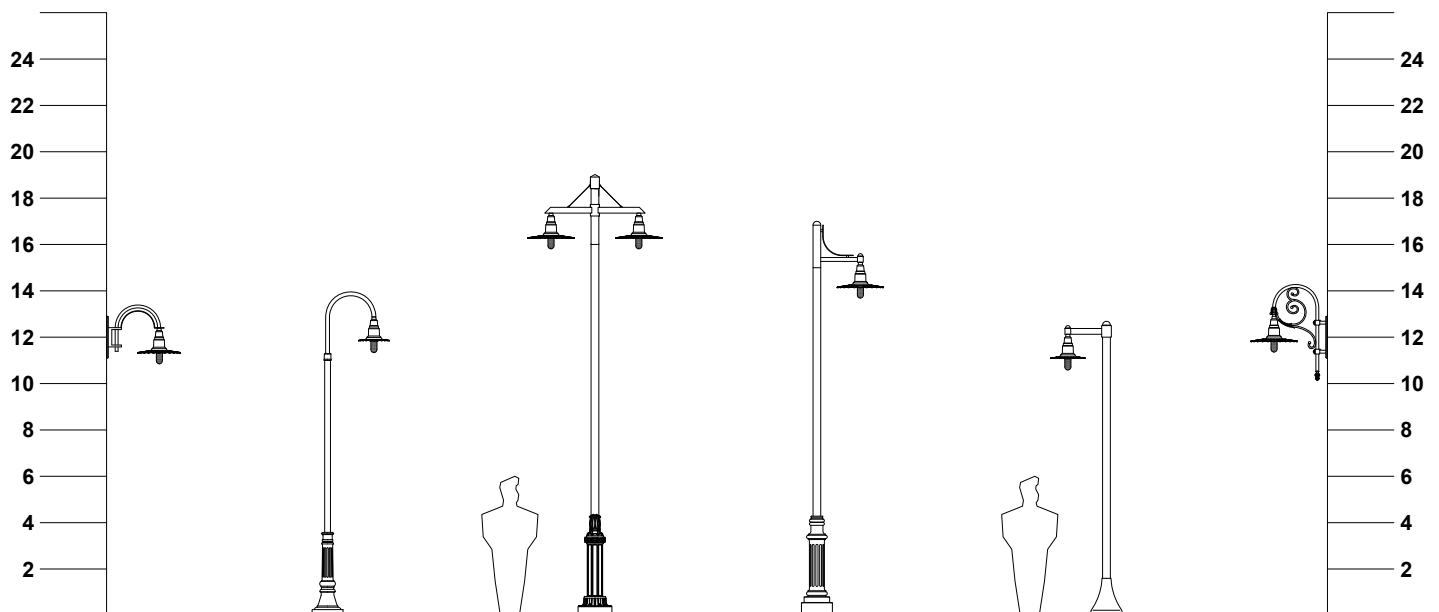

Note: Modifications to the fixture and additional pole heights are available.