



Project Name:
Type:

Environmental Lighting for Architecture, Inc.

Bollard - BOL3051

Ordering Matrix

1	2	3	4	5	6	7	8	9												
BOL3051	/		/		/		/		/		/		/		/		/		/	

BOL3051

The BOL3051 bollard can be specified with or without a light source. As a lighted bollard the BOL3051 is available with up to 65 watts of LED, which produces 5659 lumens, is available in Type V or Type III distribution. Other light sources are also available. The standard lighted BOL3051 has lenses in both the top and bottom, but it can be specified to have lenses in just the bottom or just the top. As a standard lighted bollard or modified as a security bollard, the BOL3051 is used many times to light sidewalks, walkways at schools and universities, outdoor shopping malls, parks, parking lot, government buildings, and much more.



Bollard is "Buy America Act" Compliant Proudly Made in the U.S.A.



Project Name:
Type:

Bollard - BOL3051

Ordering Matrix

Environmental Lighting for Architecture, Inc.

1	2	3	4	5	6	7	8	9
BOL3051								

1. Fixture:

Matrix #:	Description:
BOL3051	Aluminum Body Bollard


2. Size:

Matrix #:	Description:
42	42" Overall Height

3. Distribution:

Matrix #:	Description:
V3*	Type 3 - Vertical
V5	Type 5 - Vertical

* Distribution direction is field adjustable

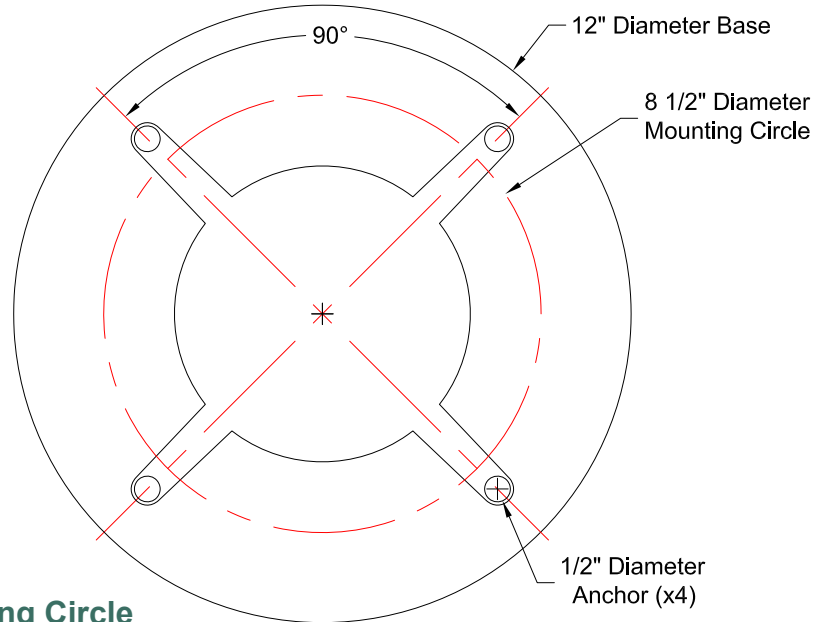

Mounting Circle

4. Lamping:

Matrix #:	Wattage*	Description:	Lumens
15LED	15 Watts	LED Tape (4.4w/ft)	1306
25LED	25 Watts	LED Tape (4.4w/ft)	2176
40LED	40 Watts	LED Tape (4.4w/ft)	3482
65LED	65 Watts	LED Tape (4.4w/ft)	5659
INC	100W Max.	Medium Base Socket	
HID*	100W Max.	Contact Factory for Details	
NL	-----	Non-Lit: Solid Flutes	

1) Dimming options available upon request.

*Other wattages & lumens available upon request.

5. Color Temps (k):

Matrix #:	Description:
AM*	Amber Color Temp
27	2700k Color Temp
30	3000k Color Temp
40	4000k Color Temp
50	5000k Color Temp

Note: Other color temperatures & RGB's available upon request.

*Amber not available in corn cobs.

6. Voltage:

Matrix #:	Description:
120	120VAC
208	208VAC
240	240VAC
277	277VAC
347*	347VAC
480*	480VAC

*Contact ELA for details.

7. Lens:

Matrix #:	Description:
CA	Clear Acrylic
CP	Clear Polycarbonate
FA	Frosted Acrylic
FP	Frosted Polycarbonate
OA	Opal Acrylic

8. Body Finish:

(Standard Powder Coat)

Matrix #:	Description:
AG	Augustine Green
CC	Charcoal
DB	Dark Bronze
GY	Architectural Grey
MG	Malaga Green
MN	Black - Midnight
PW	Pewter
SB	Statuary Bronze
VL	Village Green
WH	White

Note: Custom colors available upon request.

9. Options:

Matrix #:	Description:
BBU*	Battery Backup
PCB	Photocell Button
HSS	House Side Shield
SB**	Security Bollard

1. BBU test button location shall have visibility for testing on site. Consult factory for placement location.

2. BBU LED lumen output reduced in BBU mode.

3. Consult factory for Security Bollard options.

ELA Warranty Info:

Environmental Lighting for Architecture, Inc. (ELA) offers a Five (5) Year Warranty on all products exclusively manufactured by ELA. Furthermore, ELA offers a Five (5) Year Warranty on all LED and LED components; and guarantees that no fewer than 90% of the diodes in each fixture will still be operating during this time. Please contact ELA for the details of each warranty.