

Project Name:
Type:

Environmental Lighting for Architecture, Inc.


## Bollard - BOL3017

### Ordering Matrix


1	2	3	4	5	6	7	8	9
BOL3017								

# BOL3017

The BOL3017 bollard can be specified with or without a light source. As a lighted bollard the BOL3017 is available with up to 75 watts of LED, which generates 6530 lumens, is available in Type V or Type III distribution, and can be provided with several LED color temperatures to choose from. Other light sources are also available. The cast aluminum BOL3017 is built to withstand all weather conditions. As a standard lighted bollard or modified as a security bollard, the BOL3017 is the perfect solution to light sidewalks; or all walkways at schools and universities, outdoor shopping malls, parks, and much more.

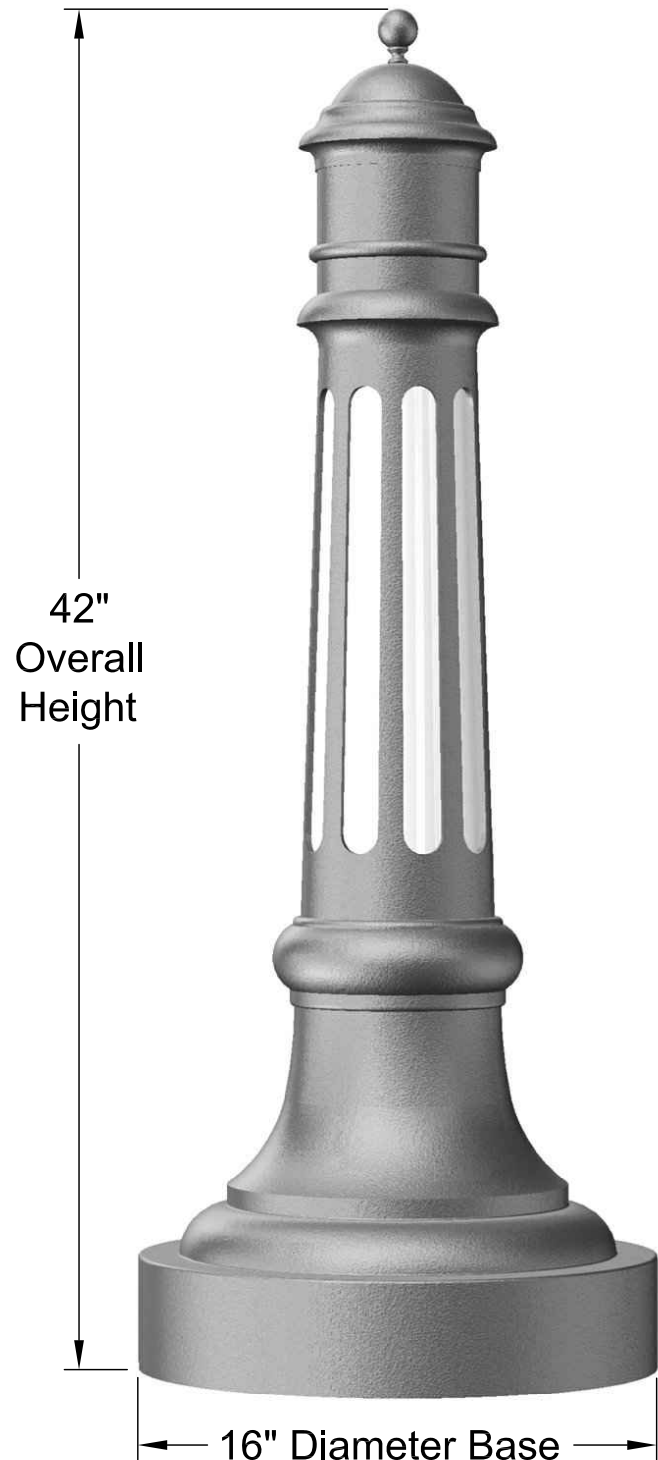

Bollard is "Buy America Act" Compliant Proudly Made in the U.S.A.

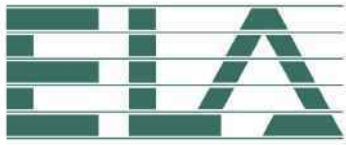

Project Name:
Type:

# Bollard - BOL3017

## Ordering Matrix

Environmental Lighting for Architecture, Inc.

1	2	3	4	5	6	7	8	9
<b>BOL3017</b>								

### 1. Fixture:


**Matrix #:** **BOL3017**  
**Description:** Aluminum Body Bollard

### 2. Size:

**Matrix #:** **42**  
**Description:** 42" Overall Height

### 3. Distribution:

**Matrix #:** **V3\***  
**Description:** Type 3 - Vertical  
**V5** Type 5 - Vertical

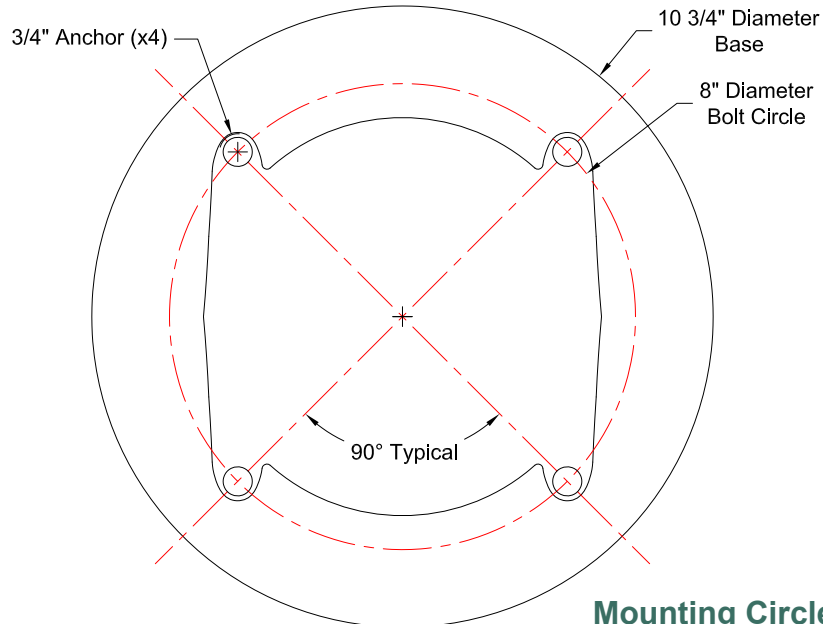

\* Distribution direction is field adjustable

### Mounting Circle

4. Lamping:	Matrix #:	Wattage*	Description:	Lumens
	<b>15LED</b>	15 Watts	LED Tape (4.4w/ft)	1306
	<b>25LED</b>	25 Watts	LED Tape (4.4w/ft)	2176
	<b>40LED</b>	40 Watts	LED Tape (4.4w/ft)	3482
	<b>65LED</b>	65 Watts	LED Tape (4.4w/ft)	5659
	<b>75LED</b>	75 Watts	LED Tape (4.4w/ft)	6530
	<b>INC</b>	100W Max.	Medium Base Socket	
	<b>HID*</b>	100W Max.	Contact Factory for Details	
	<b>NL</b>	-----	Non-Lit: Solid Flutes	

1) Dimming options available upon request.  
 \*Other wattages & lumens available upon request.

5. Color Temps (k):	Matrix #:	Description:
	<b>AM*</b>	Amber Color Temp
	<b>27</b>	2700k Color Temp
	<b>30</b>	3000k Color Temp
	<b>40</b>	4000k Color Temp
	<b>50</b>	5000k Color Temp

Note:  
 Other color temperatures & RGB's available upon request.  
 \*Amber not available in corn cobs.

6. Voltage:	Matrix #:	Description:
	<b>120</b>	120VAC
	<b>208</b>	208VAC
	<b>240</b>	240VAC
	<b>277</b>	277VAC
	<b>347*</b>	347VAC
	<b>480*</b>	480VAC

\*Contact ELA for details.

7. Lens:	Matrix #:	Description:
	<b>CA</b>	Clear Acrylic
	<b>CP</b>	Clear Polycarbonate
	<b>FA</b>	Frosted Acrylic
	<b>FP</b>	Frosted Polycarbonate
	<b>OA</b>	Opal Acrylic

8. Body Finish:	Matrix #:	Description:
(Standard Powder Coat)	<b>AG</b>	Augustine Green
	<b>CC</b>	Charcoal
	<b>DB</b>	Dark Bronze
	<b>GY</b>	Architectural Grey
	<b>MG</b>	Malaga Green
	<b>MN</b>	Black - Midnight
	<b>PW</b>	Pewter
	<b>SB</b>	Statuary Bronze
	<b>VL</b>	Village Green
	<b>WH</b>	White

Note: Custom colors available upon request.

9. Options:	Matrix #:	Description:
	<b>BBU*</b>	Battery Backup
	<b>PCB</b>	Photocell Button
	<b>HSS</b>	House Side Shield
	<b>SB**</b>	Security Bollard

1. BBU test button location shall have visibility for testing on site. Consult factory for placement location.  
 2. BBU LED lumen output reduced in BBU mode.  
 3. Consult factory for Security Bollard options.

**ELA Warranty Info:** Environmental Lighting for Architecture, Inc. (ELA) offers a Five (5) Year Warranty on all products exclusively manufactured by ELA. Furthermore, ELA offers a Five (5) Year Warranty on all LED and LED components; and guarantees that no fewer than 90% of the diodes in each fixture will still be operating during this time. Please contact ELA for the details of each warranty.