



Project Name:
Type:

Environmental Lighting for Architecture, Inc.

Mediterranean - MED

LED Ordering Matrix

Mediterranean

The Mediterranean is a traditional six-sided fixture. Though several other sources offer a similar product, the Mediterranean was originally designed and introduced by ELA. The Mediterranean is a legacy and continues to be among ELA's best sellers in our traditional line of products. The Mediterranean has been installed in a multitude of sites throughout the United States, Canada and the world; including shopping malls, parking lots, government buildings, schools, libraries and many others. The Mediterranean is also often used for decorative street lighting and walk-way lighting. With its classic traditional style, superior quality and durability, and high performance standards; the Mediterranean is a perfect solution to many lighting applications.



Fixture is "Buy America Act" Compliant Proudly Made in the U.S.A.



Project Name: _____

Type: _____

Mediterranean - MED

LED Ordering Matrix



Environmental Lighting for Architecture, Inc.

1 **MED** / 2 / 3 / 4 / 5 / 6 / 7 / 8 / 9 / 10

1. Fixture: Matrix #: **MED** Description: Mediterranean Fixture

2. Size: Matrix #: **11** 10 lbs. 1.0
14 18 lbs. 1.6
17 30 lbs. 2.3
19 40 lbs. 3.0

MED/11
Horizontal Max: 69w
Vertical Max: 54w




MED/14
Horizontal Max: 95w
Vertical Max: 120w

3. Mounting: Matrix #: **CR*** Crossarm
PT* Post Top
BR* Wall Bracket
CP Chain Pendant
SP Stem Pendant

*Specify which Crossarm, Pole, or Wall Bracket is to be used. See ELA website for choices.

4. Distribution: Matrix #: **H2** Type 2 - Horizontal
H3 Type 3 - Horizontal
H4 Type 4 - Horizontal
H5 Type 5 - Horizontal
Horizontal
V3 Type 3 - Vertical (Corn Cob)
V5 Type 5 - Vertical (Corn Cob)
Vertical

MED/17
Horizontal Max: 95w
Vertical Max: 120w

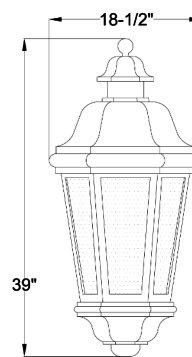

MED/19
Horizontal Max: 135w
Vertical Max: 120w

Elevation Views
4 Fixtures

5. Lamping:	<u>Matrix #:</u>	<u>Description:</u>	<u>Diodes</u>	<u>Lumens*</u>	<u>Wattage*</u>	<u>Efficacy</u>	<u>LED Drive</u> (mA)	<u>Standard Dimming Type**</u>
	35LED	LED Board	24	3360	35	96	292	1-10VDC, Triac, Forward Phase
	69LED	LED Board	56	6624	69	96	575	1-10VDC, Triac, Forward Phase
	95LED	LED Board	198	9120	95	96	792	1-10VDC, Triac, Forward Phase
	101LED	LED Board	198	9696	101	96	842	1-10VDC, Triac, Forward Phase
	135LED	LED Board	198	12960	135	96	1125	1-10VDC, Triac, Forward Phase
Horizontal								
Vertical	27LED	LED Corn Cob	81	2970	27	110	225	Line Voltage On-Board Transformer
	45LED	LED Corn Cob	135	4950	45	110	375	Line Voltage On-Board Transformer
	80LED	LED Corn Cob	234	8800	80	110	667	Line Voltage On-Board Transformer
	120LED	LED Corn Cob	336	13200	120	110	1000	Line Voltage On-Board Transformer

*Other wattages & lumens available upon request.

**Other dimming types available upon request.

6. Color Temps (k): Matrix #: **AM*** Amber Color Temp
27 2700k Color Temp
30 3000k Color Temp
40 4000k Color Temp
50 5000k Color Temp

Note: Other color temperatures & RGB's available upon request.

*Amber not available in corn cobs.

7. Voltage: Matrix #: **120** 120VAC
208 208VAC
240 240VAC
277 277VAC
347* 347VAC
480* 480VAC

*Contact ELA for details.

8. Lens: Matrix #: **CG** Clear Tempered Glass
FG Frosted Tempered Glass
CB Clear Beveled Tempered Glass
FB Frosted Beveled Tempered Glass
CSG Clear Seedy Glass
CA Clear Acrylic
FA Frosted Acrylic
HCG Horizontal Clear Glass
HFG Horizontal Frosted Glass

9. Finish: Matrix #: **AG** Augustine Green
CC Charcoal
DB Dark Bronze
GY Architectural Grey
MG Malaga Green
MN Black - Midnight
PW Pewter
SB Statuary Bronze
VL Village Green
WH White

Note: Custom colors available upon request.

10. Options: Matrix #: **BBU** Battery Backup
PCB Photocell Button
TB Terminal Block
PCR3* 3 Pin Photo Control Receptacle
PCR5* 5 Pin Photo Control Receptacle
PCF7* 7 Pin Photo Control Receptacle
HSS House Side Shield

1. BBU test button location shall have visibility for testing on site. Consult factory for placement location.
2. BBU LED lumen output reduced in BBU mode.
3. ELA Can integrate client specified wifi /remote control components upon request.

* See ELA for mounting options.

ELA Warranty Info:

Environmental Lighting for Architecture, Inc. (ELA) offers a Five (5) Year Warranty on all products exclusively manufactured by ELA. Furthermore, ELA offers a Five (5) Year Warranty on all LED and LED components; and guarantees that no fewer than 90% of the diodes in each fixture will still be operating during this time. Please contact ELA for the details of each warranty.