

Project Name:
Type:

Environmental Lighting for Architecture, Inc.

Arcos - ARC


LED Ordering Matrix

Arcos

Arcos means Arches in Spanish, and that's what ELA has used to design this new classic wall sconce. Available with a selection of lenses, with or without a grill, the Arcos is a great choice for many applications that require an outdoor wall to be washed with light. The options of having a lens or closed top and/or bottom allows the Arcos to be specified with an up-light and/or down-light and/or a simple illumination through the front lens. Available in up to a maximum 75 watts in LED energy while still maintaining excellent light output. The Arcos offers unique contemporary styling, extraordinary durability, and an excellent choice for lighting the wall of any upscale structure.



Fixture is "Buy America Act" Compliant Proudly Made in the U.S.A.

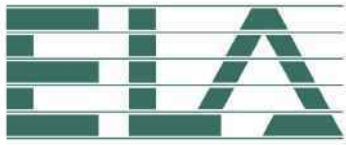

Project Name:
Type:

Arcos - ARC

LED Ordering Matrix

Environmental Lighting for Architecture, Inc.

1	2	3	4	5	6	7	8	9
ARC								

1. Fixture: Matrix #: **ARC** Description: Arcos Fixture

2. Size: Matrix #: **24** Weight: 30 lbs. EPA: 1.6

3. Mounting: Matrix #: **BR** Description: Wall Bracket


4. Distribution: Matrix #: **OP** Description: Illuminated Front, Top, and Bottom Ends

CT Illuminated Front and Bottom Ends and Closed Top End

CB Illuminated Front and Top Ends Closed Bottom End

CE Illuminated Front Closed Top and Bottom Ends

Note: Reflector is a painted white finish. Consult factory for custom options.

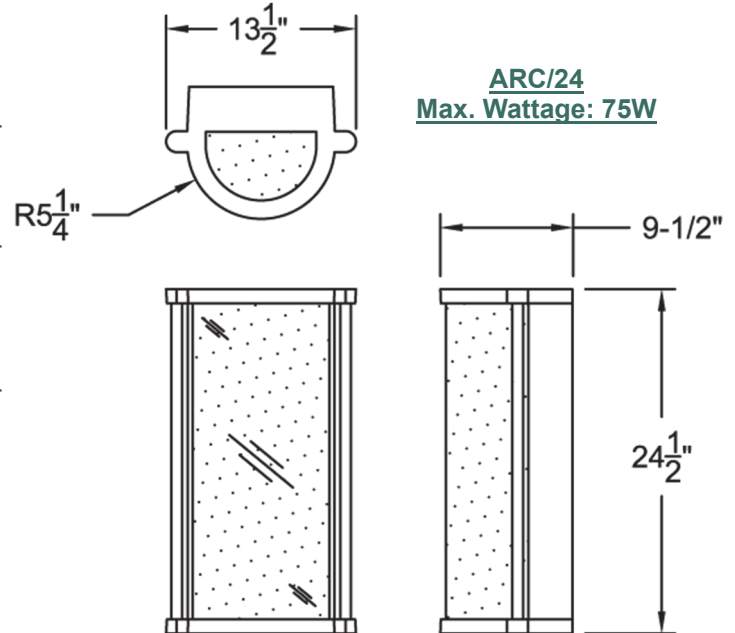

ARC/24
Max. Wattage: 75W

5. Lamping:	Matrix #:	Description:	Diodes	Lumens*	Wattage*	Efficacy	LED Drive (mA)	Standard Dimming Type**
	35LED	LED Board	24	3360	35	96	292	1-10VDC, Triac, Forward Phase
	50LED	LED Board	56	4800	50	96	417	1-10VDC, Triac, Forward Phase
	69LED	LED Board	56	6624	69	96	575	1-10VDC, Triac, Forward Phase
	75LED	LED Board	100	7200	75	96	625	1-10VDC, Triac, Forward Phase

1) Other wattages & lumens available upon request.

2) Other dimming types available upon request.

6. Color Temps (k):	Matrix #:	Description:
	AM*	Amber Color Temp
	27	2700k Color Temp
	30	3000k Color Temp
	40	4000k Color Temp
	50	5000k Color Temp

Note: Other color temperatures & RGB's available upon request.

*Amber not available in corn cobs.

7. Voltage:	Matrix #:	Description:
	120	120VAC
	208	208VAC
	240	240VAC
	277	277VAC
	347*	347VAC
	480*	480VAC

*Contact ELA for details.

8. Lens:	Matrix #:	Description:
	CA	Clear Acrylic
	FA	Frosted Acrylic
	OA	Opal Acrylic

9. Finish:	Matrix #:	Description:
(Standard Powder Coat)	AG	Augustine Green
	CC	Charcoal
	DB	Dark Bronze
	GY	Architectural Grey
	MG	Malaga Green
	MN	Black - Midnight
	PW	Pewter
	SB	Statuary Bronze
	VL	Village Green
	WH	White

Note: Custom colors available upon request.

10. Options:	Matrix #:	Description:
	BBU	Battery Backup
	PCB	Photocell Button
	TB	Terminal Block
	PCR3*	3 Pin Photo Control Receptacle
	PCR5*	5 Pin Photo Control Receptacle
	PCF7*	7 Pin Photo Control Receptacle
	HSS	House Side Shield

1. BBU test button location shall have visibility for testing on site. Consult factory for placement location.

2. BBU LED lumen output reduced in BBU mode.

3. ELA Can integrate client specified Wifi /remote control components upon request.

* See ELA for mounting options.

ELA Warranty Info: Environmental Lighting for Architecture, Inc. (ELA) offers a Five (5) Year Warranty on all products exclusively manufactured by ELA. Furthermore, ELA offers a Five (5) Year Warranty on all LED and LED components; and guarantees that no fewer than 90% of the diodes in each fixture will still be operating during this time. Please contact ELA for the details of each warranty.