


Project Name:	Type:
Notes:	Order Matrix Number:

Environmental Lighting for Architecture, Inc.


Cove 2

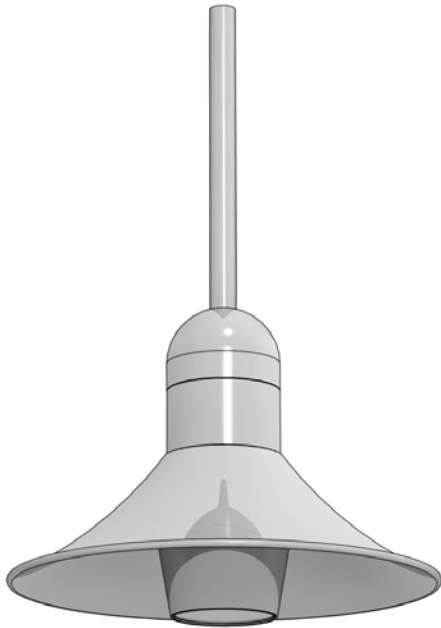

Available in five sizes of shades, up to 24" diameter, with a prismatic glass refractor, the *Cove 2* is an excellent performing outdoor pendant mounted fixture with a nostalgic style. Suitable for cross arm, pendant (chain, stem), or wall mounting conditions, the *Cove 2* is often specified for restaurants, shopping malls, court houses, museums, historical sites, government buildings, schools and universities, parking lots, site and walkway lighting, lighting for "Old Town" sections of cities, and much more.

Constructed of high grade cast and spun aluminum and finished with a powder-coated finish with the inside finished in white to maximize optics, the *Cove 2* is built to endure all outdoor conditions. The *Cove 2* is available in up to a maximum 150 watt Metal Halide or High Pressure Sodium and can also accommodate today's **Low-Energy** requirements with an assortment of CFL lamps up to 57 watts.

The *Cove 2* has everything you need: Style, durability, and excellent performance to meet many of today's lighting specifications.



Environmental Lighting for Architecture, Inc.


Ordering Matrix

Cove 2 - CE2

1	2	3	4	5	6	7	8	9
Fixture	Size	Mounting	Optics	Ballast	Voltage	Lens	Color	Option
CE2	20	CA	V5	100PSMH	120	CG	CY	--

1. Fixture: CE2

2. Size

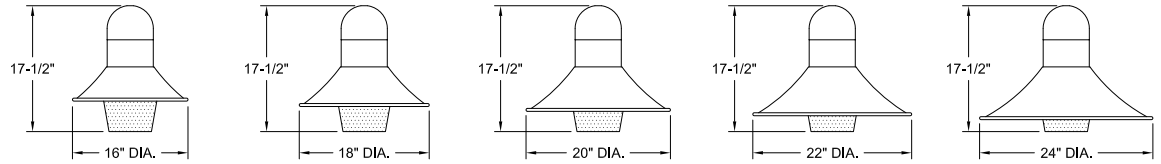


Matrix #:
Description:
Notes:
EPA:
Weight:

16	18	20	22	24
Max Wattage 150W 0.9 23 lbs.	Max Wattage 150W 1.0 24 lbs.	Max Wattage 150W 1.0 25 lbs.	Max Wattage 150W 1.1 26 lbs.	Max Wattage 150W 1.1 27 lbs.


3. Mounting

Notes:
1. Please consult factory for other mounting options.


Matrix #:
Description:




CA
Cross Arm



CP
Chain Pendant




SP
Stem Pendant



WB
Wall Bracket

4. Optics

Vertical



Matrix #:
Description:



V3
TYPE 3



V5
TYPE 5

5. Ballast

Description: Incandescent
(Watts / Type)
Matrix #: INC














Pulse Start
Metal Halide
(Watts / Type)
50PSMH
70PSMH
100PSMH
150PSMH

Metal Halide
(Watts / Type)
50MH
70MH
T6 70MH
100MH
T6 150MH
150MH


High Pressure
Sodium
(Watts / Type)
50HPS
70HPS
100HPS
150HPS

Compact
Fluorescent
(Watts / Type)
13CFL
18CFL
26CFL
32CFL
42CFL
57CFL

Notes:
1. Electronic ballast available for 50, 70, and 100 watt MH lamps.
2. Other wattages available. Consult factory.

<div>6. Voltage</div>	<table><tr><td>Matrix #:</td><td>120</td><td>208</td><td>240</td><td>277</td><td>347</td><td>480</td></tr><tr><td>Description:</td><td>120V</td><td>208V</td><td>240V</td><td>277V</td><td>347V</td><td>480V</td></tr></table>	Matrix #:	120	208	240	277	347	480	Description:	120V	208V	240V	277V	347V	480V																						
Matrix #:	120	208	240	277	347	480																															
Description:	120V	208V	240V	277V	347V	480V																															
<div>7. Lens</div> <div>Notes: Consult factory for custom lens.</div>	<div></div> <div>Matrix #: Description:</div> <div>CG Clear Glass Refractor</div>																																				
<div>8. Color</div> <div>Notes: Consult factory for custom colors.</div>	<table><tr><th colspan="2">Powder Coat Finish</th><th colspan="2">Hand-Applied Finish</th></tr><tr><th>Matrix #</th><th>Description</th><th>Matrix #</th><th>Description</th></tr><tr><td>AG</td><td>Augustine Green</td><td>MG</td><td>Malaga Green</td></tr><tr><td>GY</td><td>Architectural Grey</td><td>MN</td><td>Midnight</td></tr><tr><td>CC</td><td>Charcoal</td><td>PW</td><td>Pewter</td></tr><tr><td>CY</td><td>Clay</td><td>SS</td><td>Sand Storm</td></tr><tr><td>DB</td><td>Dark Bronze</td><td>SB</td><td>Statuary Bronze</td></tr><tr><td>HR</td><td>Harbor Blue</td><td>VL</td><td>Village Green</td></tr><tr><td>HP</td><td>Hammered Pewter</td><td>W</td><td>White</td></tr></table>	Powder Coat Finish		Hand-Applied Finish		Matrix #	Description	Matrix #	Description	AG	Augustine Green	MG	Malaga Green	GY	Architectural Grey	MN	Midnight	CC	Charcoal	PW	Pewter	CY	Clay	SS	Sand Storm	DB	Dark Bronze	SB	Statuary Bronze	HR	Harbor Blue	VL	Village Green	HP	Hammered Pewter	W	White
Powder Coat Finish		Hand-Applied Finish																																			
Matrix #	Description	Matrix #	Description																																		
AG	Augustine Green	MG	Malaga Green																																		
GY	Architectural Grey	MN	Midnight																																		
CC	Charcoal	PW	Pewter																																		
CY	Clay	SS	Sand Storm																																		
DB	Dark Bronze	SB	Statuary Bronze																																		
HR	Harbor Blue	VL	Village Green																																		
HP	Hammered Pewter	W	White																																		
<div>9. Options</div> <div>Notes: 1. BBU option is available for fluorescent lamp only. 2. Test button location shall have visibility for testing on site. Consult factory for placement location.</div> <div>Photocell Options: Photocell is available in 120 thru 480 volts. Consult factory. Specify when ordering.</div>	<table><tr><td><div></div><div>BBU Battery Backup</div></td><td><div></div><div>TB Terminal Block</div></td><td><div></div><div>PCB Photocell Button</div></td><td><div></div><div>HSS House Side Shield</div></td></tr></table>	<div></div> <div>BBU Battery Backup</div>	<div></div> <div>TB Terminal Block</div>	<div></div> <div>PCB Photocell Button</div>	<div></div> <div>HSS House Side Shield</div>																																
<div></div> <div>BBU Battery Backup</div>	<div></div> <div>TB Terminal Block</div>	<div></div> <div>PCB Photocell Button</div>	<div></div> <div>HSS House Side Shield</div>																																		

Fixture Ordering Example:




CE2/20/CA/V5/100PSMH/120/CG/CY

1	2	3	4	5	6	7	8	9								
Fixture	/	Size	/	Mounting	/	Optics	/	Ballast	/	Voltage	/	Lens	/	Color	/	Option
CE2	/	20	/	CA	/	V5	/	100PSMH	/	120	/	CG	/	CY	/	-
Cove 2 Fixture		20		Cross Arm		Vertical Type 5		100 Watt Pulse Start Metal Halide		120 Volts		Clear Glass Refractor		Clay		-

Fixture Ordering Form:

1	2	3	4	5	6	7	8	9	9	9
Fixture	Size	Mounting	Optics	Lamp	Voltage	Lens	Color	Option	Option	Option
1	2	3	4	5	6	7	8	9	9	9

1. CE2 / / / / / / / / / /



Specifications

Fixture Housing: One-piece sand-cast ballast housing with a spun aluminum shade. Housing shall be corrosion resistant cast aluminum alloy #A356. The housing shall be free of any foreign materials or cosmetic fillers.

Optics: Unit shall utilize borosilicate prismatic glass refractor. Fully rotatable on site.

Electrical Module: All electrical components are UL and CSA recognized, mounted on a single plate, and factory prewired. An optional quick-disconnect plug for the ballast module is standard. *Reference pages 2 and 3 for lamp characteristics, ballast types, and voltage technical data.*

Lens: Lens shall be a clear borosilicate prismatic glass refractor. Removable for re-lamping.

Finish/Color: Finish is super TGIC thermoset polyester powder coat paint. ELA offers RAL color matches along with our standard color selection. Custom and hand applied colors are available upon special request.


Certification: Fixtures shall be listed for outdoor, wet location. UL1598. IP rating 44.

CAUTION: Fixtures must be grounded in accordance with national, state, and/or local codes. Failure to do so may result in serious personal injury.

ELA RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Elevated Scale

Suggested Poles and Arms
for the Cove 2 Fixture

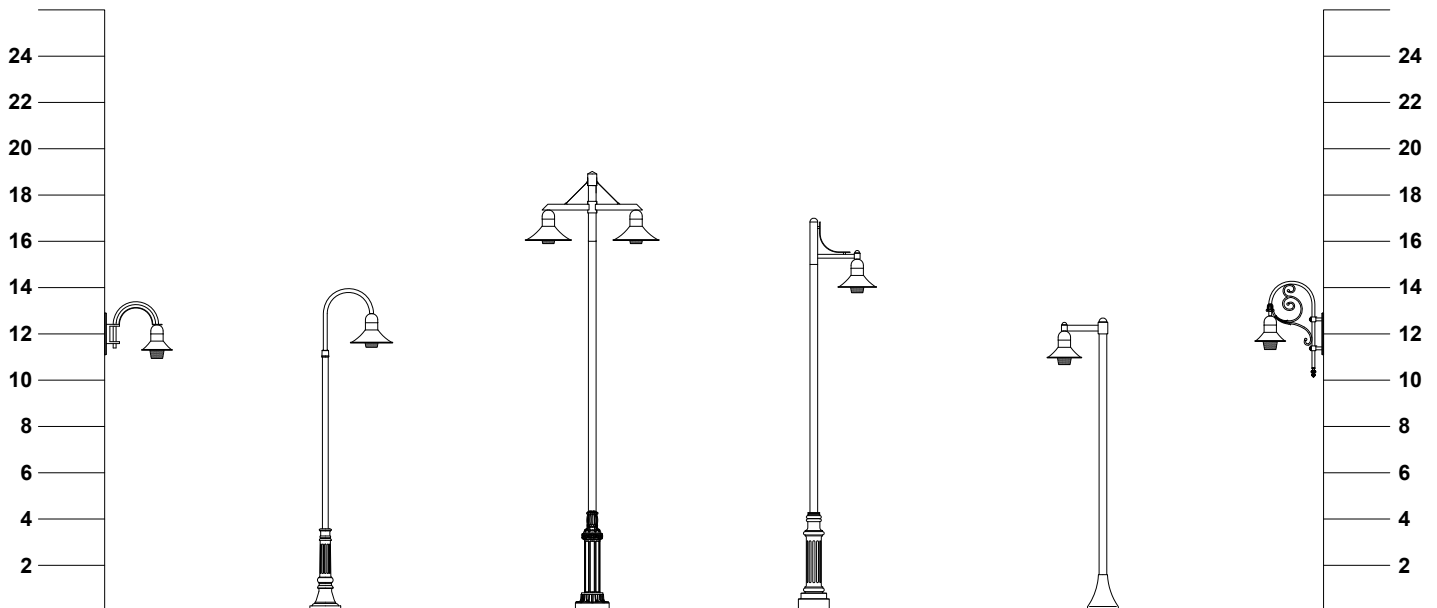

Fixture :	CE2/16/WB	CE2/20/CA	CE2/24/CA	CE2/20/CA	CE2/18/CA	CE2/16/WB
Arm :	BR14	CR17A	CR21B	CR111A	CR112A	BR16
Pole:		P3016A-12'	P3025B-16'	P3042B-14'	P4014B-12'	
Options :						

Note: Modifications to the fixture and additional pole heights are available.