



Project Name:
Type:


Environmental Lighting for Architecture, Inc.

Ambassador - AMB

HID Ordering Matrix

Ambassador

The Ambassador is a traditional six-sided fixture. The Ambassador has been installed in a multitude of sites throughout the United States, Canada and the world; including shopping malls, parking lots, government buildings, schools, libraries and many others. Available in two sizes, the Ambassador is available in up to 150 watts in HID. With its classic traditional style, superior quality and durability, and high performance standards; the Ambassador is a perfect solution to many lighting applications.

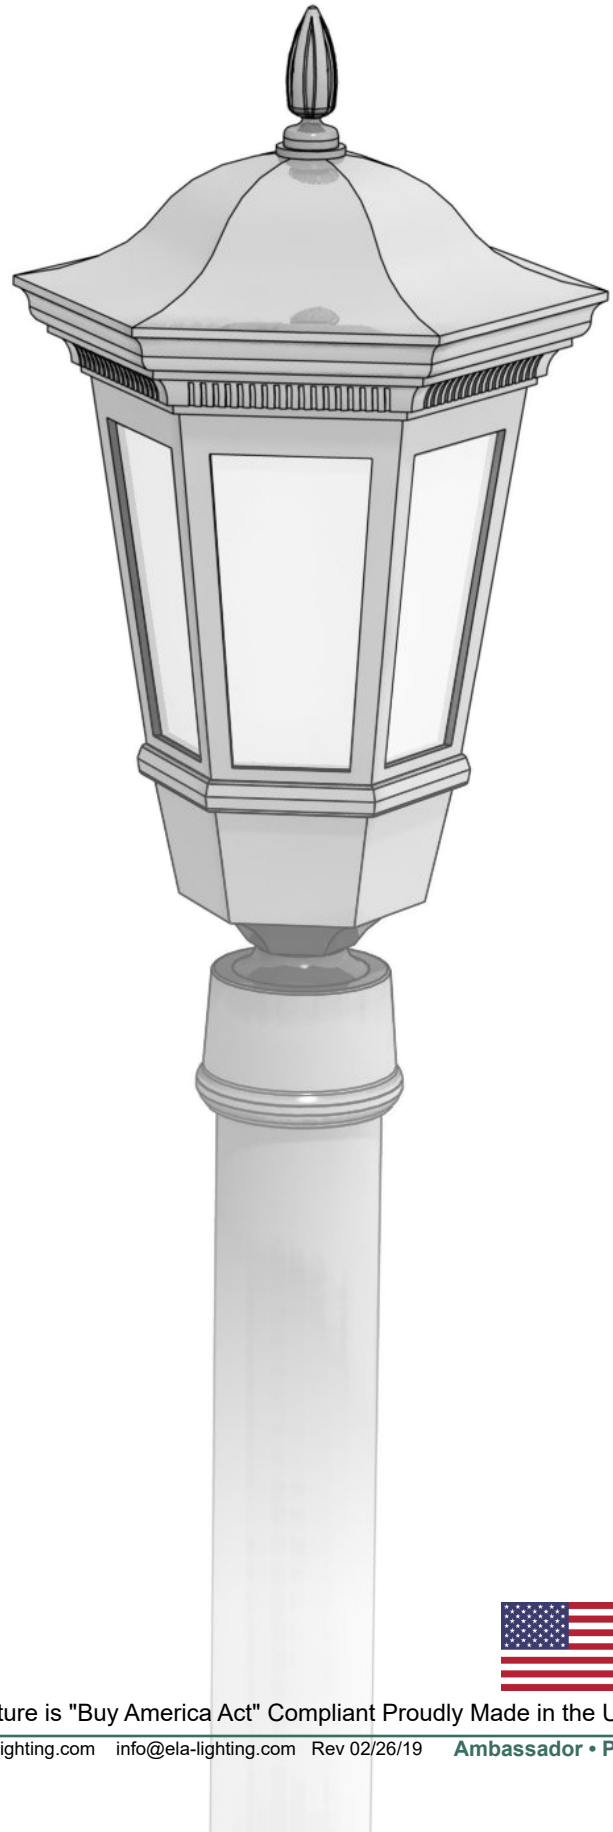

Fixture is "Buy America Act" Compliant Proudly Made in the U.S.A.



Project Name: _____
 Type: _____

Ambassador - AMB HID Ordering Matrix

Environmental Lighting for Architecture, Inc.

1 **AMB** / 2 / 3 / 4 / 5 / 6 / 7 / 8 / 9

1. Fixture: Matrix #: **AMB** Description: Ambassador Fixture



2. Size: Matrix #: **11** Weight: 17 lbs. EPA: 0.8
Matrix #: **15** Weight: 22 lbs. EPA: 1.3

3. Mounting: Matrix #: **CR*** Description: Cross Arm
PT* Description: Post Top
BR* Description: Wall Bracket
CP Description: Chain Pendant
SP Description: Stem Pendant


*Specify which Cross Arm, or Wall Bracket is to be used. See ELA website for choices.

4. Distribution: Matrix #: Description:
 Horizontal **H3** Type 3 - Horizontal
H5 Type 5 - Horizontal
 Vertical **V3*** Type 3 - Vertical
V5 Type 5 - Vertical

* Glass refractor required.

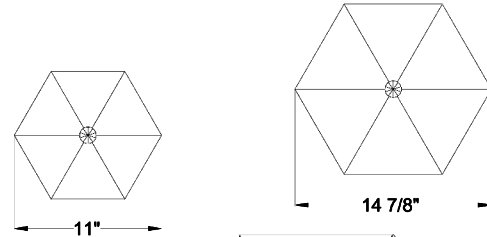

AMB/11
Horizontal Max: 50W
Vertical Max: 70W



AMB/15
Horizontal Max: 150W
Vertical Max: 150W

5. Lamping: Description: Pulse Start Metal Halide (Watts/Type)
Matrix #: **50PSMH**
70PSMH
100PSMH*
150PSMH*

* Size 15 ONLY

1. Electronic ballast available for 50, 70, 100, and 150 watt MH lamps.

2. Other wattages and ballasts available. Consult factory.

Description: Metal Halide (Watts/Type)
Matrix #: **T6 30MH**
50MH
70MH
T6 70MH
100MH*
150MH*
T6 150MH*

Description: High Pressure Sodium (Watts/Type)
Matrix #: **50HPS**
70HPS
100HPS*
150HPS*

Description: Incandescent
Matrix #: **INC***
 *Note: Incandescent socket supplied will be E26 Medium-Base (suitable for lamping by others), unless otherwise specified.

6. Voltage: Matrix #: **120** Description: 120VAC
208 208VAC
240 240VAC
277 277VAC
347 347VAC
480 480VAC

7. Lens: Matrix #: Description:
CG Clear Glass
CA* Clear Acrylic
CP* Clear Polycarbonate
FG Frosted Glass
FA* Frosted Acrylic
FP* Frosted Polycarbonate
OG Opal Glass
OA* Opal Acrylic
SG Seedy Glass
SA* Seedy Acrylic

* Max wattage 50w.

8. Finish: (Standard Powder Coat) Matrix #: Description:
AG Augustine Green
CC Charcoal
DB Dark Bronze
GY Architectural Grey
MG Malaga Green
MN Black - Midnight
PW Pewter
SB Statuary Bronze
VL Village Green
WH White

Note: Custom colors available upon request.

9. Options: Matrix #: Description:
BBU Battery Backup
PCB Photocell Button
TB Terminal Block
PCR3* 3 Pin Photo Control Receptacle
PCR5* 5 Pin Photo Control Receptacle
PCF7* 7 Pin Photo Control Receptacle
HSS House Side Shield

1. BBU test button location shall have visibility for testing on site. Consult factory for placement location.

2. ELA Can integrate client specified Wifi /remote control components upon request.

* See ELA for mounting options.

ELA Warranty Info: Environmental Lighting for Architecture, Inc. (ELA) offers a Five (5) Year Warranty on all products exclusively manufactured by ELA. Furthermore, ELA offers a Five (5) Year Warranty on all LED and LED components; and guarantees that no fewer than 90% of the diodes in each fixture will still be operating during this time. Please contact ELA for the details of each warranty.t