




Project Name:
Type:

Environmental Lighting for Architecture, Inc.

# Boardwalk - BRD HID Ordering Matrix

## Boardwalk Boardwalk

The Boardwalk offers a traditional mission bell look with a fluted fitter, while being able to operate at today's high performance and low energy lighting standards. Available in two sizes, the Boardwalk fixture produces maximum downlight with full cut-off optics and can be provided with up to 400 watts of HID power. Suitable for cross arm, pendant and wall mounted specifications; the Boardwalk is the perfect solution to light streets, historical sites, government buildings, schools and universities, parking lots, site and walkway lighting, and much more.

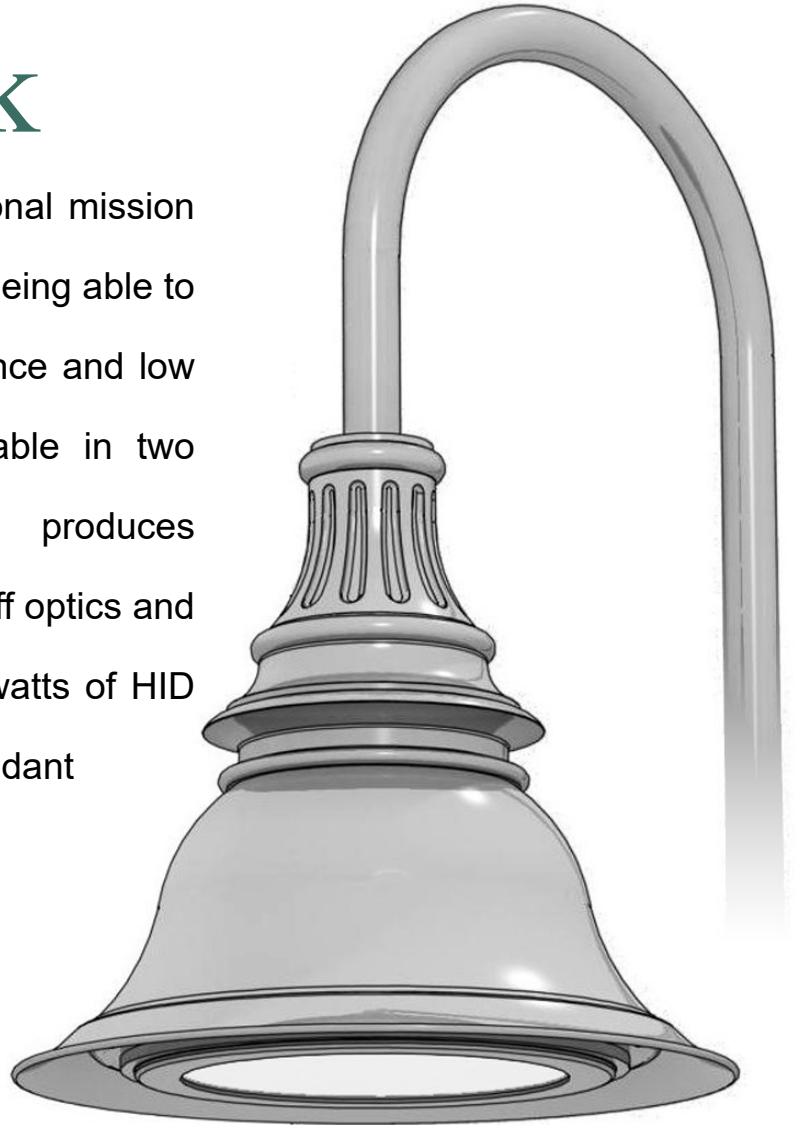

Fixture is "Buy America Act" Compliant Proudly made in the U.S.A.



Project Name:
Type:

# Boardwalk - BRD HID Ordering Matrix

Environmental Lighting for Architecture, Inc.

1	2	3	4	5	6	7	8	9
<b>BRD</b>								

**1. Fixture:**      Matrix #:      Description:  
**BRD**                      Boardwalk Fixture


**2. Size:**                      Matrix #:                      Weight:                      EPA:  
**22**                                      24 lbs.                      0.9  
**30**                                      32 lbs.                      1.6

**3. Mounting:**                      Matrix #:                      Description:  
**CR\***                                      Cross Arm  
**BR\***                                      Wall Bracket  
**CP**                                      Chain Pendant  
**SP**                                      Stem Pendant

\*Specify which Cross Arm, Pole, or Wall Bracket is to be used. See ELA website for choices.

**4. Optics:**                      Matrix #:                      Description:

Horizontal	<b>H2</b>	Type 2 - Horizontal
	<b>H3</b>	Type 3 - Horizontal
	<b>H4</b>	Type 4 - Horizontal
	<b>H5</b>	Type 5 - Horizontal
Vertical	<b>V3</b>	Type 3 - Vertical
	<b>V5</b>	Type 5 - Vertical

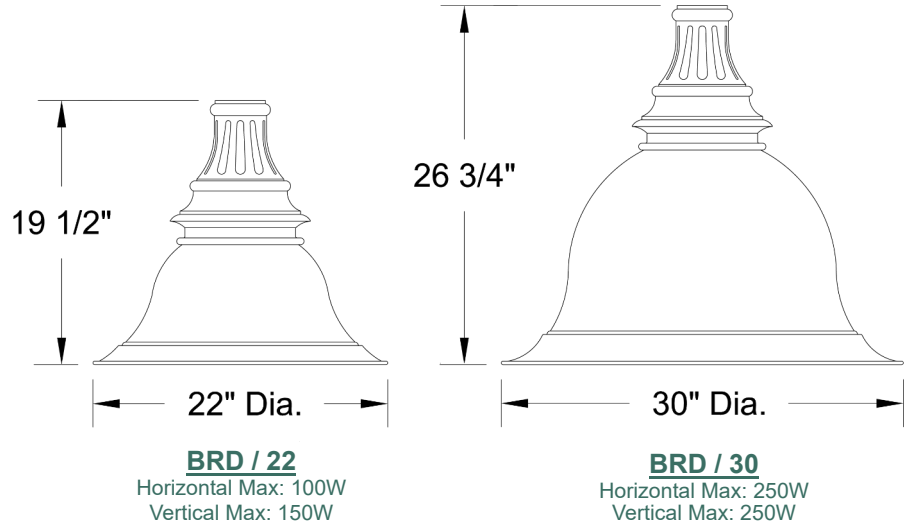

<b>5. Ballast:</b>	<u>Description:</u> Pulse Start Metal Halide (Watts/Type)	<u>Description:</u> Metal Halide (Watts/Type)	<u>Description:</u> High Pressure Sodium (Watts/Type)	<u>Description:</u> Incandescent
	<u>Matrix #:</u> <b>50PSMH</b> <b>70PSMH</b> <b>100PSMH</b> <b>150PSMH</b> <b>175PSMH</b> <b>200PSMH*</b> <b>250PSMH*</b> <b>320PSMH*</b> <b>350PSMH*</b> <b>400PSMH*</b>	<u>Matrix #:</u> <b>50MH</b> <b>70MH</b> <b>T6 70MH</b> <b>100MH</b> <b>T6 150MH</b>	<u>Matrix #:</u> <b>50HPS</b> <b>70HPS</b> <b>100HPS</b> <b>150HPS</b> <b>200HPS*</b> <b>250HPS*t</b>	<u>Matrix #:</u> <b>INC*</b>

1. Electronic ballast available for 50, 70, 100, and 150 watt MH lamps.  
2. Other wattages and ballasts available. Consult factory.  
\* Only fits BEL/30.

\*Note: Incandescent socket supplied will be E26 Medium-Base (suitable for lamping by others), unless otherwise specified.

**6. Voltage:**                      Matrix #:                      Description:  
**120**                                      120VAC  
**208**                                      208VAC  
**240**                                      240VAC  
**277**                                      277VAC  
**347**                                      347VAC  
**480**                                      480VAC

**7. Lens:**                      Matrix #:                      Description:  
**CG\***                                      Clear Tempered Glass  
**FG\***                                      Frosted Tempered Glass

\*Full Cut-Off Compliant.

**9. Options:**                      Matrix #:                      Description:  
**BBU**                                      Battery Backup  
**PCB**                                      Photocell Button  
**TB**                                      Terminal Block  
**PCR3\***                                      3 Pin Photo Control Receptacle  
**PCR5\***                                      5 Pin Photo Control Receptacle  
**PCF7\***                                      7 Pin Photo Control Receptacle  
**HSS**                                      House Side Shield

1. BBU test button location shall have visibility for testing on site. Consult factory for placement location.  
2. ELA Can integrate client specified wifi /remote control components upon request.  
\* See ELA for mounting options.

**8. Finish:**                      Matrix #:                      Description:  
(Standard Powder Coat)  
**AG**                                      Augustine Green  
**CC**                                      Charcoal  
**DB**                                      Dark Bronze  
**GY**                                      Architectural Grey  
**MG**                                      Malaga Green  
**MN**                                      Black - Midnight  
**PW**                                      Pewter  
**SB**                                      Statuary Bronze  
**VL**                                      Village Green  
**WH**                                      White

Note: Custom colors available upon request.

**ELA Warranty Info:**      Environmental Lighting for Architecture, Inc. (ELA) offers a Five (5) Year Warranty on all products exclusively manufactured by ELA. Furthermore, ELA offers a Five (5) Year Warranty on all LED and LED components; and guarantees that no fewer than 90% of the diodes in each fixture will still be operating during this time. Please contact ELA for the details of each warranty.a