



Project Name:
Type:

Environmental Lighting for Architecture, Inc.

Luxor - LUX

LED Ordering Matrix

Luxor

Named after the fabled Egyptian city, the Luxor ELA has created a design that is a new classic wall sconce. Available with a selection of lenses, with or without a grill, the Luxor is a great choice for many applications that require an outdoor wall to be washed with light. The options of having a lens or closed top and/or bottom allows the Luxor to be specified with an up-light and/or down-light and/or a simple illumination through the front lens. Available in up to a maximum 75 watts in LED energy while still maintaining excellent light output. The Luxor offers unique and contemporary styling, extraordinary durability, and an excellent choice for lighting the wall of any upscale structure.



Fixture is "Buy America Act" Compliant Proudly Made in the U.S.A.




Project Name:
Type:

Luxor - LUX LED Ordering Matrix

Environmental Lighting for Architecture, Inc.




1. Fixture: Matrix #: **LUX** Description: Luxor Fixture



LUX/24
Max. Wattage: 75W

2. Size: Matrix #: **24** Weight: 30 lbs. EPA: 1.2

3. Mounting: Matrix #: **BR** Description: Wall Bracket

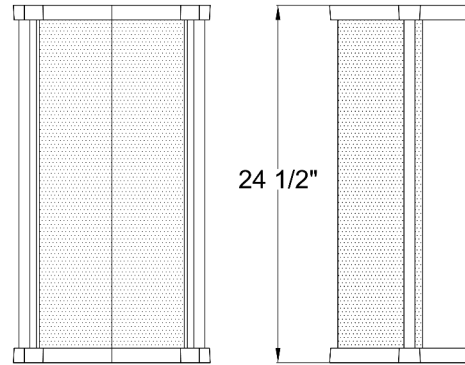

4. Distribution: Matrix #: **OP** Description: Illuminated Front, Top, and Bottom Ends
CT Illuminated Front and Bottom Ends and Closed Top End
CB Illuminated Front and Top Ends Closed Bottom End
CE Illuminated Frost Closed Top and Bottom Ends

Note: Reflector is a painted white finish. Consult factory for custom options.

5. Lamping:	<u>Matrix #:</u>	<u>Description:</u>	<u>Diodes</u>	<u>Lumens*</u>	<u>Wattage*</u>	<u>Efficacy</u>	<u>LED Drive (mA)</u>	<u>Standard Dimming Type**</u>
	35LED	LED Board	24	3360	35	96	292	1-10VDC, Triac, Forward Phase
	50LED	LED Board	56	4800	50	96	417	1-10VDC, Triac, Forward Phase
	69LED	LED Board	56	6624	69	96	575	1-10VDC, Triac, Forward Phase
	75LED	LED Board	100	9696	101	96	842	1-10VDC, Triac, Forward Phase

1) Other wattages & lumens available upon request.
2) Other dimming types available upon request.

6. Color Temps (k): Matrix #: **AM*** Amber Color Temp
27 2700k Color Temp
30 3000k Color Temp
40 4000k Color Temp
50 5000k Color Temp

Note: Other color temperatures & RGB's available upon request.
*Amber not available in corn cobs.

7. Voltage: Matrix #: **120** 120VAC
208 208VAC
240 240VAC
277 277VAC
347* 347VAC
480* 480VAC

*Contact ELA for details.

8. Lens: Matrix #: **CA** Clear Acrylic
FA Frosted Acrylic
OA Opal Acrylic

9. Finish: (Standard Powder Coat) Matrix #: **AG** Augustine Green
CC Charcoal
DB Dark Bronze
GY Architectural Grey
MG Malaga Green
MN Black - Midnight
PW Pewter
SB Statuary Bronze
VL Village Green
WH White

Note: Custom colors available upon request.

10. Options: Matrix #: **BBU** Battery Backup
PCB Photocell Button
TB Terminal Block
PCR3* 3 Pin Photo Control Receptacle
PCR5* 5 Pin Photo Control Receptacle
PCF7* 7 Pin Photo Control Receptacle
HSS House Side Shield

1. BBU test button location shall have visibility for testing on site. Consult factory for placement location.
2. BBU LED lumen output reduced in BBU mode.
3. ELA Can integrate client specified Wifi /remote control components upon request.
* See ELA for mounting options.

ELA Warranty Info: Environmental Lighting for Architecture, Inc. (ELA) offers a Five (5) Year Warranty on all products exclusively manufactured by ELA. Furthermore, ELA offers a Five (5) Year Warranty on all LED and LED components; and guarantees that no fewer than 90% of the diodes in each fixture will still be operating during this time. Please contact ELA for the details of each warranty.