




Project Name:
Type:

Environmental Lighting for Architecture, Inc.

Pantheon - PAN LED Ordering Matrix

Pantheon

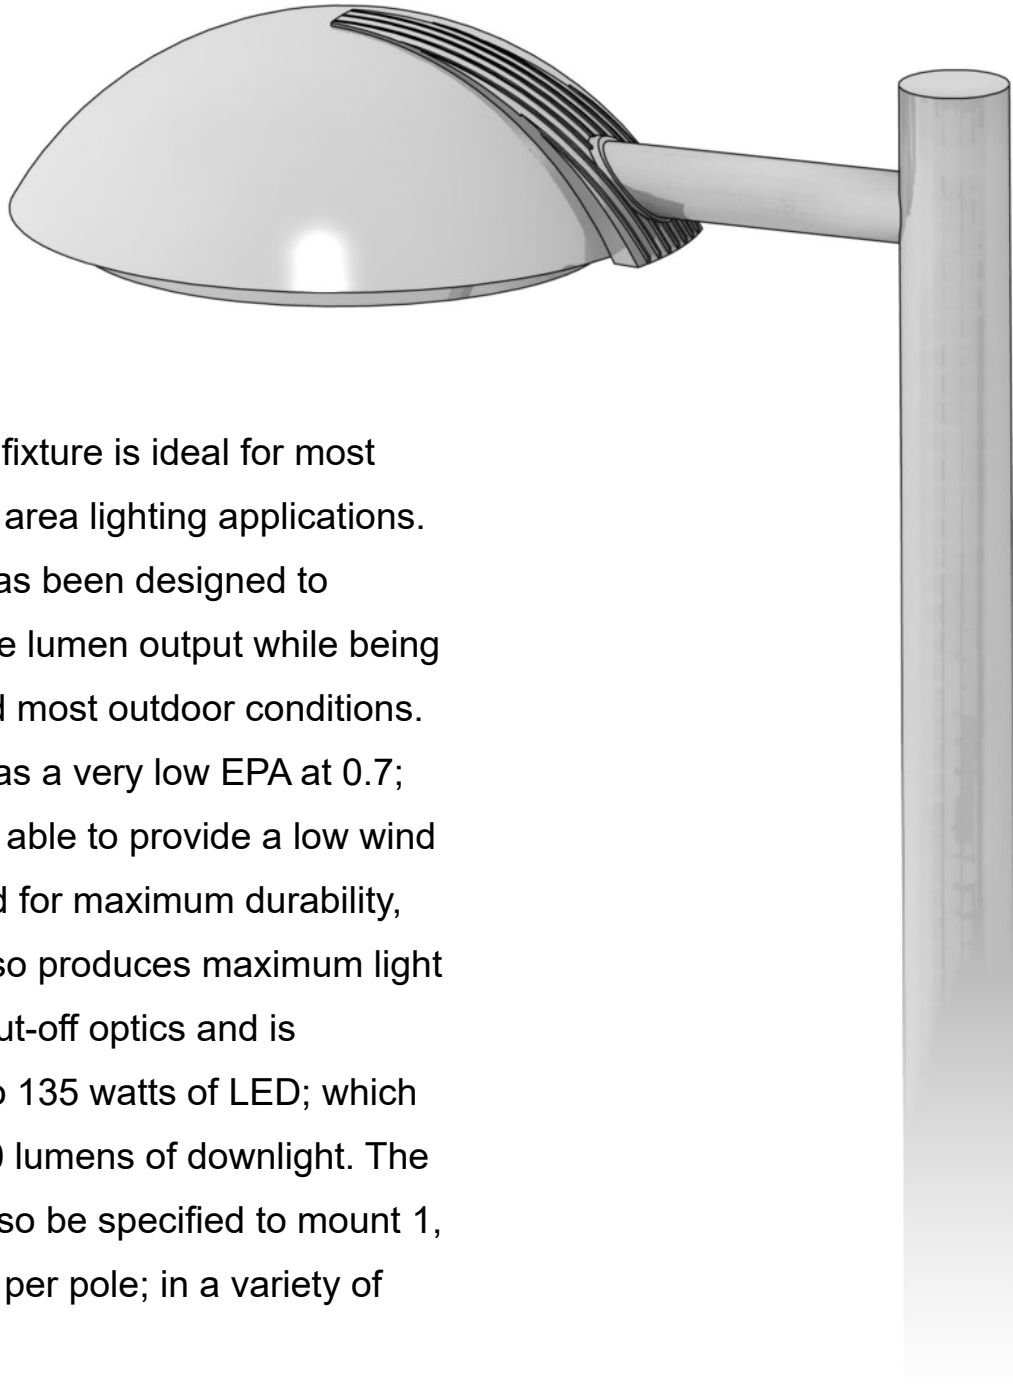

The Pantheon fixture is ideal for most outdoor site and area lighting applications. The Pantheon has been designed to provide maximize lumen output while being able to withstand most outdoor conditions. The Pantheon has a very low EPA at 0.7; and therefore, is able to provide a low wind rating. Designed for maximum durability, the Pantheon also produces maximum light output with full cut-off optics and is available in up to 135 watts of LED; which produces 12,960 lumens of downlight. The Pantheon can also be specified to mount 1, 2, 3 or 4 fixtures per pole; in a variety of patterns.



Fixture is "Buy America Act" Compliant Proudly Made in the U.S.A.



Project Name:
Type:

Pantheon - PAN LED Ordering Matrix

Environmental Lighting for Architecture, Inc.

1	2	3	4	5	6	7	8	9	10
PAN									



1. Fixture: Matrix #: **PAN** Description: Pantheon Fixture

2. Size: Matrix #: **24** Weight: 45 lbs. EPA: 0.7

3. Mounting: Matrix #: **CR***
BR* Description: Cross Arm
Wall Bracket

Note: The Pantheon offers a mounting sleeve to receive a 2"IP (2 3/8" Dia.) standard roadway arm. Other mounting combinations with ELA products or products "By Others" may require a specialized mounting adapter. Please contact ELA factory for options.

4. Distribution: Matrix #: **H2**
H3
H4
H5 Description: Type 2 - Horizontal
Type 3 - Horizontal
Type 4 - Horizontal
Type 5 - Horizontal

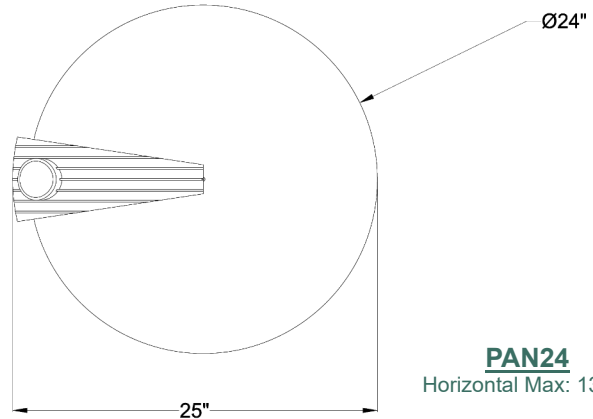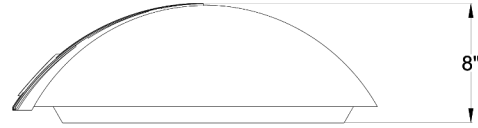

PAN24
Horizontal Max: 135W

5. Lamping:	Matrix #:	Description:	Diodes	Lumens*	Wattage*	Efficacy	LED Drive (mA)	Standard Dimming Type**
	35LED	LED Board	24	3360	35	96	292	1-10VDC, Triac, Forward Phase
	69LED	LED Board	56	6624	69	96	575	1-10VDC, Triac, Forward Phase
	101LED	LED Board	100	9696	101	96	842	1-10VDC, Triac, Forward Phase
	135LED	LED Board	100	12960	135	96	1125	1-10VDC, Triac, Forward Phase

*Other wattages & lumens available upon request.

**Other dimming types available upon request.

6. Color Temps (k): Matrix #: **AM***
27
30
40
50 Description: Amber Color Temp
2700k Color Temp
3000k Color Temp
4000k Color Temp
5000k Color Temp

Note: Other color temperatures & RGB's available upon request.

7. Voltage: Matrix #: **120**
208
240
277
347*
480* Description: 120VAC
208VAC
240VAC
277VAC
347VAC
480VAC

*Contact ELA for details.

8. Lens: Matrix #: **CG**
FG Description: Clear Tempered Glass
Frosted Tempered Glass

Note: Full cut off compliant

9. Finish: Matrix #: **AG**
CC
DB
GY
MG
MN
PW
SB
VL
WH Description: (Standard Powder Coat) Augustine Green
Charcoal
Dark Bronze
Architectural Grey
Malaga Green
Black - Midnight
Pewter
Statuary Bronze
Village Green
White

Note: Custom colors available upon request.

10. Options: Matrix #: **BBU**
PCB
TB
PCR3*
PCR5*
PCF7*
HSS Description: Battery Backup
Photocell Button
Terminal Block
3 Pin Photo Control Receptacle
5 Pin Photo Control Receptacle
7 Pin Photo Control Receptacle
House Side Shield

1. BBU test button location shall have visibility for testing on site. Consult factory for placement location.

2. BBU LED lumen output reduced in BBU mode.

3. ELA Can integrate client specified WiFi /remote control components upon request.

* See ELA for mounting options.

ELA Warranty Info:

Environmental Lighting for Architecture, Inc. (ELA) offers a Five (5) Year Warranty on all products exclusively manufactured by ELA. Furthermore, ELA offers a Five (5) Year Warranty on all LED and LED components; and guarantees that no fewer than 90% of the diodes in each fixture will still be operating during this time. Please contact ELA for the details of each warranty.