




Project Name:
Type:

Environmental Lighting for Architecture, Inc.

# Statesman - STN HID Ordering Matrix

## Statesman

The Statesman is a traditional six-sided lantern that's available in a variety of optics, mounting styles, and lamping options. A legacy in ELA's line for years, this timeless design is suitable for pole, cross arm, wall, or ceiling mounting conditions. The Statesman is a perfect specification for shopping malls, decorative street lighting, parking lots, government buildings, site and walkway lighting, schools, libraries, high-end residential applications, and much more. Constructed of high grade cast aluminum and finished with a powder coat finish, the Statesman is built to endure the toughest of outdoor conditions. Available with a maximum 400 watts of HID power. With its classic traditional style and superior durability, the Statesman is the perfect solution to a full array of lighting applications.

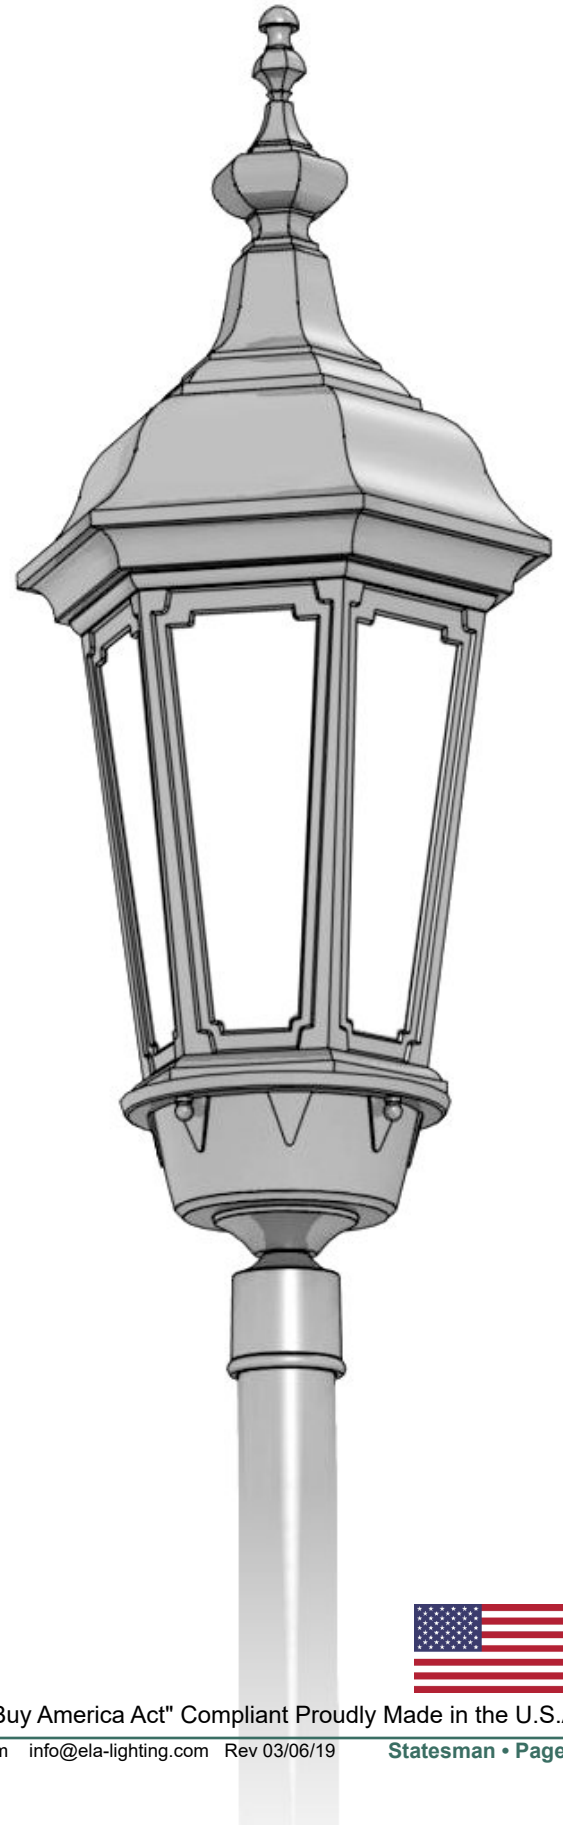

Fixture is "Buy America Act" Compliant Proudly Made in the U.S.A.



Project Name:
Type:

# Statesman - STN HID Ordering Matrix

Environmental Lighting for Architecture, Inc.

1	2	3	4	5	6	7	8	9
STN								

**1. Fixture:**      Matrix #:      Description:  
**STN**                      Statesman Fixture


**2. Size:**              Matrix #:      Weight:      EPA:  
**18**                      50 lbs.          1.4

**3. Mounting:**      Matrix #:      Description:  
**CA\***                      Cross Arm  
**PT\***                      Post Top  
**WB\***                      Wall Bracket  
**CP**                        Chain Pendant  
**SP**                        Stem Pendant  
**PM**                        Pier Mount

\* Specify which Cross Arm, Pole, or Wall Bracket is to be used. See ELA website for choices.

**4. Distribution:**      Matrix #:      Description:  
**H2**                        Type 2 - Horizontal  
**H3**                        Type 3 - Horizontal  
**H4**                        Type 4 - Horizontal  
**H5**                        Type 5 - Horizontal  
Horizontal  
**V3\***                        Type 3 - Vertical  
**V5**                        Type 5 - Vertical  
Vertical

\* Requires Prismatic Glass Refractor

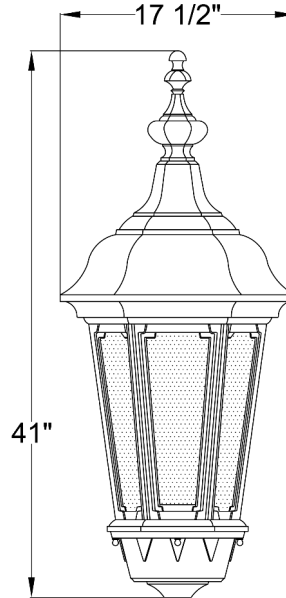

**Elevation View**  
Horizontal Max: 150W  
Vertical Max: 400W

<b>5. Lamping:</b>	<u>Description:</u> Pulse Start Metal Halide (Watts/Type)	<u>Description:</u> Metal Halide (Watts/Type)	<u>Description:</u> High Pressure Sodium (Watts/Type)	<u>Description:</u> Incandescent
	<u>Matrix #:</u> <b>50PSMH</b> <b>70PSMH</b> <b>100PSMH</b> <b>150PSMH</b> <b>175PSMH*</b> <b>200PSMH*</b> <b>250PSMH*</b> <b>400PSMH*</b>	<u>Matrix #:</u> <b>50MH</b> <b>70MH</b> <b>T6 70MH</b> <b>100MH</b> <b>T6 150MH</b> <b>250MH*</b> <b>400MH*</b>	<u>Matrix #:</u> <b>50HPS</b> <b>70HPS</b> <b>100HPS</b> <b>150HPS</b> <b>200HPS*</b> <b>250HPS*</b>	<u>Matrix #:</u> <b>INC*</b>

1. Electronic ballast available for 50, 70, 100, and 150 watt MH lamps.

2. Other wattages and ballasts available. Consult factory.

\* Fits vertical only.

\*Note: Incandescent socket supplied will be E26 Medium-Base (suitable for lamping by others), unless otherwise specified.

<b>6. Voltage:</b>	<u>Matrix #:</u>	<u>Description:</u>
	<b>120</b>	120VAC
	<b>208</b>	208VAC
	<b>240</b>	240VAC
	<b>277</b>	277VAC
	<b>347</b>	347VAC
	<b>480</b>	480VAC

<b>7. Lens:</b>	<u>Matrix #:</u>	<u>Description:</u>
	<b>CG</b>	Clear Glass
	<b>FG</b>	Frosted Glass
	<b>SG</b>	Seedy Glass
	<b>CA**</b>	Clear Acrylic
	<b>FA**</b>	Frosted Acrylic
	<b>OA**</b>	Opal Acrylic
	<b>HCG*</b>	Horizontal Clear Tempered Glass
	<b>HFG*</b>	Horizontal Frosted Tempered Glass

\*Full Cut-Off compliant.

\*\* Only available up to 70W Max

<b>8. Finish:</b> (Standard Powder Coat)	<u>Matrix #:</u>	<u>Description:</u>
	<b>AG</b>	Augustine Green
	<b>CC</b>	Charcoal
	<b>DB</b>	Dark Bronze
	<b>GY</b>	Architectural Grey
	<b>MG</b>	Malaga Green
	<b>MN</b>	Black - Midnight
	<b>PW</b>	Pewter
	<b>SB</b>	Statuary Bronze
	<b>VL</b>	Village Green
	<b>WH</b>	White

Note: Custom colors available upon request.

<b>9. Options:</b>	<u>Matrix #:</u>	<u>Description:</u>
	<b>BBU</b>	Battery Backup
	<b>PCB</b>	Photocell Button
	<b>TB</b>	Terminal Block
	<b>PCR3*</b>	3 Pin Photo Control Receptacle
	<b>PCR5*</b>	5 Pin Photo Control Receptacle
	<b>PCF7*</b>	7 Pin Photo Control Receptacle
	<b>HSS</b>	House Side Shield

**ELA Warranty Info:** Environmental Lighting for Architecture, Inc. (ELA) offers a Five (5) Year Warranty on all products exclusively manufactured by ELA. Furthermore, ELA offers a Five (5) Year Warranty on all LED and LED components; and guarantees that no fewer than 90% of the diodes in each fixture will still be operating during this time. Please contact ELA for the details of each warranty.